



www.optima.tc

optima[®]

Content

Optima® started manufacturing operations to provide high-quality products and services with state-of-the-art engineering applications in the physical security sector. **Optima®** has been one of the pioneers in finding specific solutions for its customers and exporting products all over the world. We blend the utmost powerful knowledge with 20+ years of experience and focus on continuous success.

1

About
Company

2

Exported
Countries

3

Business
Sectors

4

Crash
Tests

5

Products

- Road Blockers
- Bollards/Anti Vehicle Fence
- Barriers/Individual Parking Barrier
- Turnstiles
- Gates
- Gate Operators
- Tyre Killers
- Plate Recognition Systems/
- Parking Payment System
- Vehicle Recognition Systems
- Armored Product
- IOT/Scada Application
- Traffic Lamp

6

Contact
Information



About Company

Optima® Engineering Inc. is mainly dealing with manufacturing, engineering, and R&D business since 2000.

Group Companies

- Ulgen Industrial Systems INC.,
- Optima® Engineering INC.,
- Feridun Ulgen Factory for Hydraulic Gates & Barriers, Riyadh K.S.A
- Autogate Limited S.R.L., E.U.
- Sigma Industrial Systems Ltd., U.K.

Ulgen Industrial Systems Inc. is mainly dealing with sales, marketing, finance, logistics, foreign trade, after-sales and maintenance services, systems integration of security & building automation systems.

KSA Factory, Feridun Ulgen Factory for Hydraulic Gates & Barriers is established mainly to supply faster service, spare parts, and sales for all Gulf countries. The factory can produce high-volume products to produce more cost-effective products. With three technical support teams in the field, the factory can provide emergency response.

Autogate Limited S.R.L was established in the EU (Romania) as a facility to supply Optima® quality and products through Europe. Optima® is also ready to serve all customers in both European countries and worldwide with EUR-1 certification

Sigma Industrial System Ltd. is a UK-based company located in London. The main mission of the company is to provide the best services worldwide including exports, engineering feasibility studies, project execution, and testing&comissioning.

Exported Countries



“
and will
continue
increasing
day by day



Business Sectors

- Oil&Gas
- Military / Police Bases
- Government Buildings
- Embassies
- Borders
- Airports / Seaports
- Hotels / Malls
- Stadiums
- Palaces
- Commercial Buildings



 **Çarpma Test**
videolarımızı izlemek için
QR okutunuz.

optima[®]



ROADBLOCKERS

**ROAD
BLOCKERS**

Road Blockers



OPTIMA® ROAD BLOCKERS

Optima® Road Blockers are designed especially for entrance points which have a threat of vehicle attack or for the ones that have high security requirements. If there is a threat of vehicle attack in addition to the control of vehicle access in high security applications, road blockers are the unique solution and the most secure systems.

The range also includes road blockers for varying terrains and environments, including shallow foundations and surface mounting.

With the help of Optima® PLC, raise / lower function can be achieved by every kind of card readers, biometric readers like fingerprint or hand shape, radio control, on / off key switch, etc. Besides, safety accessories like inductive loop detectors, flashing lights or red / green traffic lights can be integrated into the system very easily.

Most of the Optima® Road Blockers are crashed tested and certified according to International Standards.



SYSTEM FEATURES IN ROAD BLOCKERS

Types	Embedded, Shallow, Surface Mount, Mobile
Crash Tested Models	HRR-HS-CT / HRR-HS-4100 / HRR- CT- SHM
Height Range (mm)	500-1250
Width Range (mm)	2000-6000
Standard Color	RAL1028 traffic yellow / RAL9005 black (can be customized)
Load Resistance	50 tons per axle
Structure	Heavy duty
Top Plate	Plain or checkered (optional), painted yellow with black stripes
Hinges	Special design hardened steel
Electrical Requirements	380 V, three phase, 50-60 Hz (or 220 V / 415 V etc., three phase, 50-60 Hz optional by a transformer)
Power Failure	Manual hand pump, Hydraulic accumulator, DC motor and batteries, UPS
Standard Speed	3-5 seconds, in emergency 1.5 seconds (optional)
Desktop Keyboard	Raise, lower, emergency stop, key operated, keyboard in use light indicator
Environmental Conditions	-15 °C and +65 °C, %95 non-condensing

ACCESSORIES

Dual vehicle safety loop detector
Traffic Light: Red / green LED, 200 mm diameter, Steel post 2 m height
Submersible drainage pump
Uninterrupted power supply (UPS)
DC motor and pump with dry batteries
Hydraulic accumulator
Hot-dip galvanizing
SCADA or any control system: It is possible to change and check the position of road blocker with a touch screen control panel, mobile devices (iOS-Android), computer, etc.

Patent
2014 / 13338



OPTIMA® | HRR-HS-CT
HYDRAULIC ROAD BLOCKER (ZERO PENETRATION)

Hydraulic, Embedded design, Actual PAS68 crash-tested (Zero Penetration), Width: 1500-6000 mm, Height: 1100 mm



OPTIMA® | HRR-HS-4100
HYDRAULIC ROAD BLOCKER

Hydraulic, Embedded design, Actual PAS68 crash-tested(P2 rated), Width: 1500-6000 mm, Height: 1000 mm



OPTIMA® | HRR-CT-SHM
SHALLOW MOUNT HYDRAULIC ROAD BLOCKER
(ZERO PENETRATION)

Hydraulic, Shallow design, Actual PAS68 crash-tested (Zero Penetration), Width: 1500-6000 mm, Height: 1250 mm



OPTIMA® | HRR-SHM
SHALLOW MOUNT HYDRAULIC ROAD BLOCKER

Hydraulic, Shallow design, Heavy-duty design with strong structure, Width: 1500-6000 mm, Height: 400-1250 mm

Road Blockers



OPTIMA® | HRR-HS
HYDRAULIC ROAD BLOCKER

Hydraulic, Embedded design, Heavy-duty design with strong structure, Width: 1500-6000 mm, Height: 400-1250 mm



OPTIMA® | PRR
PNEUMATIC ROAD BLOCKER

Pneumatic, Embedded design, Heavy-duty design with strong structure, Width: 1500-6000 mm, Height: 400-1100 mm

Road Blockers



OPTIMA® | EMR-HS
ELECTRO-MECHANICAL ROAD BLOCKERS

Electromechanical, Embedded design, Heavy-duty design with strong structure, Width: 1500-6000 mm, Height: 400-1100 mm



OPTIMA® | HRR-TLS
SHALLOW MOUNT TELESCOPIC ROAD BLOCKER

Hydraulic, Telescopic shallow design, Heavy-duty design with strong structure, Width: 1500-6000 mm, Height: 350-800 mm

Road Blockers



OPTIMA® | MHRB
MOBILE HYDRAULIC ROAD BLOCKER

Hydraulic, Mobile Design, Heavy-duty design with strong structure, Width 2500-5200 mm, Height: 400-1000 mm

Road Blockers



OPTIMA® | HRR-SM
SURFACE MOUNT HYDRAULIC ROAD BLOCKER

Hydraulic, Surface Mount Design, Heavy-duty design with strong structure, Width: 2500-5200 mm, Height: 400-1000 mm



optima[®]



BOLLARDS

BOLLARDS

Bollards



OPTIMA® BOLLARDS

Optima® bollards are designed for high security vehicle entrances, military, industrial, governmental and commercial buildings or streets which are closed to vehicle traffic between certain hours of the day. Most of the Optima® bollards are crashed tested and certified according to International Standards. With the help of PLC controlled electronics, raise / lower function can be achieved by every kind of card readers, biometric readers like fingerprint or hand shape, radio control, on / off key switch etc. Besides, safety accessories like photocells, inductive loop detectors, flashing lights or red / green lights can be integrated to the system.



SYSTEM FEATURES IN BOLLARDS

Types	Hydraulic, Pneumatic, Fixed ,Removable, Semi Automatic
Crash Tested Models	HRB-HS-CT / HRB Protector / FRB-01 Crash Tested / FXB-CT / FXB-CT-SHM
Height Range (mm)	500-1250
Diameter Range (mm)	100-355
Bollard Finish	Stainless steel sleeve or epoxy painted
Load Resistance	50 tons per axle
Structure	Heavy duty / Residential
Electrical Requirements (for Hydraulic models)	380 V, three phase, 50-60 Hz (or 220 V / 415 V etc., three phase, 50-60 Hz optional by a transformer)
Power Failure (for Hydraulic models)	Manual hand pump, Hydraulic accumulator, DC motor and batteries, UPS
Standard Speed (for Hydraulic models)	3-5 seconds, in emergency 1.5-2 seconds (optional)
Desktop Keyboard	Raise, lower, emergency stop, key operated, keyboard in use light indicator
Environmental Conditions	-15 °C and +65 °C, %95 non-condensing

ACCESSORIES

Dual vehicle safety loop detector
2 meter height photocell mounting pedestal for high truck detection (required for industrial sites)
Traffic Light: Red / green LED, 200 mm diameter, Steel post 2 m height
Submersible drainage pump
Flashing light on top of bollard
Decorative top flanges
Uninterrupted power supply (UPS)
DC motor and pump with dry batteries
Hydraulic accumulator
SCADA or any control system: It is possible to change and check the position of bollard with a touch screen control panel, mobile devices (iOS-Android), computer, etc.

Bollards



OPTIMA® | FRB-01
FIXED BOLLARD

Fixed, Embedded design, Actual PAS68 crash-tested (P2 rated), Diameter: 320 mm, Height: 900 mm



OPTIMA® | FXB-CT-SHM
SHALLOW MOUNT FIX BOLLARD
(ZERO PENETRATION)

Fixed, Shallow design, Actual PAS68 crash-tested (Zero Penetration), Diameter 355 mm, Height: 1100 mm



OPTIMA® | FXB-CT
FIXED BOLLARD

Fixed, Embedded design, Actual PAS68 crash-tested (Zero Penetration), Diameter: 320 mm, Height: 1100 mm



OPTIMA® | FXB-CT-R5
FIXED BOLLARD

Fixed, Shallow design, Actual PAS68 crash-tested (P2 rated), Diameter: 355 mm, Height: 900 mm



OPTIMA® | HRB-HS-CT
RETRACTABLE BOLLARD

Hydraulic, Actual PAS68 crash tested (P2 rated), Diameter: 355 mm, Height: 1100 mm



OPTIMA® | HRB-PROTECTOR
HYDRAULIC BOLLARD

Hydraulic, Actual PAS68 crash tested (Zero Penetration), Diameter: 355 mm, Height: 1250 mm



OPTIMA® | HRB-HS
HYDRAULIC BOLLARDS

Hydraulic, Heavy-duty design with strong structure, Diameter: 168-355 mm, Height: 400-1250 mm



OPTIMA® | RAB-800
BUILT-IN HYDRAULIC BOLLARD

Built-In Hydraulic, Heavy-duty design with strong structure, Diameter: 168-355 mm, Height: 400-1250 mm

Bollards

Bollards



OPTIMA® | RMB
REMOVABLE BOLLARD

Removable can be locked with the help of a key,
Diameter: 150-273 mm, Height: 700-900 mm



OPTIMA® | FXB
FIXED BOLLARD

Fixed, designed for closing the gaps permanently,
Diameter: 100-355 mm, Height: 500-1250 mm



OPTIMA® | RMB-SM
SURFACE MOUNT
REMOVABLE BOLLARD

Removable, surface mount, can be locked with
the help of a key, Diameter: 150-273 mm,
Height: 700-900 mm



OPTIMA® | FXB-SM
SURFACE MOUNT FIXED BOLLARD

Fixed, surface mount designed for closing the
gaps permanently, Diameter: 100-273 mm,
Height: 500-1250 mm

Bollards




OPTIMA® | PRB
PNEUMATIC BOLLARD

Pneumatic, Heavy-duty design with strong
structure, Diameter 168-355 mm,
Height: 400-1000 mm



OPTIMA® | SAB-100
SEMI AUTOMATIC BOLLARD

Semi-automatic, can be locked with the help of a
key Diameter: 215 mm, Height: 585 mm

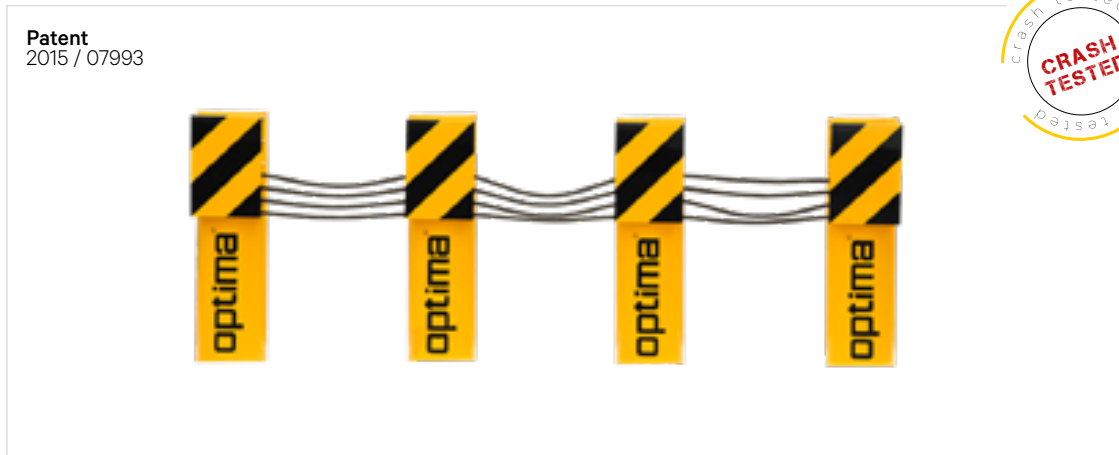

OPTIMA® | AVF CRASH TESTED ANTI-VEHICLE FENCING SYSTEMS

Fixed Fence, Chained, 12 meters modules, actual PAS68 crash tested

optima®



BARRIER

BARRIERS

Barriers



OPTIMA® BARRIERS

Barrier is designed for high flow traffics. Compare to the standard parking barriers, Optima® Barriers are suitable for harsh environments and intensive usage. With the help of a strong electric motor, the barrier can resist the hottest environmental conditions even it is used continuously.

Another strong advantage of Optima® barriers is a smooth operation by frequency controller which supplies a slow start / slow stop operation. This type of operation increases the mechanism usage of life significantly.

Some of the Optima® barriers are crashed tested and certified according to International Standards. Crash-tested barriers are designed especially for entrances where there is a threat of suicide vehicle attack, or for the entrances that have high-security requirements. If there is a threat of vehicle attack in addition to the control of vehicle access in high security applications, hydraulic drop arm barriers are one of the best and most secure solutions. Even though the attack is from high tonnage vehicles with high speeds, it is not possible for the vehicle to keep on moving forward anymore beyond the arm of the barrier.



SYSTEM FEATURES IN BARRIERS

Types	Hydraulic, Electromechanical, Manual
Crash Tested Models	HDAB-CT / MAB-CT
Arm Length (mm)	2000-8000
Arm Material	Aluminum with a special elliptical like cross-section design / Carbon steel
Structure	Heavy duty / Residential
Time Delay	It is set as 5 sec and its multiples (max: 35sec) (Can be disabled if desired)
Electrical Requirements	220 V (+/-%10), single phase, 50-60 Hz (for electromechanical barriers) 380 V, three phase, 50-60 Hz (for hydraulic barriers)
Power Failure	Release gear by allen key (for electromechanical barriers) Hand pump (for hydraulic barriers)
Environmental Conditions	-15 °C and +65 °C, %95 non-condensing

ACCESSORIES

Dual vehicle safety loop detector
Traffic Light: Red / green LED, 200 mm diameter, Steel post 2 m height
Flashing Light (flashes when the arm is in motion)
Button control box (open/close/emergency stop)
Radio receiver & antenna
Radio transmitter
Safety photocell & Photocell mounting pedestal with arm holder
Pendulum arm support
Articulated design for aluminum arms
Pneumatic edge safety sensor
Card reader mounting pedestal in front of the barrier with floor mounting flange, Gooseneck design with sunshade
Aluminum barrier skirt
Stop sign in the middle of barrier arm
Optima IOT Card developed for users who want to perform barrier control via mobile phones with Android and IOS operating systems
Reverse crossing warning
Quick pass alert
High speed crossing warning
SCADA or any control system: It is possible to change and check the position of barrier with a touch screen control panel, mobile devices (I / Os-Android), computer, etc.

Patent
2019 / 06917



OPTIMA® | B SERIES
CHALLENGER ELECTROMECHANICAL ARM BARRIER

Electromechanical, designed for harsh environment and heavy-use, galvanized cabinet with plastic cap, aluminum elliptical arm

Patent
2019 / 06917



OPTIMA®
CHALLENGER QUICK ELECTROMECHANICAL ARM BARRIER

Electromechanical, designed for harsh environment and heavy-use, galvanized cabinet with plastic cap, aluminum elliptical arm

Patent
2019 / 06917



OPTIMA® | CTY400 / CTY600
ELECTROMECHANICAL
ARM BARRIER


Electromechanical, designed for residential usage, galvanized cabinet with plastic cap, aluminum elliptical arm

Patent
2019 / 06917



OPTIMA® | CITY-ART
ELECTROMECHANICAL
ARTICULATED ARM BARRIER

Same features as CITY series barrier with added articulated kit

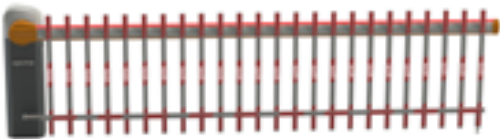

OPTIMA® | CHALLENGER
FENCE ARM BARRIER

Fence accessories can be added to ourB series and Challenger series models in order to take security further

Patent
2019 / 06917



OPTIMA® | CHALLENGER-ART
ELECTROMECHANICAL
ARTICULATED ARM BARRIER

Same features as Challenger B series barrier with added articulated kit

Barriers



OPTIMA® | MAB-CT
MANUAL DROP ARM BARRIER

Manual, smooth operation, Actual PAS68 crash tested, easy installation, width: 3000-6000 mm



OPTIMA® | MDAB
MANUAL DROP ARM BARRIER

Manual, smooth operation, heavy-duty with strong structure, easy installation, width: 3000-6000 mm

Barriers



OPTIMA® | HDAB-CT
HYDRAULIC DROP ARM BARRIER (ZERO PENETRATION)

Hydraulic, double piston support, Actual PAS68 crash tested, easy installation, width: 3000-7500 mm



OPTIMA® | HDAB
HYDRAULIC DROP ARM BARRIER

Hydraulic, heavy-duty with strong structure, easy installation, width: 3000-6000 mm



OPTIMA® | VLB
VERTICAL LIFT BARRIER SERIES

Electromechanical, vertical movement, heavy-duty with strong structure, easy installation, width: 3000-6000 mm



OPTIMA® | MB
MANUAL ARM BARRIER

Manual, smooth operation, counterweight design, designed for only control purpose (no crash resistance)



OPTIMA® | HAB-CR
HYDRAULIC ARM BARRIER K4

Hydraulic, heavy-duty with strong structure, K4 rated design, easy installation, width: 3000-6000 mm



OPTIMA® | HAB
HYDRAULIC ARM BARRIER

Hydraulic, designed for harsh windy environment, arm is aluminum (circular design), width: 2000-8000 mm

Individual Parking Barriers



OPTIMA® | PMS 100
MANUAL PERSONAL
PARKING BARRIER

Mechanical, can be locked by a key, material is made of steel for long resistance



OPTIMA® | PAS100
AUTOMATIC PERSONAL
PARKING BARRIER

Electromechanical by 2 option: by battery or by direct power supply, material is made of steel for long resistance



OPTIMA® | CHB CHAIN-BARRIER

Electromechanical, suitable for long parking areas, can close the gaps up to 16 m, 3rd party devices can be integrated



optima[®]



TURNSTILES

TURNSTILES

Turnstiles



OPTIMA® TURNSTILES

Optima® turnstiles / speed gates provide aesthetic and effective control of entry or exit at kinds of toll collection systems like train / metro stations, and access control for commercial centers, stadiums, schools, government, and private sector buildings, etc.

With the help of controlled electronics, a raise / lower function can be achieved by every kind of card reader, a biometric reader like fingerprint or hand shape, radio control, on / off key switch, etc.

Full Height Turnstiles are the unique solution for unmanned entrances with a high level of security requirements. Only one person is permitted to pass on each turn of the turnstile. This is achieved by three / four groups of wings, standing 120/90 degrees apart on the square/triangular cross sectioned rotor beam.

Advanced microelectronics; fine mechanics processed on CNC machines; contactless position sensing technology; hydraulic damper with adjustable damping ratio; self-centering mechanism design and rust preventing precautions are some of the main factors resulting in full height turnstiles' trouble-free, long operation life.



SYSTEM FEATURES IN TURNSTILES

Types	Tripod / Speed Gates / Full Height / Swing
Speed Gates	
Models	HG100 / C100 / SSG100 / DA100 / SHG100 / DAT100
Material	304 Stainless Steel (316 SS optional)
Operation	Electromechanical
Electrical Requirements	220 V (+/-%10), single phase, 50-60 Hz
Power Failure	Fail safe
Tripod Turnstiles	
Models	V100 / V200 / V201 / V300
Material	304 Stainless Steel (316 SS optional)
Operation	Electromechanical / Manual
Electrical Requirements	220 V (+/-%10), single phase, 50-60 Hz
Power Failure	Fail safe / Fail secure
Full Height Turnstile	
Models	F100 / F100D / F100C / F100G / F100-SDR / F200S
Material	304 Stainless Steel (316 SS optional)
Operation	Electromechanical / Manual
Electrical Requirements	220 V (+/-%10), single phase, 50-60 Hz
Power Failure	Fail safe / Fail secure
Swing Turnstiles	
Models	RAG100 / RAG200 / MSW
Material	304 Stainless Steel (316 SS optional)
Operation	Electromechanical / Manual
Electrical Requirements	220 V (+/-%10), single phase, 50-60 Hz
Power Failure	Fail safe

Turnstiles



OPTIMA® | C100S
SWING SPEEDLANE
(SHORT FLAP)

Electromechanical, motor-driven, swing movement, tempered glass wings (short), stainless steel body, handicapped option available



OPTIMA® | SSG100S
SLIDING SPEED GATE
(SHORT FLAP)

Electromechanical, motor driven, sliding movement, tempered glass wings (short), stainless steel body



OPTIMA® | C100L
SWING SPEEDLANE
(LONG FLAP)

Electromechanical, motor-driven, swing movement, tempered glass wings (long), stainless steel body, handicapped option available



OPTIMA® | SSG100L
SLIDING SPEED GATE
(LONG FLAP)

Electromechanical, motor driven, sliding movement, tempered glass wings (long), stainless steel body

Turnstiles



OPTIMA® | HG100
HIDDEN SPEED GATE

Electromechanical, motor driven, sliding movement, tempered glass wings, stainless steel body, handicapped option available



OPTIMA® | DAT100
DROP ARM TURNSTILE

Electromechanical, motor-driven, stainless steel circular arms, stainless steel body



OPTIMA® | V300
TRIPOD TURNSTILE

Electromechanical, selonoid mechanism, stainless steel tripod arms, completely closed stainless steel body



OPTIMA® | V201
TRIPOD TURNSTILE

Electromechanical, selonoid (optionally with motor) mechanism, stainless durable black glass arms, stainless steel body

Turnstiles



OPTIMA® | V200
TRIPOD TURNSTILE

Electromechanical, selonoid mechanism, stainless steel tripod arms, stainless steel body



OPTIMA® | V100
TRIPOD TURNSTILE

Electromechanical, selonoid mechanism, stainless steel tripod arms, stainless steel body (designed for narrow spaces)



OPTIMA® | F100G
FULL HEIGHT TURNSTILE
(GLASS TYPE)

Electromechanical, selonoid mechanism, rotating glass arms, full height stainless steel body covered with glasses



OPTIMA® | F100-SDR
AUTOMATIC
REVOLVING DOOR

Electromechanical, motor driven, revolving glass wings, full-height aluminum body covered with glasses

Turnstiles



OPTIMA® | F100
FULL HEIGHT TURNSTILE

Electromechanical, selonoid mechanism, 90 / 120 degree arm design, full height stainless steel body (carbon steel as an option)



OPTIMA® | F100D
FULL HEIGHT TURNSTILE
(DOUBLE)

Electromechanical, selonoid mechanism, 90 / 120 degree arm design, double-sided full height stainless steel body (carbon steel as an option)



OPTIMA® | F100C
FULL HEIGHT TURNSTILE
(CAGE TYPE)

Electromechanical, selonoid mechanism, 90 / 120 degree arm design, full-height cage type stainless steel body (carbon steel as an option)



OPTIMA® | F200S
FULL HEIGHT TURNSTILE
(GLASS ARM)

Electromechanical, motor driven, 120 degree arm design,full height body

Turnstiles



OPTIMA® | HH100
HALF HEIGHT TURNSTILE

Electromechanical, solenoid mechanism, 90 / 120 degree arm design, half-height stainless steel body (carbon steel as an option)



OPTIMA® | F100DB
BICYCLE TURNSTILE

Electromechanical, two sides full height stainless steel body (one side is for pedestrians, one side is for bicycle)



OPTIMA® | RAG100
ROTARY AUTOMATIC SWING GATE

Electromechanical, motor-driven, swing movement, glass wings, body made of stainless steel tube



OPTIMA® | RAG-200
ROTARY AUTOMATIC SWING GATE

Electromechanical, motor-driven, swing movement, stainless steel arm and body



OPTIMA® | MSW
MANUAL SWING TURNSTILE

Mechanical, swing movement, stainless steel arm, body made of stainless steel tube



optima[®]



GATES

Gates



OPTIMA® GATES

Optima® Gates are designed for residential, commercial, industrial, and military applications. If there is a threat of vehicle attack in addition to the control of vehicle access in high-security applications, crash-tested sliding gates are the unique solution and the most secure system. Most of the Optima® gates are crashed tested and certified according to International Standards. Even though the attack is from high tonnage vehicles with high speeds, the vehicle can't keep on moving because the damage is given to the vehicle with the gate's durable structure. Optima Gate operators are designed for businesses, places such as gardens and private ownership, high traffic, commercial and industrial applications. Any kind of card readers, biometric readers, radio control, key switches, etc. can be used to start or stop the electro-hydraulic swing gate operator, with the help of PLC (Programmable Logical Control) controls.



SYSTEM FEATURES IN GATES

Types	Sliding, Swing, Folding, Cantilever, Telescopic Pedestrian
Crash Tested Models	SG-CT / SG-HDCR
Height Range (mm)	1000-4000
Width Range (mm)	2000-12000
Standard Color	RAL1028 traffic yellow / RAL9005 black (can be customized)
Structure	Heavy duty
Environmental Conditions	-15 °C and +65 °C, %95 non-condensing

ACCESSORIES

Dual vehicle safety loop detector
Traffic Light: Red / green LED, 200 mm diameter, Steel post 2 m height
Radio receiver & antenna
Radio transmitter
Uninterrupted power supply (UPS)
Anti-climb wire mesh
Hot-dip galvanizing
Safety edge sensor
Dual Push Button/Push Button
SCADA or any control system: It is possible to change and check the position of gate with a touch screen control panel, mobile devices (iOS-Android), computer, etc.



OPTIMA® | SG-CT
SLIDING GATE (CLOSED TO VISION) (ZERO PENETRATION)

Electromechanical, actual pas68 crash tested, closed to vision , integrated with Optima® ESGO Sliding Motor



OPTIMA® | SG-HDCR
SLIDING GATE (ZERO PENETRATION)

Electromechanical, actual pas68 crash tested, vertical steel bar design , integrated with Optima® ESGO Sliding Motor



OPTIMA® | SG SLIDING GATE

Electromechanical, strong steel structure, vertical steel bar design , integrated with Optima® ESGO Sliding Motor



OPTIMA® | CG CANTILEVERED GATE

Electromechanical, strong steel structure, vertical steel bar design, cantilevered (no rail) operation, integrated with Optima® ESGO Sliding Motor



OPTIMA® | SWG SWING GATE

Hydraulic, strong steel structure, vertical steel bar design, swing operation with heavy-duty hinges, integrated with Optima® SWGO hydraulic operator



OPTIMA® | FG FOLDING GATE

Hydraulic, strong steel structure, vertical steel bar design, folding type with heavy-duty hinges, integrated with Optima® SWGO hydraulic operator



OPTIMA® | TSG TELESCOPIC SLIDING GATE


Electromechanical, suitable for wide openings, strong steel structure, vertical steel bar design, integrated with Optima® ESGO Sliding Moto



OPTIMA® | PSG PEDESTRIAN SECURITY GATE

Manual, hydraulic closer as an option. Designed for subsidy sliding gate and turnstiles

optima[®]

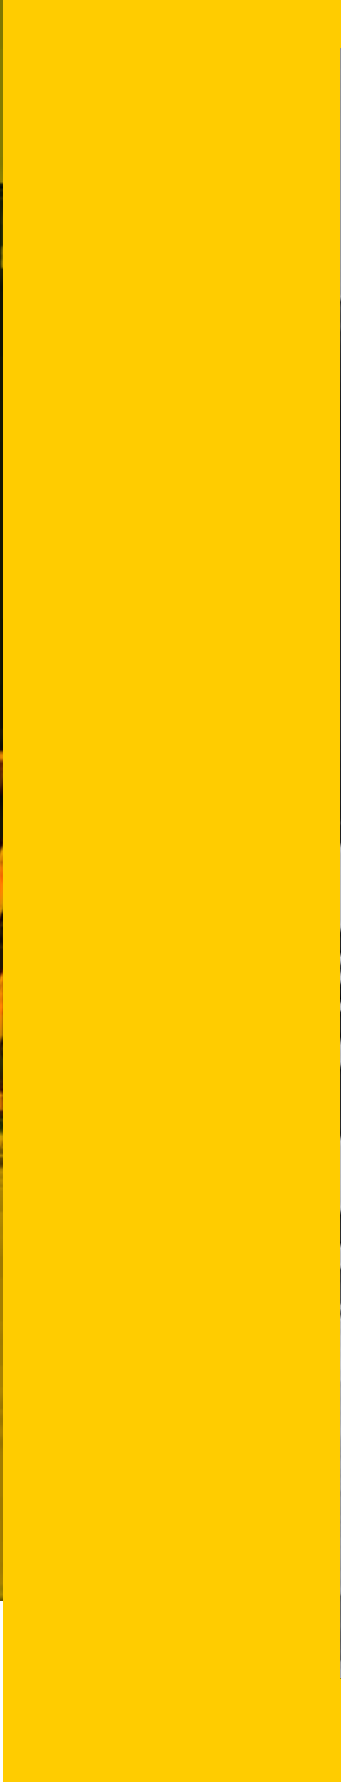

OPERATOR'S
GATE

GATE OPERATORS

Gate Operators



OPTIMA® GATES OPERATORS

Optima® ESGO300/600 electromechanical sliding gate operators are designed for businesses, places such as gardens and private ownership. ESGO300/600 operator is suitable for gates that weigh up to 600 kg. The lower body is manufactured with aluminum injection, the upper cover is manufactured with plastic injection.

Optima SWGO-1000 electro-hydraulic swing gate operators are designed for high traffic, commercial and industrial applications. SWGO-1000 operator is suitable for gates that weigh up to 1000 kg.

Flashing lamp, plastic rack, safety photocell, remote control receiver/transmitter products are supplied with the product. Depending on the customer’s request, the accessories on the next page offer an optional solution to our customers.

In addition, by integrating with our IoT/Optima Cloud solution, it can offer the option to control the door operator with mobile devices (IOS-Android), computer etc.



SYSTEM FEATURES IN GATE OPERATORS

Types	ESGO 4000, ESGO 600, ESGO 300, SWGO 1000
Safety	Safety photocell, Flashing Light
Electrical Requirements	220 V (+/-%10), Single phase, 50-60 Hz (380V, three phase optional)
Power Failure	Discharge cap
Desktop Keyboard	Raise, lower, emergency stop, key start, keyboard in use light indication

ACCESSORIES

Dual vehicle safety loop detector
Traffic Light: Red / green LED, 200 mm diameter, Steel post 2 m height
Radio receiver/receiver & antenna
Push Button
Galvanized steel rack
Uninterrupted power supply (UPS)
Hot-dip galvanizing
Safety photocell
SCADA or any control system: It is possible to change and check the position of gate with a touch screen control panel, mobile devices (IOS-Android), computer, etc.



OPTIMA® | ESGO300
ELECTROMECHANICAL SLIDING GATE OPERATOR

Electromechanical, can drive the gates up to 300kg, included accessories: flashing light, galvanized rack, push / button box, safety photocell.



OPTIMA® | ESGO600
ELECTROMECHANICAL SLIDING GATE OPERATOR

Electromechanical, can drive the gates up to 600kg, included accessories: flashing light, galvanized rack, push / button box, safety photocell.



OPTIMA® | ESGO 4000
ELECTROMECHANICAL SLIDING GATE OPERATOR

Electromechanical, can drive the gates up to 4 tons, included accessories: flashing light, galvanized rack, push / button box, safety photocell



OPTIMA® | SWGO-1000
ELECTRO-HYDRAULIC SWING GATE OPERATOR

Hydraulic, can drive the gates up to 1000kg (double wings), ncluded accessories: flashing light, hydraulic cylinder, push i/ button box, safety photocell

optima[®]



TYRE KILLERS

Tyre Killers



OPTIMA® TYRE KILLERS

Optima® Tyre Killers are a part of vehicle access control systems in which a vehicle cannot enter without permission. Tyres of the unpermitted vehicle split up immediately, therefore the vehicle moves only a few more meters and is stopped. Jaws of the tyre killer move all together. The drive unit is placed to one end of the tyre killer for electro-mechanical type; it stands above the ground level and is a complete assembly with the body. In this way, both smooth transmission of motion and minimum effect of external factors are achieved.




SYSTEM FEATURES IN TYRE KILLERS

Mechanical Tyre Killers	
Types	Embedded, Surface Mount
Width (mm)	1000 mm modules
Spike Height	10 cm embedded / 6 cm surface mount
Color	RAL1028 traffic yellow / RAL9005 black
Spike Movement	Self balanced
Optional Feature	Latch down mechanism

Electromechanical Tyre Killers	
Types	Embedded / Surface Mount
Width (mm)	1000-6000
Spike Height	10 cm embedded / 6 cm surface mount
Color	RAL1028 traffic yellow / RAL9005 black
Electrical Requirements	220 V, single phase, 50-60 Hz

Hydraulic Tyre Killer	
Width (mm)	2000-6000
Spike Height	25-50 cm
Color	RAL1028 traffic yellow / RAL9005 black
Electrical Requirements	380 V, three phase, 50-60 Hz

ACCESSORIES	
Dual vehicle safety loop detector	
Traffic Light: Red / green LED, 200 mm diameter, Steel post 2 m height	
Radio receiver & antenna / transmitter	
Safety photocell & Photocell mounting pedestal with arm holder	
Uninterrupted power supply (UPS)	
DC motor and pump with dry batteries (for hydraulic tyre killer only)	
SCADA or any control system: It is possible to change and check the position of road blocker with a touch screen control panel, mobile devices (I / Os-Android), computer, etc.	

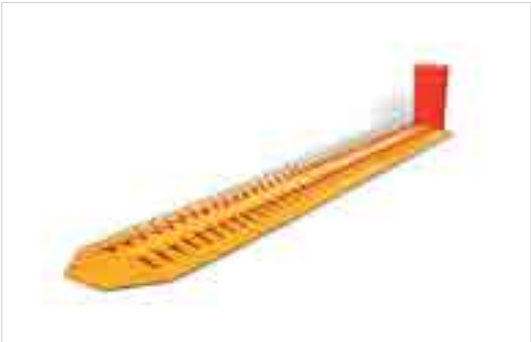

OPTIMA® | ETK-SM
ELECTROMECHANICAL TYRE KILLER
(SURFACE MOUNT)

Electromechanical, surface mount double-sided spike design, galvanized for long time outdoor resistance



OPTIMA® | ETK
ELECTROMECHANICAL TYRE KILLER
(FLUSH MOUNT)

Electromechanical, embedded double-sided spike design, galvanized for long time outdoor resistance



OPTIMA®
BTK-300SM / BTK-600SM
ELECTROMECHANICAL TYRE KILLER WITH ARM BARRIER
(SURFACE MOUNT)

Electromechanical Tyre Killer with integrated arm barrier, surface mount double-sided spike design, galvanized for long time outdoor resistance



OPTIMA® | BTK-300 / BTK-600
ELECTROMECHANICAL TYRE KILLER WITH ARM BARRIER
(FLUSH MOUNT)

Electromechanical Tyre Killer with integrated arm barrier, embedded double-sided spike design, galvanized for long time outdoor resistance



OPTIMA® | MTK-100SM
MECHANICAL TYRE KILLER
(SURFACE MOUNT)

Manual, latch down option is available, surface mount design, galvanized for long time outdoor resistance



OPTIMA® | MTK-100
MECHANICAL TYRE KILLERS
(FLUSH MOUNT)

Manual, latch down option is available, embedded structure, galvanized for long time outdoor resistance



OPTIMA® | HTK
HYDRAULIC TYRE KILLER

Hydraulic, strong design with min 25cm height spike, heavy duty structure, designed for high security requirement.

optima[®]



PLATE RECOGNITION SYSTEMS

PLATE RECOGNITION

Plate Recognition Systems



OPTIMA® PLATE RECOGNITION SYSTEMS

Optima® ALPR-100 is a next generation Automatic License Plate Recognition System providing faster and more reliable solutions. The system recognizes international plate formats and styles. Customized modules are available for maximum performance for different types of license plates at several countries. It has suitable modules for highways, parking lots or facility entrances, mobile operations.

Optima ALPR-101, the license plate recognition system, offers security, ease of use, and 100% customer satisfaction. The system has state-of-art hardware and software technologies and provides customer-oriented, flexible solution opportunities. Optima license plate recognition system is capable of working in integration with access systems such as sliding gates and barriers at the entrances and exit areas of sites. The system doesn't require any vehicle tags, barcodes, or user cards. The entry and exit processes are carried out automatically by scanning the vehicle's number plate. The system has a user-friendly, modern interface unique to Optima.

Optima PPS-100, is the best innovative parking management and payment system for an intuitive parking experience. Its latest hardware and software technology facilitates user-friendly functionality regarding management, data storage, revenue tracking, database statistical analysis, reporting, and tracking features.

SYSTEM FEATURES IN PLATE RECOGNITION SYSTEMS

PLATE RECOGNITION SYSTEMS	
Types	ALPR-100, ALPR-101
Stream Format	JPEG, H.264
Frame Rate	50FPS
Lens - Disc	5-50 Varifocal - 120 GB
Processor	O-Internal Processor Unit
Illumination	IR Led (50M.)
Network Protocol	TCP/IP, UDP, HTTP, FTP, SMTP, NTP, DHCP, RTP
Operation Temp.-Humidity:	-20°C / 60°C (-4°F / 140°F) / 95% or less (non-condensing).

PARKING PAYMENT SYSTEM	
Processing Unit	Windows, Linux, Ubuntu, MacOS
Tracking System	Plate Recognition System, Ticket Terminal
Payment System	Exit Payment Point
Mobile Application	IOS-Android
Disc	Min. 1TB HDD/ Min. 250 GB SSD

Plate Recognition Systems

Plate Recognition Systems



OPTIMA® ALPR-100
LICENSE PLATE RECOGNITION
SYSTEM FOR HIGHWAYS

Optima® ALPR-100 Automatic License Plate Recognition System recognizes international plate formats and styles. Customized modules are available for maximum performance for different types of license plates at several countries. It has suitable modules for highways, parking lots or facility entrances, mobile operations. The system offers a detailed, web-based database search and an alarm system for wanted, seized and stolen vehicles.

MAIN FEATURES

Vehicle Recognition	Min %99
Correct Reading	Min %92
Reading Directions	Arrival and Departure
Square/ Formal / Private / International (Latin and Arabic Alphabet) Plates	Available
License Plateless Vehicle Detection	Available
Vehicle Classification	Min %80 (Optional)
Brand and model	Min %70 (Optional)
Color Recognition	Min %60 (Optional)
Motion Detection	Available (Software Based) (Optional)



OPTIMA® ALPR-101
LICENSE PLATE RECOGNITION
SYSTEM FOR COMPOUNDS

Optima® ALPR-101 Automatic License Plate Recognition System is capable of working in integration with access systems such as sliding gates and barriers at the entrances and exit areas of sites. The system doesn't require any vehicle tags, barcodes, or user cards. The entry and exit processes are carried out automatically by scanning the vehicle's number plate.

MAIN FEATURES

Vehicle Recognition	Min %99
Correct Reading	Min %92
Reading Directions	Arrival and Departure
Square/ Formal / Private / International (Latin and Arabic Alphabet) Plates	Available
License Plateless Vehicle Detection	Available
Vehicle Classification	Min %80 (Optional)
Brand and model	Min %70 (Optional)
Color Recognition	Min %60 (Optional)
Motion Detection	Available (Software Based) (Optional)

Parking Payment System



OPTIMA® PPS100 PARKING PAYMENT SYSTEM

Optima® PPS-100, is the best innovative parking management and payment system for an intuitive parking experience. Its latest hardware and software technology facilitates user-friendly functionality regarding management, data storage, revenue tracking, database statistical analysis, reporting, and tracking features.

MAIN FEATURES


- Ability to work in integration with access systems (Barrier, Gates, etc.)
- Dedicated system management (Administrator, Operator, Security guard, etc.)
- Parking lot-based and operator-based revenue tracking
- Management of subscribed and blocked license plates by whitelist and blacklist applications
- System monitoring and documentation with daily, monthly, status-based reports
- Density tracking with the smart panel, estimated density, and income information
- Full control with remote connection, mobile compatibility and mail reporting
- System integration based on the parking lot operation scenario
- Detecting plateless vehicles or vehicles with unreadable license plate

OPTIMA CLOSELY FOLLOWS
THE **LATEST TECHNOLOGY** AND
PRODUCES NEW PRODUCTS BY
BLENDING ITS **OWN DEVELOPED**
SOFTWARE WITH ITS OWN
SECURITY PRODUCTS.

- **Ability to work in integration with access systems (Barrier, Gates, etc.)**
- **Dedicated system management (Admin, operator, Security guard, etc.)**
- **Ability to add vehicles to the blacklist (Banned Vehicles)**
- **Density tracking with the smart panel, estimated density, and income information.**
- **Easy integration into existing systems.**
- **Detailed reporting of system data.**
- **Ability to control system via OPTIMA mobile application.**
- **Full control with remote connection, mobile compatibility and mail reporting.**



optima[®]

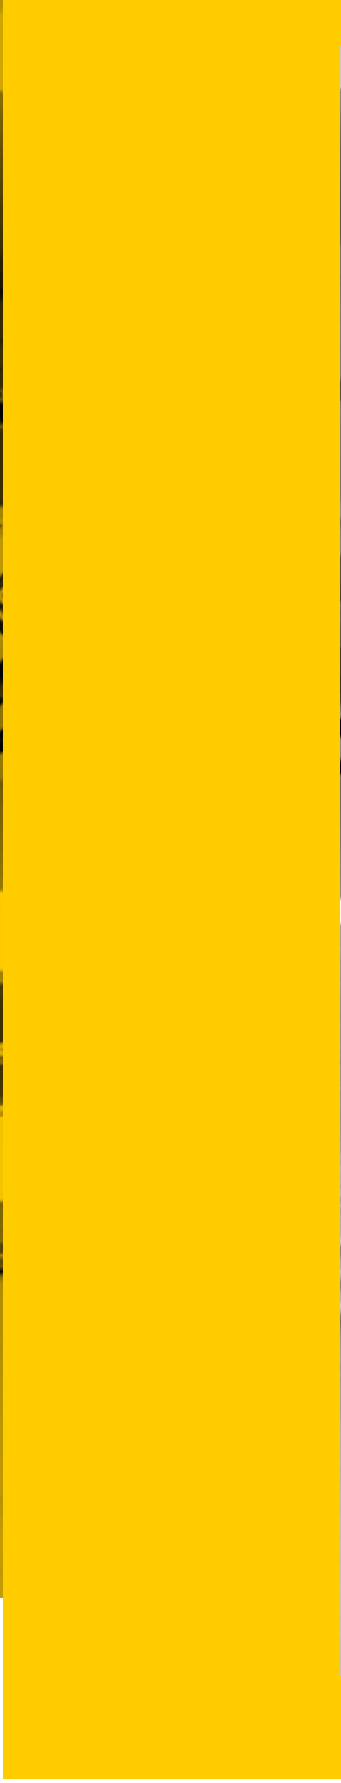

VEHICLE RECOGNITION SYSTEMS

**VEHICLE
RECOGNITION
SYSTEMS**

Vehicle Inspection System



OPTIMA® | VEHICLE INSPECTION SYSTEM

Optima®UVIS-100 Under Vehicle Inspection System are designed with advanced security technology to scan inspect and record underside of all vehicles. These systems are used especially for entrances where there is a threat of suicide vehicle attack with explosives or for the entrances that have very high security requirements like military, industrial, governmental and commercial buildings, sites, complexes etc

UVIS-100 under vehicle inspection system provides users needed safe are, thereby capturing and monitoring underside image of the vehicles with a high-resolution auto digital area scanning camera. In addition the system specifies suspicious objects after under vehicle scan process and takes them into a frame on the monitoring screen. Thanks to system's advanced electronics; many type of security systems such as road bollards, road blockers, barriers etc. or plate recognition systems can be integrated to the system

Optima FCS-100 face Drivers Image Capture Camera is a subside system of Optima ALPR-100 automatic license plate recognition. It enables to record drivers image into the system with the related vehicle plates while enters. By using high resolution camera, it is possible to get clear driver face images.



SYSTEM FEATURES IN VEHICLE INSPECTION SYSTEM

Types	Flush Mount ,Surface Mount
Sensor	Axis sensitivity 1.5 counts / miligauss.
Industrial Area Scan Camera	-Color Camera 5Mp -Image ata Interface Gigabit Ethernet (1000 Mbit/s). -Frame Rate per second 30 fps.
Processing unit	-CPU Core™ i7. System Memory 2 x 204-pin DDR3-1333/1600mhz SO-DIMM, up to 16GB. -NVIDIA GeForce GPU'su -Min 250 GB M2 SSD + Min 1 TB HDD
Standard Equipment that Comes with the System	Loop Detector, System Processing Unit, Giga Ethernet Switch, Power Led Light, Industrial Area Scanning Camera,Web Interface Operator Concole
Loop Detector	System Processing Unit, Giga Ethernet Switch, Power Led Light, Industrial Area Scanning Camera,Web Interface Operator Concole

SYSTEM FEATURES IN FCS DRIVER IMAGE CAPTURE CAMERA

Power Consumption	250 Watt
Shutter	Rolling Shutter
Max Image Circle	1 / 3.7"
Sensor Type - Size	CMOS - 4.2 mm x 2.4 mm
Resolution (HxV)	1920px x 180px
Pixel Size (HxV)	2.2 μm x 2.2 μm

Vehicle Inspection System



OPTIMA® | UVIS-100
UNDER VEHICLE INSPECTION SYSTEM (FLUSH MOUNT)

Optima® UVIS-100 Under Vehicle Inspection System (Flush Mount) are designed with advanced security technology to scan inspect and record underside of all vehicles.



OPTIMA® | UVIS-100SM
UNDER VEHICLE INSPECTION SYSTEM (SURFACE MOUNT)

Optima® UVIS-100SM Under Vehicle Inspection System (Surface Mount) are designed with advanced security technology to scan inspect and record underside of all vehicles.



Vehicle Inspection System



OPTIMA® | FCS-100
DRIVER / VEHICLE IMAGE CAPTURE CAMERA

Optima® FCS-100 face Drivers Image Capture Camera is a subside system of Optima® ALPR-100 automatic license plate recognition.

optima[®]

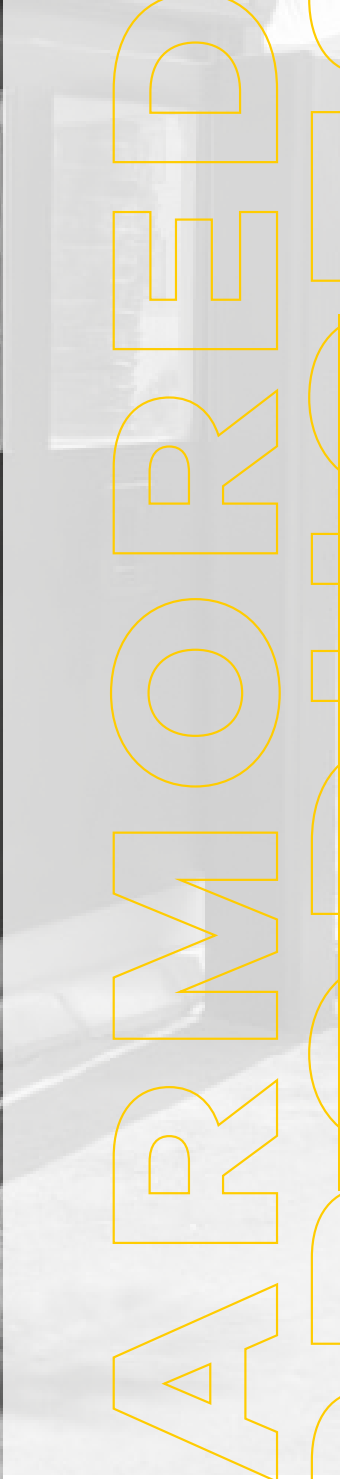

**ARMORED
PRODUCTS**

ARMORED
PRODUCTS



OPTIMA® | ARMORED PRODUCTS

Optima® armored products are designed especially for places that have a high threat of terrorist attacks, suicide vehicle attacks or for the ones that have high-security requirements.

Optima® armored products are secure to attacks with machine-gun bullets; full metal jacket, pointed bullet, hardcore, armored piercer (B7 Class). Armor grade B7 is tested and certified by internationally recognized third-party laboratories.

For all our products, different size and protection class options are available. Any kind of accessories can be added according to customer requests.



SYSTEM FEATURES IN ARMORED PRODUCTS

Armored Guard House

Balistic Protection Level	B3 / B4 / B5 / B6 / B7
Room Dimensions (cm)	236 (h) X 225 (w) X 285 (l) (can be customized)
Approximate Room Vol. (m³)	10
Optional Item	360° Shooting Tower Rotation
Tower Dimensions (cm) (if added)	133.5 (h) X 121 (w) X 128.5 (l)
Tower Vol. (m³) (if added)	1

Standard armored guard house includes

Viewing Armored-Glass Windows
Shooting opening
Opening for passing documents in and out of the guard house
Flashing light and audible alarm on room's top outside
Outer lamps facing left, front and right sides. They can be directed from inside manually. They can be rotated 360 degrees left to right and + / - 45 degrees up and down
Base for wireless communication, Electric sockets, Cable conduits
Room is fully insulated for water, heat transfer and sound

Bulletproof Pedestrian Security Gate

Balistic Protection Level	B3 / B4 / B5 / B6 / B7
Direction	Single, swing gate
Operation	Manual
Appearance	Completely covered
Standard Height (mm)	2100
Standard Width (mm)	1200

Bulletproof Pedestrian Security Gate

Balistic Protection Level	B3 / B4 / B5 / B6 / B7
Operation	Electromechanical / Hydraulic
Appearance	Completely covered
Height (mm)	1500-3500
Width (mm)	2000-10000
Motors	ESGO 4000 Sliding gate motor SWG0 1000 Swing gate motor

Bulletproof Window

Frame	Bulletproof
Glass	Bulletproof
Dimensions	As per site requirements



OPTIMA® | BPSG
BULLETPROOF PEDESTRIAN SECURITY GATE

B3 / B7 level. Heavy duty hinges. Hydraulic closer. Completely closed but includes space to check visitors.



OPTIMA® | BPSWG
BULLETPROOF SLIDING / SWING GATE

B3 / B7 level. Swing or sliding operation. Completely closed bulletproof design. Electromechanical motor sliding gate / hydraulic system for swing gate. Manual option is available.



OPTIMA® | AGH-10T
ARMORED GUARD HOUSE


B3 / B7 level. Shooting turret can be added as an option. Spaces for posts, spaces for shooting. Electric sockets. Comfortable area for guards. Customized design is available.



OPTIMA® |
BULLETPROOF WINDOW

B3 / B / level. Glass is certified by supplier. Can be designed as per site requirements. Covered with bullet proof steel profiles.

optima[®]

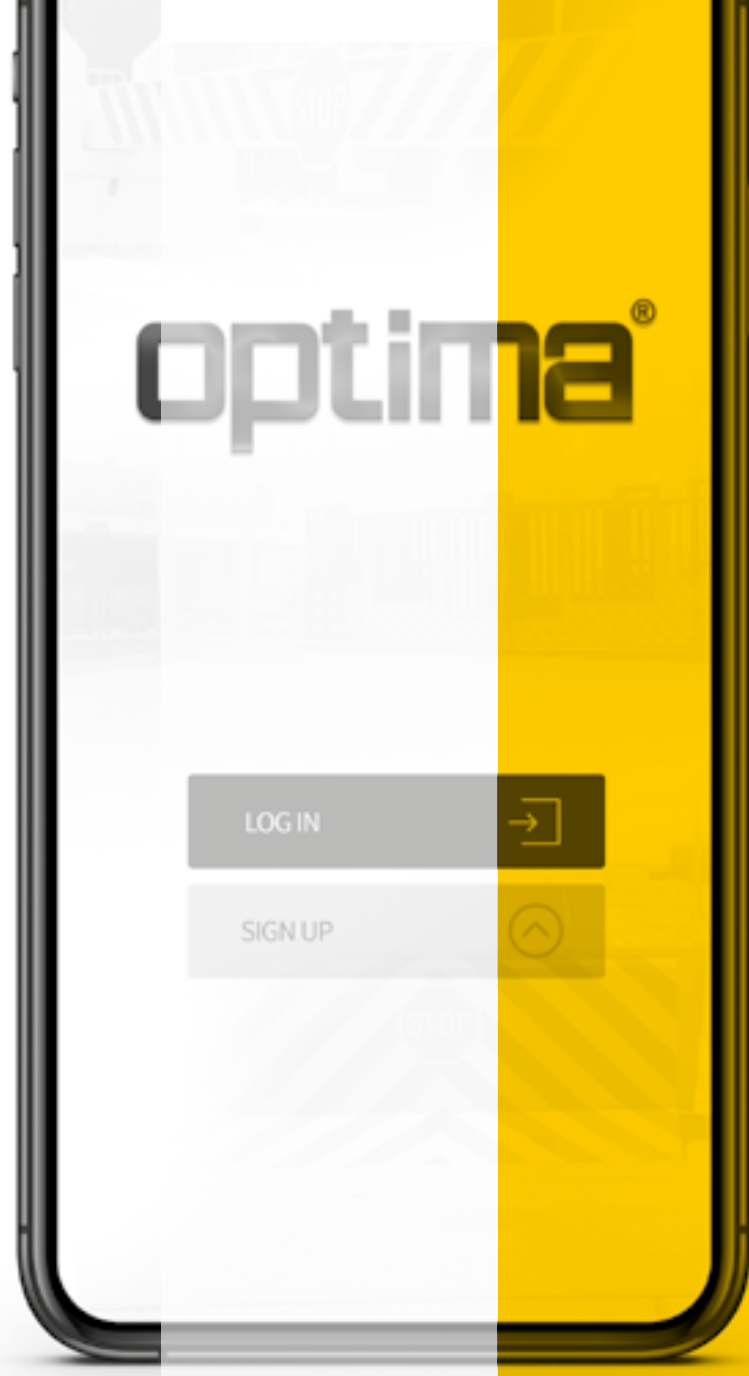

IOT / SCADA APPLICATIONS

**IOT / SCADA
APPLICATIONS**

IOT / Scada Applications



Can be integrated to all automation and security products of any brand

Control by SMS, Calling, Internet, Web Interface and Bluetooth



IOT / Scada Applications



IOT / Scada Applications




OPTIMA® IOT / SCADA APPLICATION

Optima® SCADA (Scada Application) System is software that monitors and controls multiple commercial and industrial security equipment like road blockers, barriers, sliding gates, etc. from one central control room. The system collects information, makes necessary analyses and provides control of all equipment and monitors that information on an operator screen.

Thanks to the SCADA System, open / close or raise / lower functions can be achieved and current positions of the equipment can be monitored on line. It is possible to get number of operations, number of vehicles entered and exit, passing information for a person, unauthorized passage information and many more. Besides, an additional IP camera can be integrated to the system to enable monitoring of transition zone in a real time.

Transmission Control Protocol / Internet Protocol called TCP / IP is used in communicating data across networks. Due to this, SCADA System can be controlled from all over the world through a web server on internet.

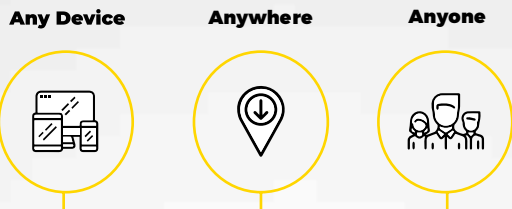

IOS-Android Devices

(Mobile Phone, Tablet, PC, The free APP is available for all the latest IOS&Android Devices)



Remote Access, User Management Multiplatform, Easy Install



High and Last Technology



16 I/O as your Requirement



Open, Close and Status of the Gate Actuator



%100 Secure, Each Device has Unique ID




Cloud Based



Log Record

optima[®]

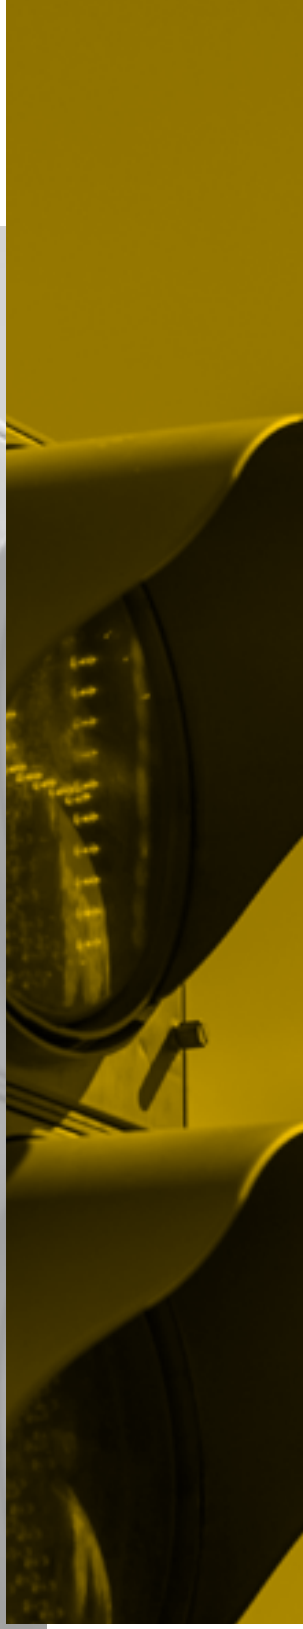

**TRAFFIC
LAMP**

**TRAFFIC
LAMP**

Traffic Lamp




OPTIMA® TL-200 TRAFFIC LAMP

Optima® provides solutions with its own produced traffic lamp at parking lot entrances, traffic training areas, in front of opening/sliding doors, inside facilities, road connections, intersections, pedestrian crossings and wherever traffic needs to be controlled.

SYSTEM FEATURES IN TRAFFIC LAMP

Power	220V (+/-%10), 50/60 Hz
Reflector Diameter	200 mm
Material	Polycarbonate (100%PC)
Housing Color	Black
Power Consumption	9 Watt / Module
Light Distribution	Fresnel Lens
Environmental Conditions	IP65

DIMENSIONS

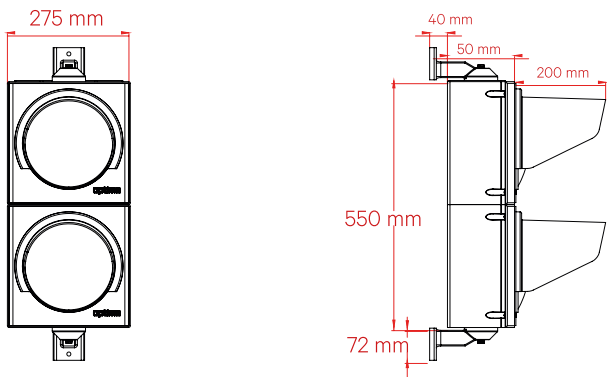

www.optima.tc

FACTORY

OPTIMA ENGINEERING INC.

Başkent OSB. 19. Cad. No: 62 Maliköy 06909

Sincan / Ankara / TÜRKİYE

P. +90 312 815 15 00 F. 90 312 815 12 98

optima@optima.tc | www.optima.tc

EXPORT SALES & MARKETING

ULGEN INDUSTRIAL SYSTEMS INC.

İlkbahar Mahallesi 621. Sokak No: 11, 06550

Çankaya / Ankara / TÜRKİYE

P. +90 312 472 59 77 F. 90 312 472 59 78

admin@ulgen.com.tr | www.ulgen.com.tr

KSA FACTORY

FERIDUN ULGEN FACTORY FOR HYDRAULIC GATES AND BARRIERS

Al Fowzan Rimash Industrial Zone,

Al Mishal Dist 2851, Riyadh 14328-6950, KSA

M. +966 53 892 64 46 T / F. +966 11 415 04 06

ksa@ulgen.com.tr

AUTOGATE LIMITED S.R.L

Sector 3, Splaiul Unirii, nr. 313, Constructia C1,

Bucuresti / ROMANIA

info@autogatelimited.com | www.autogatelimited.com

SIGMA INDUSTRIAL SYSTEMS LIMITED

17, Green Lanes, London, N16 9BS,

United Kingdom

P. +44 7388540418

info@sigmaindustrialsystems.com

www.sigmaindustrialsystems.com



optima®



PAS 68:2013
K1500000000000



IWA 14-1:2013
K1500000000000



ISO 9001
ISO 9001:2015

