



# ProtaStructure Suite 2026 – New Features

Version: 1.0

May 2025

Please get in touch with us for your training and technical support queries.

[asiastupport@protasoftware.com](mailto:asiastupport@protasoftware.com) | [globalsupport@protasoftware.com](mailto:globalsupport@protasoftware.com)

Publisher



**Limitation of Responsibilities**

While Prota ensures every new update is tested, Prota shall not be held responsible for any losses caused by documentation, software, or usage errors.

In addition to Prota License Agreement Terms, it is the responsibility of the user:

- to check results generated by documentation and software,
- make sure that the users of the software and their supervisors have adequate technical capabilities,
- Ensure the software is appropriately used according to the reference manual and documentation.

**Intellectual Property**

ProtaStructure is a registered trademark of **Prota Yazılım Bilişim ve Mühendislik A.Ş.**, and all intellectual property rights belong to **Prota Yazılım Bilişim ve Mühendislik A.Ş.** Documentation, training, reference manuals, and any program component cannot be copied, distributed, and used in violation of the license agreement.

**Trademarks**

**ProtaStructure®**, **ProtaDetails®**, **ProtaSteel®**, and **ProtaBIM®** are registered trademarks of Prota Software Inc. Prota logo is a trademark of Prota Software Inc.



# Contents

Introduction.....	6
ProtaStructure 2026: Innovation Meets Excellence .....	7
Brand-New Technologies.....	8
New RC Staircase Module.....	9
New Steel Base Plate Module.....	10
Subbasement Walls, Beams and Slabs .....	11
Design of Cruciform Columns .....	12
New Foundation Pedestals .....	13
Multiple User-Defined Spectra in All Directions .....	14
Extended Code Support and Design .....	15
Performance Assessment and Retrofit to ASCE/SEI 41-17 .....	16
Performance Assessment and Retrofit to Eurocode 8-Part 3.....	17
Brazilian Codes (NBR) Support - Load Combinations and Steel Design .....	18
Eurocode Nationally Determined Parameters (NDP) Editor .....	19
Eurocode 8 Seismic Design for Steel and Concrete Members.....	20
Eurocode 8 Torsional Irregularity Check using Torsional Radius .....	21
Eurocode 8 Automated Prevailing Failure Mode Coefficient ( $k_w$ ) Calculation.....	22
Eurocode 8 - Shearwall Moment & Shear Design Envelope .....	23
Modal Vertical Earthquake Analysis .....	26
Customizable Eurocode Vertical Spectrum .....	27
Eurocode 8 Dual System Wall-Frame Interaction Checks.....	28
Eurocode 2 Long Term Deflection Checks Including Creep and Shrinkage .....	29
Eurocode 3: Design of Castellated Beams .....	30
Crack Width Checks.....	31
IS Code: Load Transfer Check from Column to Footing.....	31
Foundation Tie Beam Design to ACI318 .....	32
Enhanced Pad Footing Design .....	33
Minimum Pad Footing Depth to Use Side Bars.....	34
Maximum Pad Footing Depth.....	35
Analysis Improvements .....	36
Punching Checks with Finite Elements .....	37
Inclusion of Column Outlines.....	37



Editable Accidental Eccentricity and Overturning Safety Factors .....	40
Designate Storeys as 'Intermediate' .....	41
Meshing Same Storey Slabs Positioned on Top Of Each Other .....	42
Using Quad Mesh for Slabs in FE Analysis .....	43
Shearwall Stiffness Modifiers Only in Critical Storeys.....	44
Automated Soil Dynamic Load Cases and Snow Drift Load Cases .....	45
Automated Body Constraints in Column Outlines .....	46
Automated Unit Conversion for Ground Motions .....	47
Modeling and Visualization .....	48
A Customizable Shortcut Editor.....	49
Architectural DXF Drawing Overlay in Load Editor .....	51
Continuous Girts (and Purlins).....	54
Display Support Reactions in Analysis Post-Processor.....	56
Contour Labels in Analysis Post-Processor .....	57
Contour Legend at the Bottom in Analysis Post-Processor .....	57
Exclusive Default Materials for Steel Members.....	58
New Metal Deck Types in Library .....	59
Extended Cold-Formed Section Library .....	60
Utilization Ratio Coloring for RC Members.....	61
Color Assignment to Loads.....	62
Enhancements in Member Relabeling.....	63
View Modes in Right-Click Menu.....	63
Number of Studs and Camber in Frame Labels .....	64
Support Assignment and Cantilever Frame Members.....	65
Optimized Ribbon and Right Click Menu .....	66
Frame Member Storey Assignment.....	67
Search by Labels in Analysis Post-Processor.....	68
Section and Material Labels in Analysis Post-Processor .....	68
Advanced BIM Integration.....	69
Support for IFC4 Format .....	70
IFC-Singapore Template .....	71
Export Internal Forces to IdeaStatica .....	71
Steel Material Lists in ProtaStructure .....	72
Filtering and Post-processing Analysis Results .....	73
Image Export with Transparent Background .....	75



RC Detailing .....	76
Building Elevation Section .....	77
New Bent-Up and Straight Bar Patterns for Slabs .....	79
Foundation Beams, Rib Beams and Slabs Rebar Schedule .....	80
Subbasement Wall Details.....	81
Pedestal Details .....	82
ProtaSteel: Innovating with Strength .....	84
Export Internal Forces to IdeaStatica .....	85
Purlin Connections on Curved Beams.....	86
Splice Connections in Pipe and Box Sections.....	86
Fin Plate Connections to SHS and RHS Primary Members.....	87
Connection Macros for Truss Top and Bottom Chords .....	87
IFC 4 Support.....	88
Improved Curved Beam Connections.....	88
General Stability and Performance Improvements .....	89
New Design Guides and Videos .....	89
What's Next? .....	89
Thank You .....	90



# Introduction

As Prota, we have been developing leading structural BIM software for over 40 years.

Priority on our product strategy has always been:

1. Providing new practical modeling approaches
2. Introducing innovative design technologies that will add value to your business and extend your toolset in your daily engineering practice.
3. To improve the existing functionalities
4. To introduce more localization in our products, so that you can benefit from our technology much better.

ProtaStructure 2025 is our brand-new release, a significant step taken to fulfill this strategy, raise the bar for competition, and meet expectations. Developing a comprehensive structural BIM analysis, design, and detailing solution is challenging teamwork in meeting user and industry expectations. We sincerely thank all our users for their trust in our products.

We are confident that you will enjoy and benefit from the features and improvements in **ProtaStructure Suite 2026**. You can find the details on the pages to follow.

Thank you for choosing ProtaStructure.



# ProtaStructure 2026: Innovation Meets Excellence

In our latest major release, ProtaStructure 2026, we're excited to unveil a range of new features designed to enhance user experience and boost efficiency. Our primary focus has been on expanding existing code support, improving stability and performance, and incorporating valuable user feedback.

Here are the **outstanding** improvements and new features in ProtaStructure 2026.

- New Interactive RC Stairs Module
- Steel Base Plate Modeling and Design in ProtaStructure
- Design of Cruciform Columns
- Subbasement Walls and Subbasement Slabs
- Modeling and Design of Foundation Pedestals
- User-defined Spectra in three orthogonal directions with streamlined workflow
- Assessment and Retrofit to ASCE/SEI 41
- Assessment and Retrofit to Eurocode 8 – Part 3 (EN1998-3:2005)
- Brazilian Code (NBR) Support for Load Combinations and Steel Design
- Eurocode Nationally Determined Parameters (NDP) Editor
- Eurocode 8 Seismic Design for Steel and Concrete Members
- Customizable Vertical Earthquake Spectrum according to Eurocode 8
- Improved Eurocode 8 Irregularity and Building Checks
- Long Term Deflections with Creep and Shrinkage according to Eurocode 2
- Design of castellated beams according to Eurocode 3
- RC Beam, Rib Beam and Slab Crack Width Checks (US, EC, IS and other codes)
- Customizable Shortcut Editor
- New Support for IFC 4 and IFC-Singapore BCA Template for CoreNetX platform
- New rebar patterns for slabs
- Rebar schedules for foundation beams, rib beams and slab rebars
- Building Section Drawing including all storeys and infill walls
- Comprehensive improvements in ProtaSteel including Internal force export to IdeaStatica, new drawing module with UNDO feature, new and improved connection macros and more...

For detailed explanations and more items please refer to the next pages.




# Brand-New Technologies



## New RC Staircase Module

We are thrilled to present our new RC stairs module, a result of our dedicated efforts. This innovative module allows you to interactively model RC stairs, seamlessly integrate them into the building model using a library of frequently used stair types. (Create-your-own-stairs functionality will be available in the very near future with more out-of-the-box stair types)

Our new RC Stairs module enables you to easily model the stairs in the building model and create an integrated FE model that includes the stairs with a compatible meshing. Analysis results are automatically extracted from FE model and used in the design of flights and landings backed by a detailed report and detail drawings.

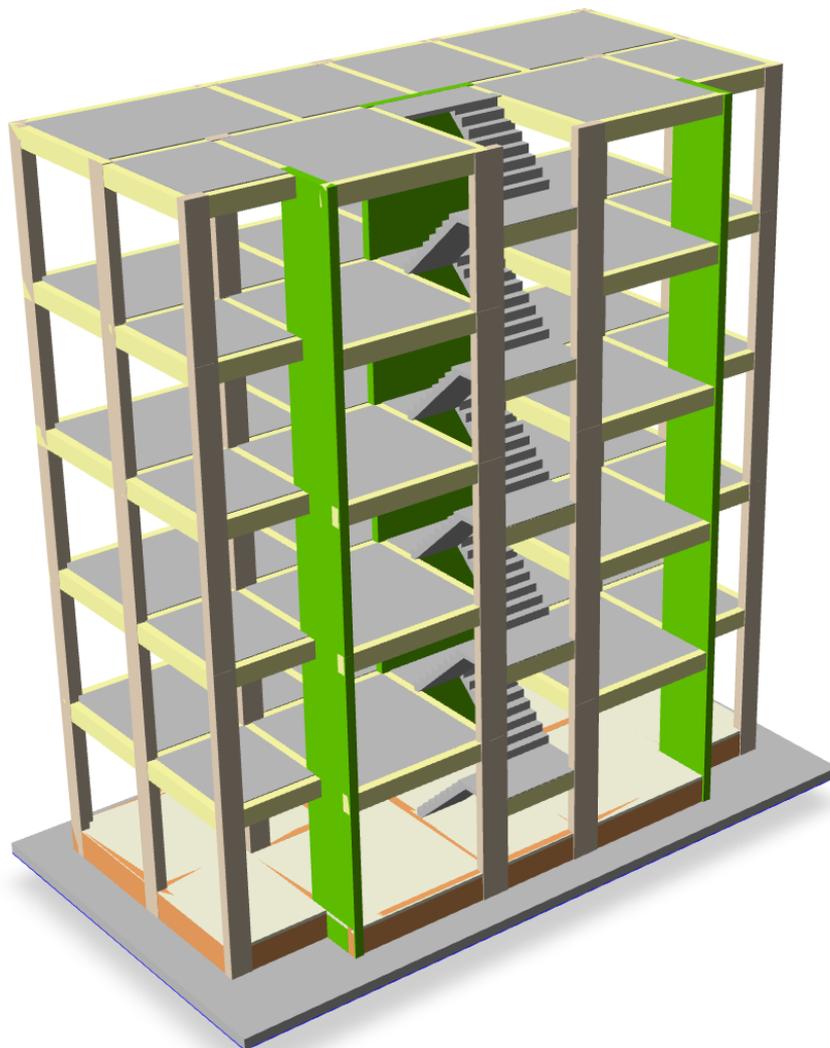

Please refer to our new design guide on the new RC Staircase Module for detailed explanations, modeling tips and more:

**ProtaStructure Design Guide – New RC Staircase Module**




## New Steel Base Plate Module

We have developed a comprehensive parametric macro for inserting base plates under steel columns, also allowing you to visualize them in plan and 3D view.

In addition to what we already have in ProtaSteel for base plates, ProtaStructure 2026 introduces brand-new base plate modeling and design macro integrated with ProtaStructure itself. This powerful tool allows for precise and efficient modeling of base plates, ensuring optimal design and performance. With its user-friendly interface and advanced features, the new macro streamlines the design process following ACI318, AISC360, AISC Design Guides, EC2, EC3 and Turkish codes including anchorage design.

### Important:

The new base plate module supports the analytical design of only certain stiffener and bolt configurations for I-shaped and box profiles. A general-purpose base plate design easily becomes too complicated to cover all possible scenarios. Base plates in ProtaStructure can be sent to ProtaSteel for detailing and to IdeaStatica for CBFEM analysis (if required).

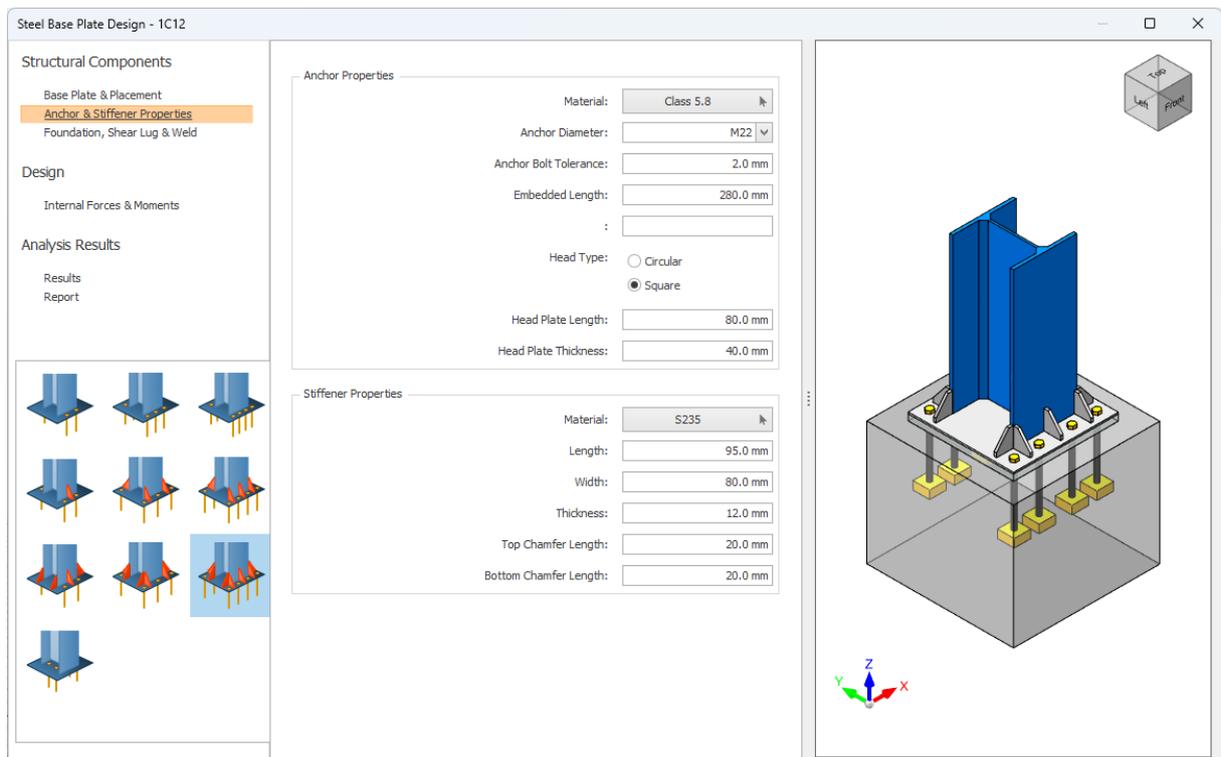

Please refer to our new design guide on the New Steel Base Plate Module for detailed explanations, modeling tips and more:


**ProtaStructure Design Guide – New Steel Base Plate Module Connections**



## Subbasement Walls, Beams and Slabs

Subbasement walls are usually considered as a part of the foundation and provide support for the infills on the ground storey and contains the fill on the foundation. ProtaStructure 2026 enables the users to model these walls on foundation level and optionally consider them in the analysis. Previously it was harder to model these walls, requiring additional storeys or deep beams.

Like subbasement walls, subbasement beams and slabs are also considered as a part of the foundation. They are usually built on top of the fill contained by subbasement walls. Subbasement slabs are reinforced by mesh reinforcement. ProtaStructure now enables you to model these beams and slabs as a part of the foundation and mesh them compatibly with neighboring members. Previously it was not possible to insert and mesh these slabs on top of mat foundation slab (at different elevations).

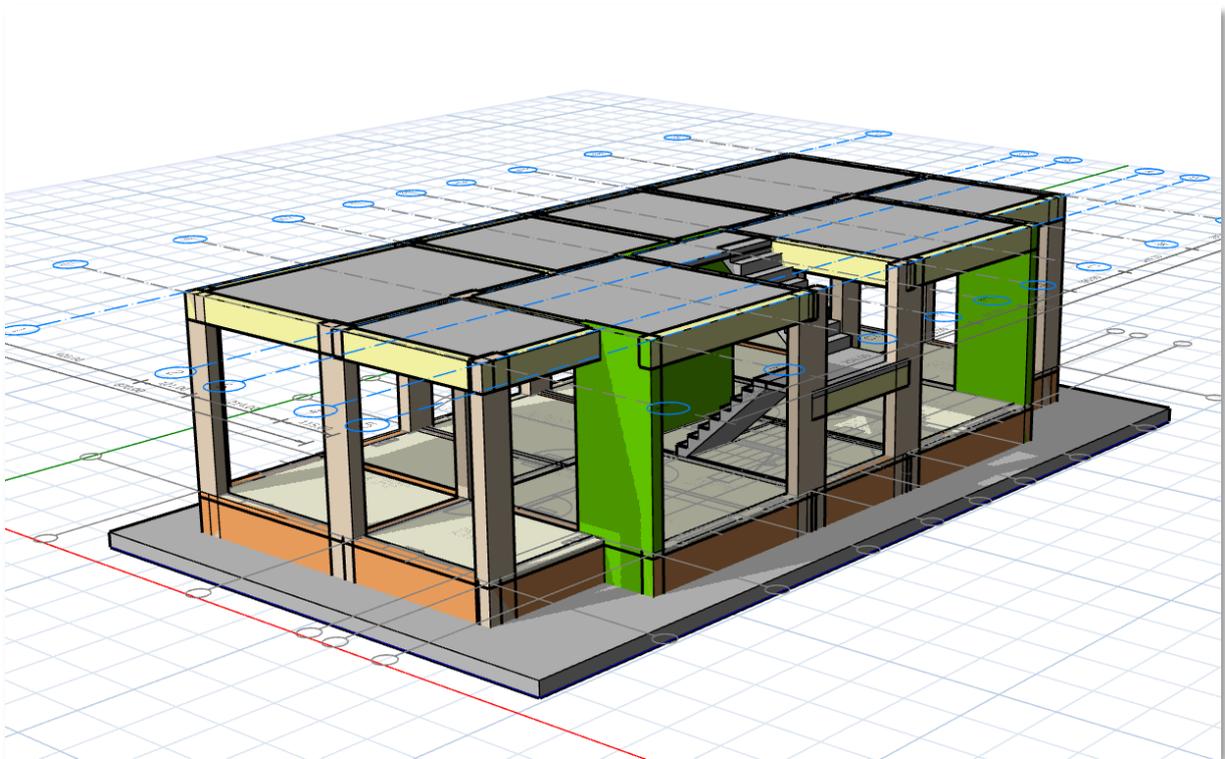

Please refer to our new design guide on Subbasement Walls and Slabs for detailed explanations, modeling tips and more:

**ProtaStructure Design Guide – Subbasement Members**






## New Foundation Pedestals

ProtaStructure 2026 introduces a powerful new feature that simplifies the design and analysis of concrete pedestals under steel columns. Users can seamlessly insert pedestals, define their dimensions effortlessly, and integrate them into structural models for optimal design workflows. When a base plate is specified beneath the steel column, the system automatically detects the presence of the pedestal, enabling accurate anchor design and ensuring consistency with structural requirements. Moreover, the column design menu facilitates the design of longitudinal reinforcement and links, streamlining the detailing process further. For users employing merged foundation models or finite element (FE) foundation analysis, pedestals are modeled as finite element frame members, ensuring precise structural representation. This enhancement improves both the efficiency and accuracy of foundation modeling, making it an essential addition to the advanced capabilities of ProtaStructure 2026.

Previously, users had to rely on more manual and less integrated methods for modeling and designing concrete pedestals under steel columns, which could lead to additional effort and potential inconsistencies. Anchor design, reinforcement detailing, and integration with base plates were not automated or seamlessly linked within the workflow.

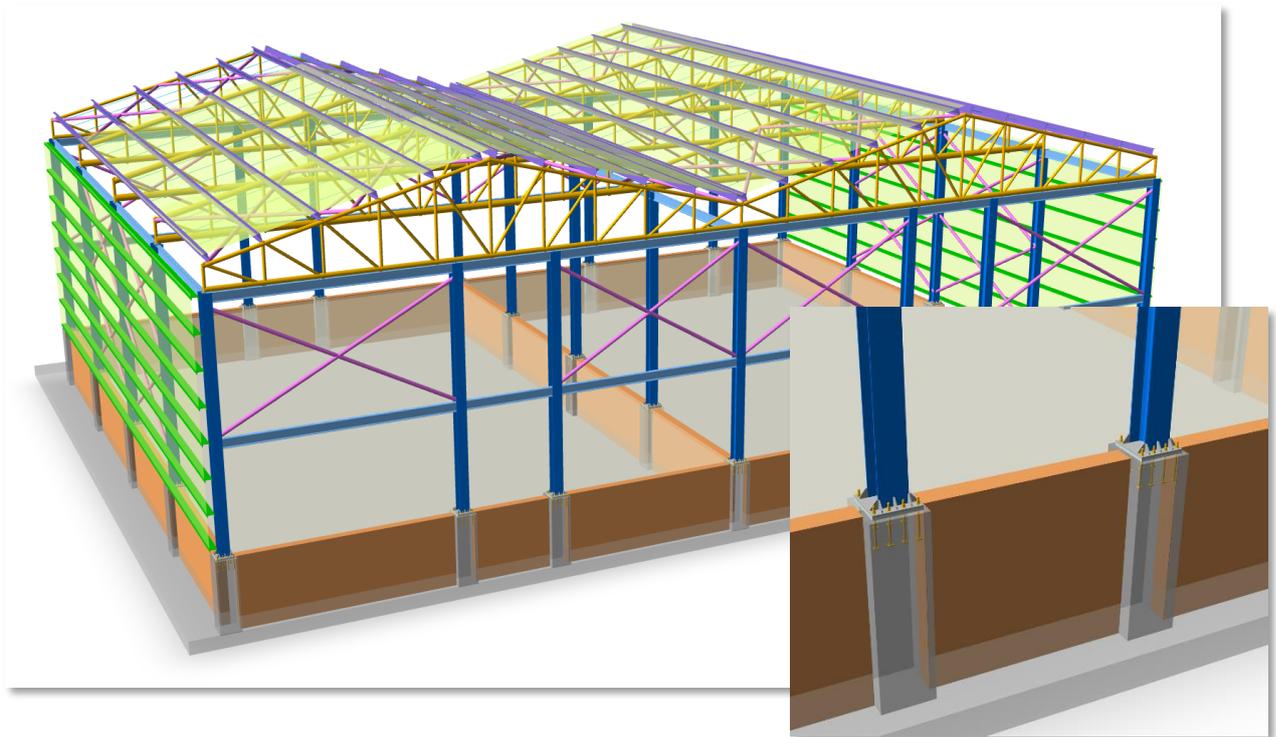

Please refer to our new design guide on Pedestal Modeling and Design for detailed explanations, modeling tips and more:

**ProtaStructure Design Guide – RC Pedestals**




# Multiple User-Defined Spectra in All Directions

ProtaStructure automatically calculates the elastic and design acceleration spectra according to international seismic codes, using a highly parametric UI that encapsulates the code-specific parameters in a user-friendly manner, enabling users to customize them to fulfill their project requirements.

In addition to this, ProtaStructure also allows user-defined acceleration spectra to be used in cases where a site-specific survey is required for specific site conditions.

ProtaStructure 2026 introduces a powerful new feature, allowing engineers to import as many user-defined acceleration spectra functions as they want and assign different spectrum curves in the X, Y, and Z directions. With the new UI, ProtaStructure 2026 offers a more clear visualization, spectrum comparison and easier import/export functionalities.

This enhancement provides greater flexibility and precision in seismic analysis, enabling our users to tailor their designs to specific project requirements and regional seismic conditions.

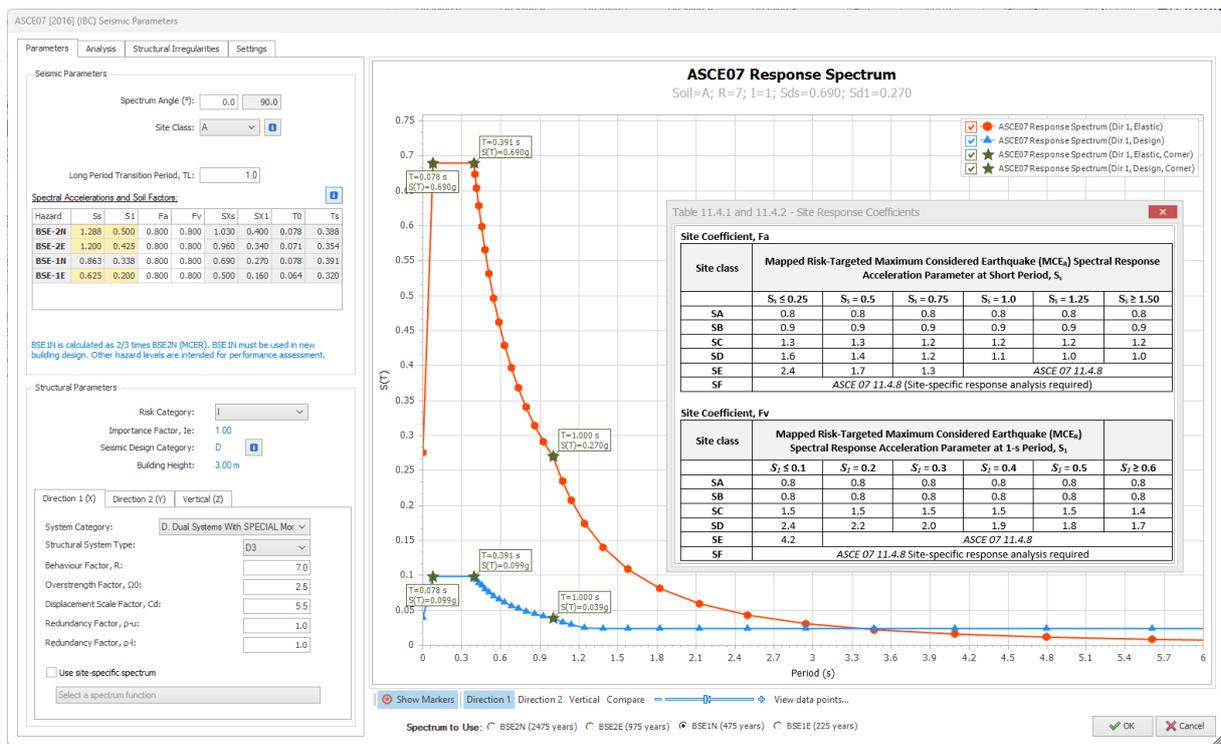

Please refer to our new design guide on User-Defined Spectra for detailed explanations and more:  
**ProtaStructure Design Guide – User Defined Spectra**




# Extended Code Support and Design



## Performance Assessment and Retrofit to ASCE/SEI 41-17

ProtaStructure provides a unique and powerful workflow for performance assessment and retrofit of buildings backed by nonlinear single-mode pushover, multi-mode pushover and nonlinear time-history analyses with a fully detailed member-by-member assessment report. This entire arsenal of powerful features is now fully compatible with **ASCE/SEI 41-17** procedures and seismic hazard levels such as **BSE-2N, BSE-2E, BSE-1N, BSE-1E**.

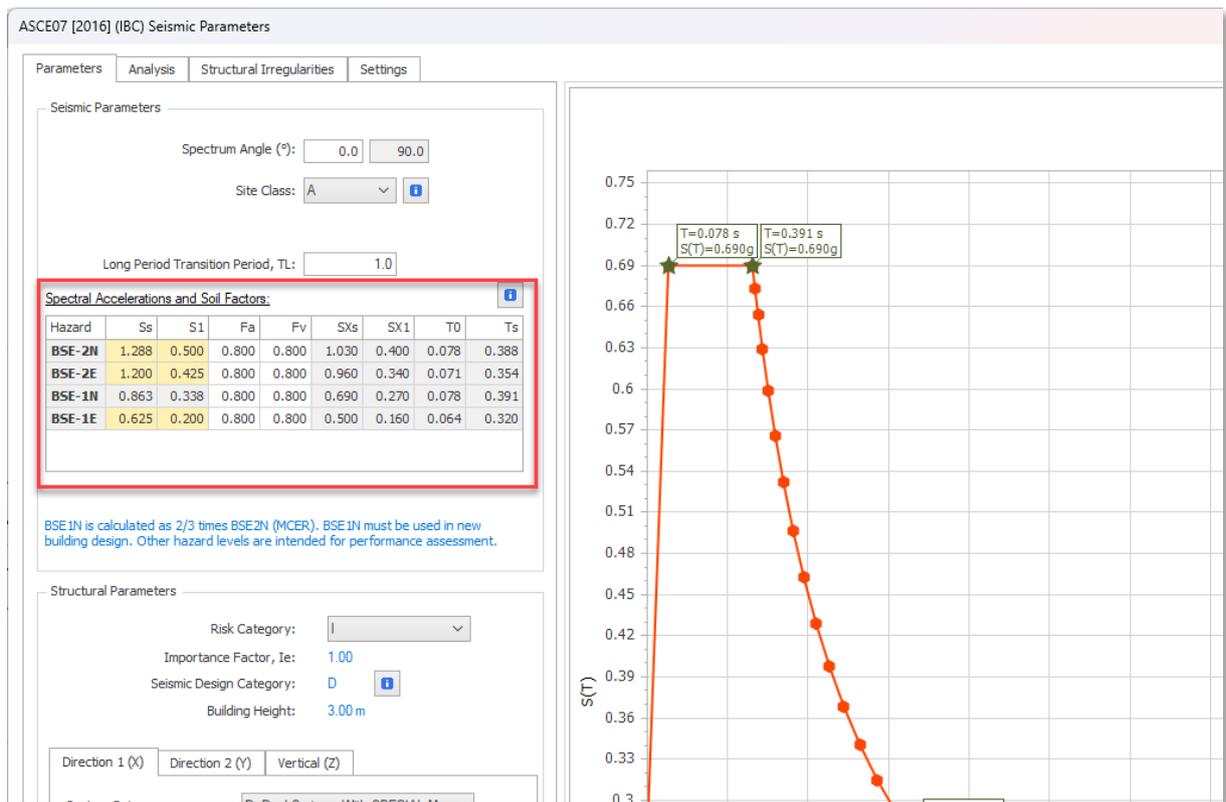

Please refer to our new design guide on building assessment according to ASCE/SEI-17 detailed explanations and more:

**ProtaStructure Design Guide – Assessment to ASCE/SEI 41-17**



## Performance Assessment and Retrofit to Eurocode 8-Part 3

ProtaStructure provides a unique and powerful workflow for performance assessment and retrofit of buildings backed by nonlinear single-mode pushover, multi-mode pushover and nonlinear time-history analyses with a fully detailed member-by-member assessment report. This entire arsenal of powerful features is now fully compatible with **Eurocode 8-Part 3 (EN 1998-3:2005)** procedures including nonlinear analyses and q-factor approach.

Please refer to our new design guide on building assessment according to ASCE/SEI-17 detailed explanations and more:

**ProtaStructure Design Guide – Assessment to Eurocode 8 – Part 3**


### Note:

This is a work in progress and still under testing. It is slightly behind schedule. We are planning to complete it shortly after the release. That's why we chose to include this feature in this document. We are also aiming to provide a design guide on this subject. Please stay tuned.



# Brazilian Codes (NBR) Support- Load Combinations and Steel Design

ProtaStructure 2026 now includes support for the NBR-8681 loading code and the NBR-8800 steel design code, enhancing its local code compliance capabilities. This addition ensures that engineers can seamlessly integrate these Brazilian standards into their projects, providing accurate and reliable structural designs. By incorporating these codes, ProtaStructure 2026 empowers users to meet regional requirements with greater precision and efficiency, ultimately delivering optimized and compliant engineering solutions.

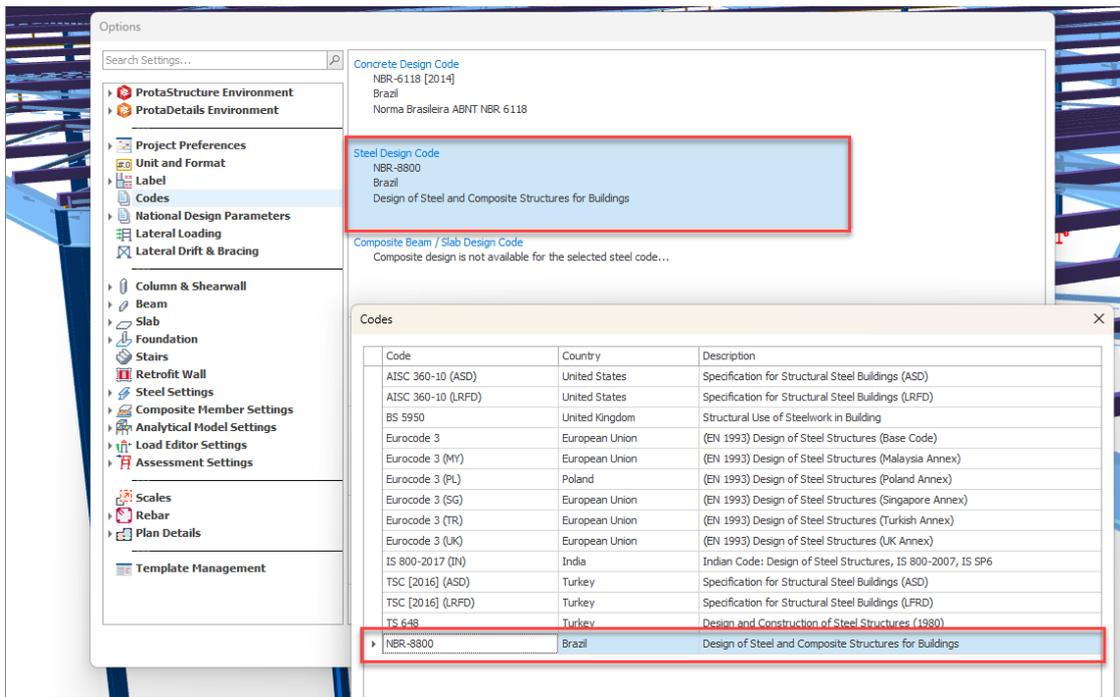


Load Combination Editor

ID	Label	LL Red	VOM	T...	Load Combinations
1	1.4D	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		1.4D
3	1.25D+1.5LL	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		1.25D + 1.5LL
5	1.25D+1.5Lc	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		1.25D + 1.5Lc
55	1.2D+LL+1.6Wx	<input type="checkbox"/>	<input type="checkbox"/>		1.2D + LL + 1.6Wx
56	1.2D+LL+1.6W-x	<input type="checkbox"/>	<input type="checkbox"/>		1.2D + LL + 1.6W-x
57	1.2D+LL+1.6Wy	<input type="checkbox"/>	<input type="checkbox"/>		1.2D + LL + 1.6Wy
58	1.2D+LL+1.6W-y	<input type="checkbox"/>	<input type="checkbox"/>		1.2D + LL + 1.6W-y
59	D	<input checked="" type="checkbox"/>	<input type="checkbox"/>		D
27	1.1D+1.2LL+Ex++0.3Ey-	<input type="checkbox"/>	<input type="checkbox"/>		1.1D + 1.2LL + Ex+ + 0.3Ey-
28	1.1D+1.2LL-Ex++0.3Ey-	<input type="checkbox"/>	<input type="checkbox"/>		1.1D + 1.2LL - Ex+ - 0.3Ey-
29	1.1D+1.2LL+Ex++0.3Ey+	<input type="checkbox"/>	<input type="checkbox"/>		1.1D + 1.2LL + Ex+ + 0.3Ey+
30	1.1D+1.2LL-Ex--0.3Ey+	<input type="checkbox"/>	<input type="checkbox"/>		1.1D + 1.2LL - Ex- - 0.3Ey+
31	1.1D+1.2LL+0.3Ex-+Ey+	<input type="checkbox"/>	<input type="checkbox"/>		1.1D + 1.2LL + 0.3Ex- + Ey+
32	1.1D+1.2LL-0.3Ex-Ey+	<input type="checkbox"/>	<input type="checkbox"/>		1.1D + 1.2LL - 0.3Ex- - Ey+
33	1.1D+1.2LL+0.3Ex++Ey-	<input type="checkbox"/>	<input type="checkbox"/>		1.1D + 1.2LL + 0.3Ex+ + Ey-
34	1.1D+1.2LL-0.3Ex-Ey-	<input type="checkbox"/>	<input type="checkbox"/>		1.1D + 1.2LL - 0.3Ex+ - Ey-
35	D+1.2LL+Ex++0.3Ey-	<input type="checkbox"/>	<input type="checkbox"/>		D + 1.2LL + Ex+ + 0.3Ey-
36	D+1.2LL-Ex++0.3Ey-	<input type="checkbox"/>	<input type="checkbox"/>		D + 1.2LL - Ex+ - 0.3Ey-
37	D+1.2LL+Ex-+0.3Ey+	<input type="checkbox"/>	<input type="checkbox"/>		D + 1.2LL + Ex- + 0.3Ey+
38	D+1.2LL-Ex--0.3Ey+	<input type="checkbox"/>	<input type="checkbox"/>		D + 1.2LL - Ex- - 0.3Ey+
39	D+1.2LL+0.3Ex-+Ey+	<input type="checkbox"/>	<input type="checkbox"/>		D + 1.2LL + 0.3Ex- + Ey+
40	D+1.2LL-0.3Ex-Ey+	<input type="checkbox"/>	<input type="checkbox"/>		D + 1.2LL - 0.3Ex- - Ey+
41	D+1.2LL+0.3Ex++Ey-	<input type="checkbox"/>	<input type="checkbox"/>		D + 1.2LL + 0.3Ex+ + Ey-
42	D+1.2LL-0.3Ex-Ey-	<input type="checkbox"/>	<input type="checkbox"/>		D + 1.2LL - 0.3Ex+ - Ey-

## Eurocode Nationally Determined Parameters (NDP) Editor

ProtaStructure 2026 introduces a powerful Nationally Dependent Parameters Editor, enabling users to seamlessly customize Eurocode parameters to align with their national standards. This innovative feature offers unparalleled flexibility, ensuring that engineers can adapt their designs to meet specific regional requirements with ease and precision. By supporting diverse national standards, ProtaStructure 2026 empowers engineers to deliver compliant and optimized structural solutions across various projects. The NDP Editor can be accessed via **Options > Nationally Determined Parameters**.

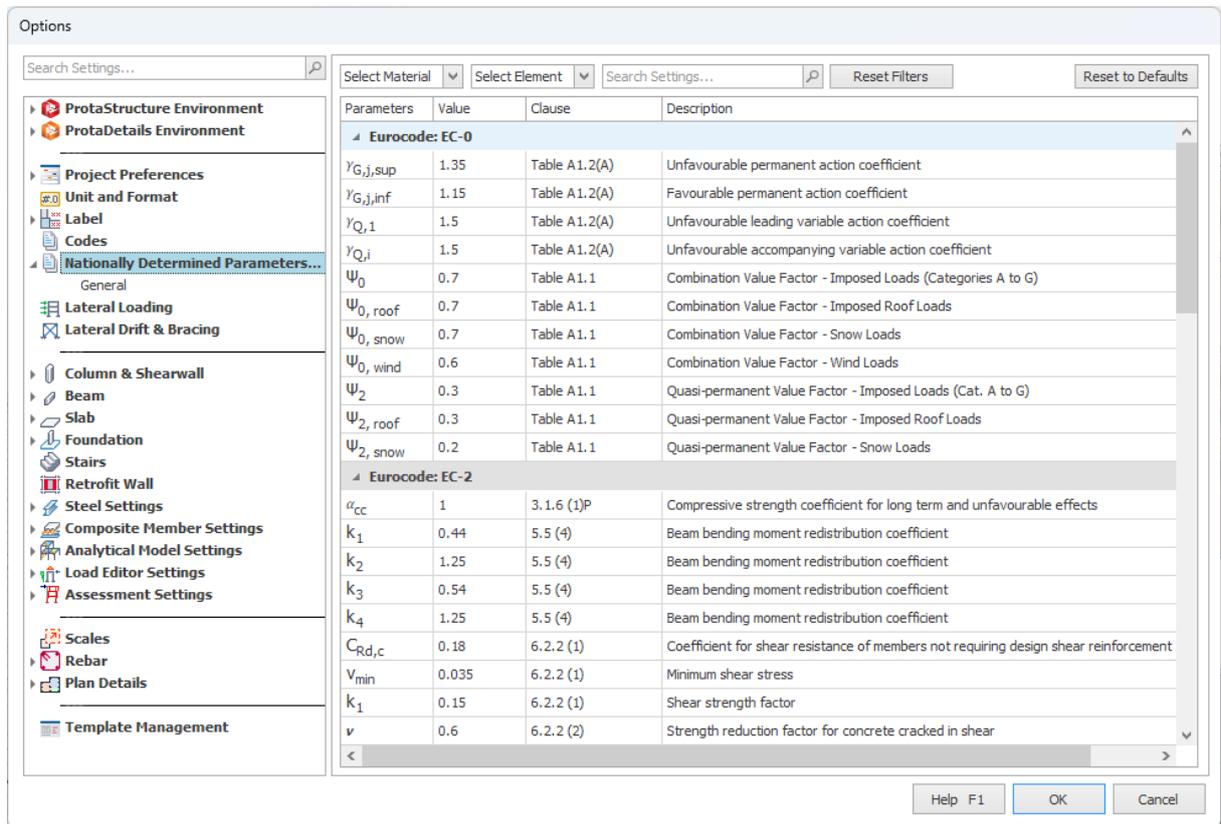

### Search and Filter

The brand-new NDP editor provides a handy search and filter functionality where you can narrow down the parameters according to material, designed element or any related keyword. By default, the NDP editor is grouped under supported code categories such as Eurocode 2, Eurocode 3, Eurocode 4 and Eurocode 8.

### Re-use The Parameters in Your Other Projects

Nationally Determined Parameters that you customize are saved as a part of the current project. You can also create a new template with these parameters so that you can use them for your other projects.



# Eurocode 8 Seismic Design for Steel and Concrete Members

The brand-new ProtaStructure 2026 now includes more comprehensive support for seismic design checks for **steel** and **concrete** buildings, following Eurocode 8 provisions, with step-by-step detailed reports.

### Seismic Checks

#### Moment Seismic Checks (1B19)

Moments Values Obtained From Analysis

Description	Left (kN.m)	Span (kN.m)	Right (kN.m)
	M <sub>L</sub>	M <sub>S</sub>	M <sub>R</sub>
Negative Moment (-)	15.7	3.5	17.0
Positive Moment (+)	6.9	6.9	5.9

Moment Check at Left Support:  $M_{L(-)} = 7.8 > M_{L(+)} / 2 = 7.8 \text{ kN.m}$  ✓ EC8 5.4.3.1.2(4)  
 Moment Check at Right Support:  $M_{R(-)} = 8.5 > M_{R(+)} / 2 = 8.5 \text{ kN.m}$  ✓ EC8 5.4.3.1.2(4)

Maximum Moment at Ends:  $M_{max, ends} = 17.0 \text{ kN.m}$

Maximum Moment Check at Left Support:  $M_{L(-)} = 7.8 > M_{max, ends} / 4 = 4.2 \text{ kN.m}$  ✓ EC8 5.5.3.1.3(5)  
 $M_{L(+)} = 15.7 > M_{max, ends} / 4 = 4.2 \text{ kN.m}$  ✓ EC8 5.5.3.1.3(5)

Maximum Moment Check at Span:  $M_{S(-)} = 6.9 > M_{max, ends} / 4 = 4.2 \text{ kN.m}$  ✓ EC8 5.5.3.1.3(5)  
 $M_{S(+)} = 4.2 > M_{max, ends} / 4 = 4.2 \text{ kN.m}$  ✓ EC8 5.5.3.1.3(5)

Maximum Moment Check at Right Support:  $M_{R(-)} = 8.5 > M_{max, ends} / 4 = 4.2 \text{ kN.m}$  ✓ EC8 5.5.3.1.3(5)  
 $M_{R(+)} = 17.0 > M_{max, ends} / 4 = 4.2 \text{ kN.m}$  ✓ EC8 5.5.3.1.3(5)

Moments Results Modified For Seismic

Description	Left (kN.m)	Span (kN.m)	Right (kN.m)
	M <sub>Ls</sub>	M <sub>Ss</sub>	M <sub>Rs</sub>
Negative Moment Capacity (-)	15.7	4.2	17.0
Positive Moment Capacity (+)	7.8	6.9	8.5

#### Capacity Shear Design Force Calculations (1B19)

Description	Left (kN.m)	Right (kN.m)
	M <sub>Ls</sub>	M <sub>Rs</sub>
Negative Probable Moment Capacity (-)	77.0	148.1
Positive Probable Moment Capacity (+)	77.0	77.1

System Type: DCH - EC8 5.4.2.2(1)P

Clear Span Length:  $L_n = 4.600 \text{ m}$

Overstrength Factor:  $\gamma_{ov} = 1.20$

Capacity Shear Force for Left End:  $V_{hd} = (M_{Ls(-)} + M_{Ls(+)}) / L_n = 40.2 \text{ kN}$

Capacity Shear Force for Right End:  $V_{hd} = (M_{Rs(-)} + M_{Rs(+)}) / L_n = 58.7 \text{ kN}$

Maximum Shear Force from Vertical Load Combinations Left End:  $V_{1d} + v_{1d} = 15.6 \text{ kN}$

Maximum Shear Force from Vertical Load Combinations Right End:  $V_{1d} + v_{1d} = 15.6 \text{ kN}$

Design Shear Force Left End:  $40.2 + 15.6 = 55.8 \text{ kN}$

Design Shear Force Right End:  $58.7 + 15.6 = 74.4 \text{ kN}$

### Shear Design Details

Ductility Level: DCH

Cross-Section Dimension Check:  $b_w = 250.0 \text{ mm} \geq 250.0 \text{ mm}$  ✓ (EC-8, 5.5.1.2.2)

Critical Region Length:  $l_{cr} \geq \max(h_w, l_w/9, 0.8 \text{ m}) = 1.125 \text{ m}$  (EC-8, 5.5.3.2.2 (4))

Minimum Link Diameter:  $d_{min} \geq (5 \text{ mm}, d_w/4), d_{min} = 8 \text{ mm}$  ✓ (EC-2, 9.5.3 (1))

Maximum Link Spacing:  $s_{l,max} \leq (400 \text{ mm}, b_w, h_w, 20d_w), 150 \leq 250 \text{ mm}$  ✓ (EC-2, 9.5.3 (3))

Critical Region Spacing:  $s_{l,max} \leq 0.6 * (125 \text{ mm}, b_w/3, 6d_w), 50 \leq 83 \text{ mm}$  ✓ (EC-2, 5.5.3.2.2 (12))

Axial Load Ratio Limit:  $V_{hd} = N_{Ed} / A_{c,comp} \leq 0.55, 0.47 \leq 0.55$  ✓ (EC-8, 5.5.3.2.1)

Maximum Shear Resistance:  $V_{Rd,max} = \alpha_{cw} b_w z v_{Rd} (\cot \theta + \tan \theta)$  (EC-2, 6.2.3)

$v_1 = 0.54$

$\cot \theta = 1$

$\theta = 0.380481776934764$

$V_{Rd,max} = 509.3 \text{ kN}$

Shear Resistance:  $V_{Rd,s} = A_{sw} f_{yk} \cot \theta = 619.6 \text{ kN}$  (EC-2, 6.2.3)

### Strong Column Checks

Eurocode 8 (EN 1998) Design of Structures for Earthquake Resistance (Base Code)  
 Eurocode 2 (UK) (EN 1992) Design of Concrete Structures (UK Annex)

N (kN) Axial Load that minimizes the moment capacity  
 N<sub>u</sub> (kN) Axial load under combination of vertical and earthquake loads  
 M<sub>Ed</sub>(+) (kN.m) Ultimate moment for positive earthquake direction  
 M<sub>Ed</sub>(-) (kN.m) Ultimate moment for negative earthquake direction  
 V (kN) Member Shear Force along frame local axis  
 V<sub>Ed</sub> (kN) Member Shear Force along respective earthquake direction  
 V<sub>Ed</sub> (kN) Total shear force of columns that satisfy strong column checks  
 V<sub>k</sub> (kN) Total Base Shear at the storey (along respective earthquake direction)

M<sub>Ed</sub> / M<sub>Ed</sub> = EC8 (4.4.2.3)

#### X-Direction

Joint	Member	Section (mm)	Moment Capacity, M <sub>Ed</sub> (+) (kN.m)	Moment Capacity, M <sub>Ed</sub> (-) (kN.m)
2C5	2C5 - Storey2	600/300	170.9	170.9
	1B6 + 1B5	1C5 - Storey1	600/300	174.2
1C5	1B6	250/500	148.1	77.1
	1B5	250/500	77.1	148.1

M<sub>Ed</sub> / M<sub>Ed</sub> = 345.1 kN.m / 225.2 kN.m = 1.5 > 1.3 **Sufficient** ✓

#### Y-Direction

Joint	Member	Section (mm)	Moment Capacity, M <sub>Ed</sub> (+) (kN.m)	Moment Capacity, M <sub>Ed</sub> (-) (kN.m)
2C5	2C5 - Storey2	600/300	78.9	78.9
	+ 1B13	1C5 - Storey1	600/300	80.4
1C5	1B6	250/500	77.0	77.0
	1B13	250/500	77.0	77.0

M<sub>Ed</sub> / M<sub>Ed</sub> = 159.4 kN.m / 77.0 kN.m = 2.1 > 1.3 **Sufficient** ✓

### Column-Beam Joint Shear Report

Eurocode 8 (EN 1998) Design of Structures for Earthquake Resistance (Base Code)  
 Eurocode 2 (UK) (EN 1992) Design of Concrete Structures (UK Annex)

V<sub>hd</sub> Horizontal shear force acting on the concrete core of the joints  
 V<sub>Ed</sub> The shear force in the column above the joint, from the analysis in the seismic design situation  
 V<sub>Ed</sub> The shear force in the column below the joint, from the analysis in the seismic design situation  
 b<sub>w</sub> Thickness of confined parts of a wall section, or width of the web of a beam  
 b<sub>j</sub> The effective joint width  
 A<sub>sw</sub> The area of the beam top reinforcement  
 A<sub>sw</sub> The area of the beam top reinforcement

$V_{hd} = \gamma_{ov} F_{Ed} / A_{sw} + A_{sw} - V_{Ed}$  EC 8 (5.2.2)  
 $V_{hd} = N_{Ed} / (a_w b)$  EC 8 (5.5.3.3) (3)  
 $\eta = 0.6 (1 - f_{yk} / 250)$  EC 8 (5.5.3.3)  
 $V_{hd,max} = \eta f_{yk} (1 - v_w / \eta)^{1/2} b_j h_c$  (Confined) EC 8 (5.3.3)  
 $V_{hd,max} = 0.8 \eta f_{yk} (1 - v_w / \eta)^{1/2} b_j h_c$  (Unconfined) EC 8 (5.5.3.3) (2) b

#### X Direction Checks

Joint	Confined	Member	b <sub>j</sub> (mm)	h (mm)	V <sub>Ed</sub> / V <sub>Rd</sub> (kN)	V <sub>Ed</sub> (kN)	A <sub>sw,Top</sub> (mm <sup>2</sup> )	A <sub>sw,Bot</sub> (mm <sup>2</sup> )	η	v <sub>w</sub>	V <sub>Ed</sub> (kN)	V <sub>Ed,max</sub> (kN)
2C5	No	2C5 - Storey2	300.0	600.0	6.1	6.1	-	-	-	-	212.4	1215.8
	No	1B13	300.0	600.0	9.7	6.1	-	-	0.54	0.1	212.4	1215.8
1C5	-	1B13	-	-	-	-	402.12	402.12	-	-	-	-

Joint Shear Force, V<sub>hd</sub> = 212.4 kN < 1215.8 kN ✓

#### Y Direction Checks

Joint	Confined	Member	b <sub>j</sub> (mm)	h (mm)	V <sub>Ed</sub> / V <sub>Rd</sub> (kN)	V <sub>Ed</sub> (kN)	A <sub>sw,Top</sub> (mm <sup>2</sup> )	A <sub>sw,Bot</sub> (mm <sup>2</sup> )	η	v <sub>w</sub>	V <sub>Ed</sub> (kN)	V <sub>Ed,max</sub> (kN)
2C5	No	2C5 - Storey2	400.0	300.0	6.7	2.0	-	-	-	-	435.1	810.6
	No	1C5 - Storey1	400.0	300.0	2.0	2.0	-	-	0.54	0.1	435.1	810.6
1B6	-	1B6	-	-	-	-	402.12	402.12	-	-	-	-
	-	1B5	-	-	-	-	402.12	402.12	-	-	-	-

Joint Shear Force, V<sub>hd</sub> = 435.1 kN < 810.6 kN ✓

# Eurocode 8 Torsional Irregularity Check using Torsional Radius

ProtaStructure already includes the “Relative Drift” method for detecting torsional irregularity even for the complex floor plans and structural systems where the Eurocode “Torsional Radius” approach may not be valid. With ProtaStructure 2026, we have optionally introduced the torsional radius approach enabling users to perform the floor torsion check according to procedure outlined in Eurocode 8 Cl. 4.2.3.2 and relevant design guides.

You can activate the “Torsional Radius” method by enabling the “**Torsionally Flexible Plan: Detect Automatically Based on Torsional Radius**” option in **Seismic Parameters > Structural Irregularities** window. By default, the “Lateral Drift” approach is used, which includes the 3D behavior and stiffness of the structure.

**Important:**

Torsional Radius Method makes use of the Center of Rigidity coordinates, which is ‘approximately’ calculated using column and wall EI values. Center of rigidity is used for display purposes in ProtaStructure and is not normally used in any calculations.

According to Eurocode, determining Torsional Radius using center of rigidity is valid for homogenous structural systems. This method is introduced in the software to provide an alternative to lateral drift method, and it must be used cautiously, considering the structural system of the structure.

**TORSION FLEXIBILITY CHECK:**

(EN 1998-1 - Cl. 4.2.3.2)

$I_{xx}$  : Moment of Inertia About Global X-Axis  
 $I_{yy}$  : Moment of Inertia About Global Y-Axis  
 $\Sigma m$  : Storey Mass  
 $\Sigma mr^2$  : Mass Moment of Inertia of the Storey  
 $x_{cs}$  :  $\Sigma x EI_{xx} / \Sigma EI_{xx}$  (Rigidity Center Coordinates based on column and wall inertia)  
 $y_{cs}$  :  $\Sigma y EI_{yy} / \Sigma EI_{yy}$   
 $r_x$  :  $\sqrt{\{ \Sigma (x^2 EI_{xx} + y^2 EI_{yy}) / \Sigma EI_{xx} \}}$  (Torsion Radius)  
 $r_y$  :  $\sqrt{\{ \Sigma (x^2 EI_{xx} + y^2 EI_{yy}) / \Sigma EI_{yy} \}}$   
 $I_s$  :  $\sqrt{\{ \Sigma mr^2 / \Sigma m \}}$

Storey	$\Sigma EI_{xx}$ Column / Wall (kN/m <sup>2</sup> m <sup>4</sup> )	$\Sigma EI_{xx}$ Total (kN/m <sup>2</sup> m <sup>4</sup> )	$\Sigma EI_{yy}$ Column / Wall (kN/m <sup>2</sup> m <sup>4</sup> )	$\Sigma EI_{yy}$ Total (kN/m <sup>2</sup> m <sup>4</sup> )	$\Sigma x EI_{xx}$ Total (m kN/m <sup>2</sup> m <sup>4</sup> )	$\Sigma y EI_{yy}$ Total (m kN/m <sup>2</sup> m <sup>4</sup> )	$x_{cs}$ (m)	$y_{cs}$ (m)
1	60335.156 150837.89	754189.45	653630.86 1.222E+07	1.287E+07	1.653E+07	2.253E+08	21.9111	17.5033

Storey	$\Sigma m$ (t)	$\Sigma mr^2$ (t.m <sup>2</sup> )	$I_s$ (m)	$r_x$ (m)	$r_y$ (m)	$e_x$ (m)	$e_y$ (m)
1	170.56	7893.06	6.8028	13.0466 $\geq I_s$ ✓	3.1581 $< I_s$ ✗	0.9652 $\leq 0.3r_x$ ✓	0.2271 $\leq 0.3r_y$ ✓

Dir X: Torsional Flexibility does not Exist.  
 Dir Y: Building is Torsionally Flexible.

## Eurocode 8 Automated Prevailing Failure Mode Coefficient ( $k_w$ ) Calculation

The prevailing failure mode coefficient,  $k_w$ , in Eurocode 8 plays a crucial role in seismic design. It is used to adjust the behavior factor,  $q$ , which represents the reduction in seismic forces due to the nonlinear behavior of structures. The behavior factor is calculated as  $q = q_0 \cdot k_w$ , where  $q_0$  is the basic value of the behavior factor dependent on the structural system and its regularity in elevation.


The  $k_w$  factor reflects the prevailing failure mode in wall, wall-equivalent and torsionally flexible structural systems. It accounts for the influence of the failure mode on the energy dissipation capacity of the structure. For example, structures with ductile failure modes can dissipate more energy during seismic events, leading to higher  $k_w$  values. This adjustment ensures that the design accurately reflects the expected performance of the structure under seismic loads. Calculation of prevailing failure mode factors is given by equations 5.2 and 5.3

$$k_w = \begin{cases} 1,00 & \text{for frame and frame – equivalent systems} \\ 0.5 \leq \frac{(1 + \alpha_0)}{3} \leq 1, & \text{for wall, wall – equivalent and torsionally flexible systems} \end{cases}$$

$$\alpha_0 = \frac{\sum h_{wi}}{\sum l_{wi}}$$

To automatically calculate the prevailing mode coefficient in ProtaStructure:

1. Open **Seismic Parameters** window
2. Click the **Calculate** button next to the **Prevailing Failure Mode Coefficient ( $k_w$ )** field in Direction 1 or Direction 2.
3. Depending on the structural system, program will automatically calculate  $k_w$  and report the details on a small message box.

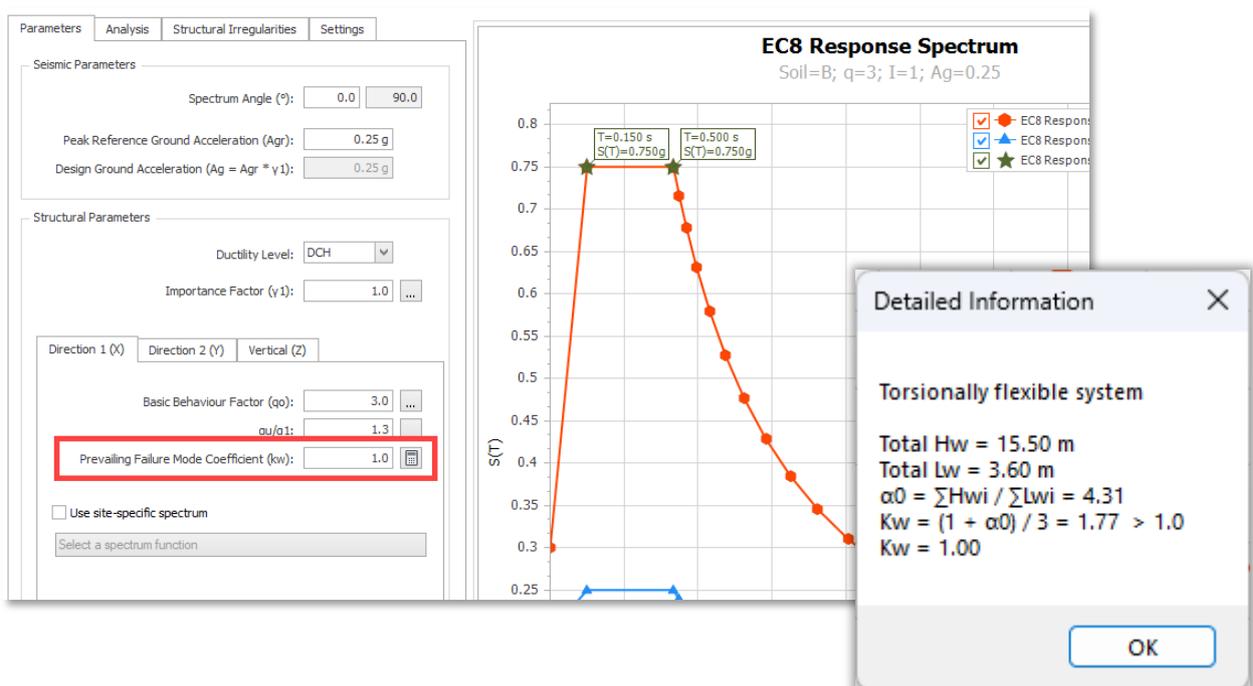




## Bending Moment Design Envelope

From the bending moment diagram obtained from the analysis, a linear envelope can be established.

This diagram must be shifted upwards by distance  $a_1$ , designated tension shift in Eurocode 8 - 5.4.2.4 (5), consistent with the strut inclination adopted in the Ultimate Limit State verification for shear.

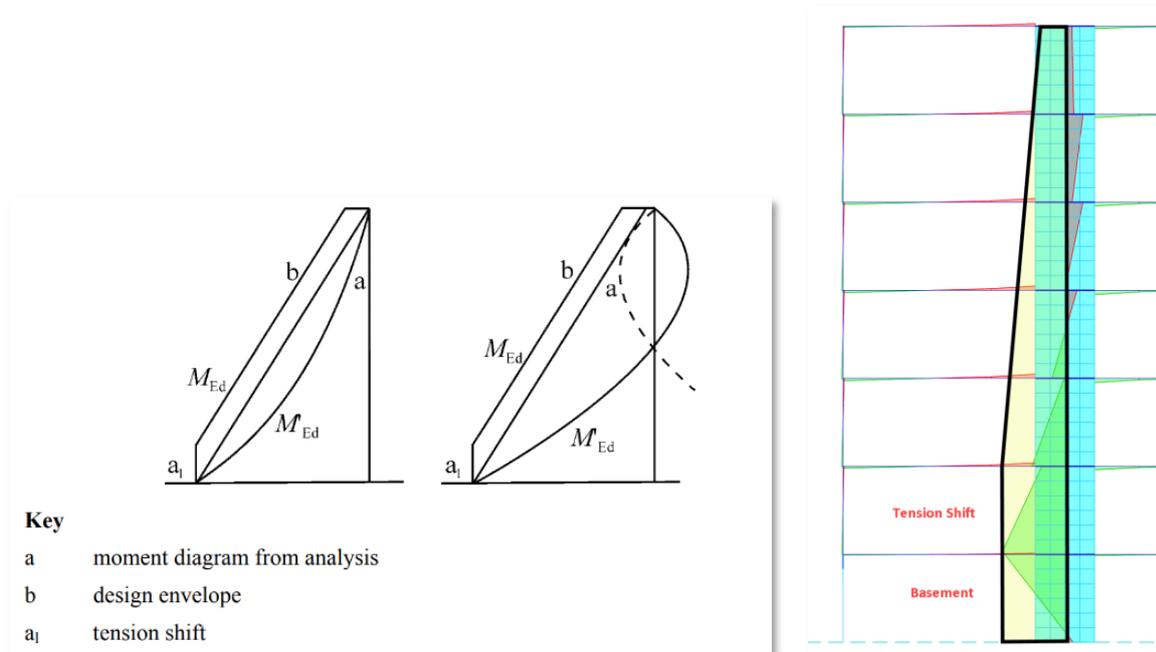


## User-defined Strut Inclination Angle ( $\theta$ ) for Tension Shift Length

The default **Strut Inclination Angle ( $\theta$ )** for tension shift calculation in ProtaStructure is  $21.8^\circ$ , which yields  $\cot(\theta) = 2.5$ .

The tension shift length is calculated with the formula  $a_1 = L_w \cot(\theta)$ .

The value of strut inclination angle varies from 21.8 to 45 degrees. To leave room for individual interpretation, we have introduced a new setting, “**Strut Inclination Angle for Design Envelope Tension Shift**”. It is accessible from **Settings > Column & Shearwall > Design**.

The value entered here will override the calculated strut inclination angle. When left zero, the tension shift length is calculated using the default  $\cot(\theta) = 2.5$ .

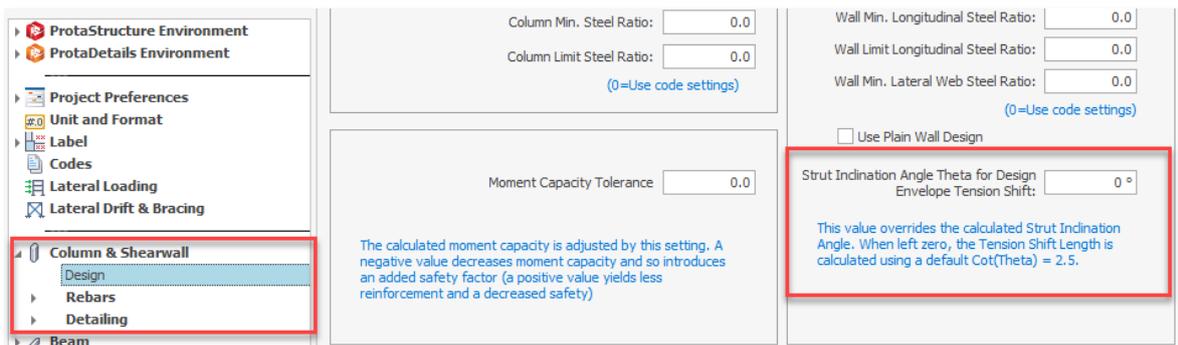


## Shear Design Envelope

According to **Eurocode 8 – 5.4.2.4 (6)**, the possible increase in shear forces after yielding at the base of a primary seismic wall, must be considered. This requirement may be satisfied if the design shear forces are increased by 50% (for DCM) than the analysis shear forces in the critical wall height extending  $H_w/3$  from the building base or basement level. For DCH structures, the shear amplification factor is calculated by **Eurocode 8 Eqn. 5.25**.

### User-Defined Shear Amplification factor, $\epsilon$

ProtaStructure provides a user-defined parameter for shear amplification factor which can be edited for each wall line. The default and the minimum value are **1.5** and the maximum value is the 'q' factor used in the analysis in the wall direction. ProtaStructure will magnify the analysis shear forces by this factor inside the critical height. The shear diagram is linearly connected to the value at the top, which is  $V_{wall,base}/2$ .

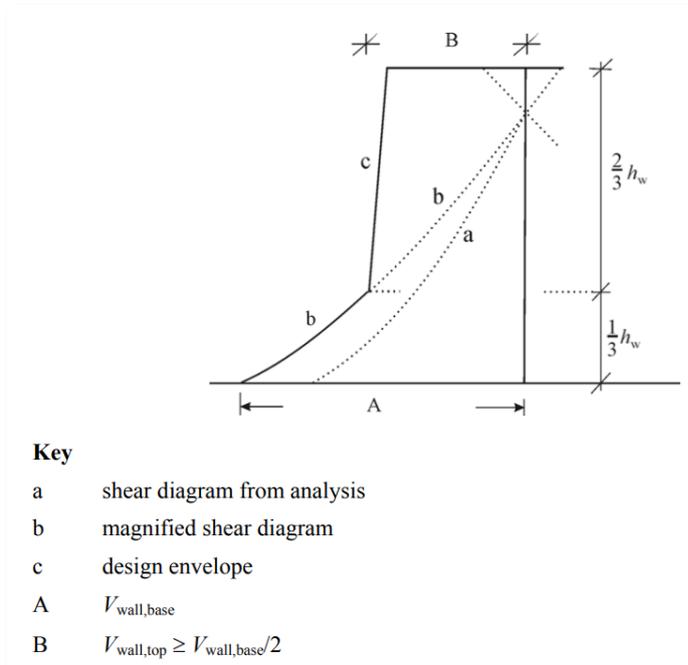

Wall Design Moment Envelopes

Column Line: A - 2 (1W1)      Shear Magnification Factor( $\epsilon$ ) 1.5      Load Case: 8 - Ex+ (Equiv. Static Seismic X (E+))

Storey	Wall	b1 (mm)	b2 (mm)	Wall Angle	Critical Wall	Ma-Bot (k N.m)	Md-Bot (k N.m)	Ma-Top (k N.m)	Md-Top (k N.m)	V1a-Bot (k N)	V1d-Bot (k N)	V1a-Top (k N)	V1d-Top (k N)
8	8W1	5250	250	0.00	<input type="checkbox"/>	-380.4	9237.5	-485.5	7428.6	-35	-1042.1	-35	-927.8
7	7W1	5250	250	0.00	<input type="checkbox"/>	99.8	11046.5	-953.9	9237.5	-351.2	-1156.5	-351.2	-1042.1
6	6W1	5250	250	0.00	<input type="checkbox"/>	1171.5	12855.4	-477.1	11046.5	-549.5	-1270.8	-549.5	-1156.5
5	5W1	5250	250	0.00	<input type="checkbox"/>	2788.2	13986	590.1	12855.4	-732.7	-1385.2	-732.7	-1270.8
4	4W1	5250	250	0.00	<input type="checkbox"/>	4897.3	13986	2229.4	13986	-889.3	-1499.5	-889.3	-1385.2
3	3W1	5250	250	0.00	<input type="checkbox"/>	7471.5	13986	4396.2	13986	-1025.1	-1537.7	-1025.1	-1537.7
2	2W1	5250	250	0.00	<input checked="" type="checkbox"/>	10514	13986	7074.2	13986	-1146.6	-1719.9	-1146.6	-1719.9
1	1W1	5250	250	0.00	<input checked="" type="checkbox"/>	13986	13986	10274.8	13986	-1237.1	-1855.6	-1237.1	-1855.6

## Modal Vertical Earthquake Analysis

This feature was a part of ProtaStructure 2025. It is recapped here for the sake of contextual relevance and completeness. Approximate static approach is not applicable for Eurocode, so the modal vertical earthquake analysis was implemented in ProtaStructure 2025 as a new feature. Feel free to skip this title if you are already familiar with this feature.


ProtaStructure can reflect the effects of vertical earthquake action in the design by providing two methods.

1. Approximate Static Approach
2. Modal Spectrum Analysis Method

### Approximate Static Approach

In the static approach, the result from gravity load case is multiplied with a fraction of horizontal spectral acceleration such as  $0.2S_{D5}$ . Vertical vibration modes and a dedicated vertical spectrum are not considered in this approach.

However, static vertical earthquake calculation may not be sufficient (or allowable by the code) for the buildings with transfer columns, beams or slabs covering large spans, long cantilevers or slanting columns.

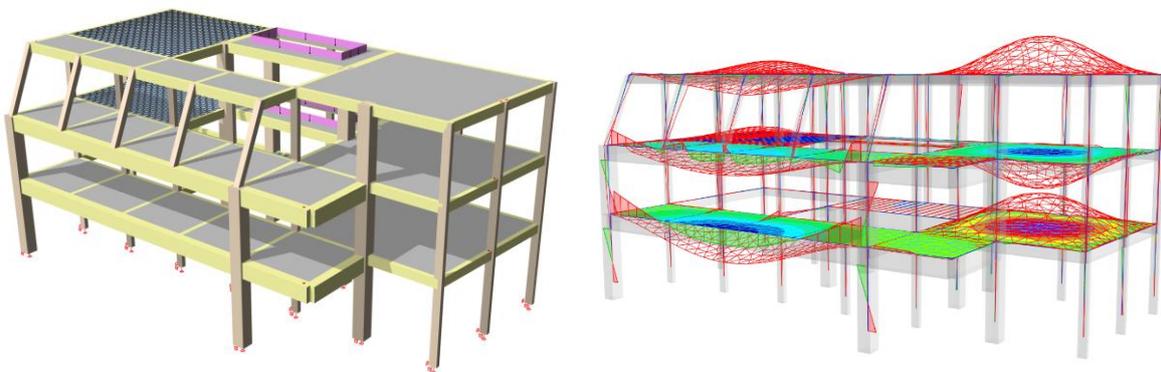

Certain seismic codes require the use of modal vertical earthquake analysis in these scenarios. For example, Eurocode only allows the use of modal vertical earthquake analysis.

### Modal Spectrum Analysis Method

In modal spectrum method, vertical vibration modes of the structure are considered together with a vertical acceleration spectrum. With ProtaStructure 2025, you are now able to perform modal vertical earthquake analyses.

Please refer to our new design guide on vertical earthquake analysis for detailed explanations, modeling tips and more:

**ProtaStructure Design Guide – Vertical Earthquake Effects**



# Customizable Eurocode Vertical Spectrum

Although it was originally introduced in ProtaStructure 2025, we have substantially improved the vertical earthquake elastic and design spectrum according to Eurocode 8. You can now display elastic and design spectrum at the same time and customize the parameters such as **behavior factors in vertical direction (q-vertical),  $a_{vg}/a_g$ , S,  $T_B$ ,  $T_C$  and  $T_D$**  independently from horizontal spectrum. This will allow you to adapt your design to your national requirements.

Параметрите  $a_{vg}/a_g$ , S,  $T_B$ ,  $T_C$  и  $T_D$ , определящи приетата форма на еластичния спектър на реагиране за вертикалната компонента на сеизмичното въздействие, са дадени в таблица NA.3.4 за спектри вид 1 и в таблица NA.3.4-1 за спектри вид 3:


**Таблица NA.3.4 - Приети стойности на параметрите, описващи еластичен спектър на реагиране за вертикалната компонента на спектър вид 1**

Спектър	$a_{vg} / a_g$	$T_B$ (s)	$T_C$ (s)	$T_D$ (s)
Вид 1	0,85	0,1	0,4	2,0

**Таблица NA.3.4-1 - Приети стойности на параметрите, описващи еластичен спектър на реагиране за вертикалната компонента на спектър вид 3 (Вранча) Type 3 (Vrancea)**


Спектър TYPE 3	$a_{vg} / a_g$	$T_B$ (s)	$T_C$ (s)	$T_D$ (s)
Вид 3	0,85	0,2	0,6	2,0

An excerpt from Bulgarian codes that overrides the vertical spectrum parameters.

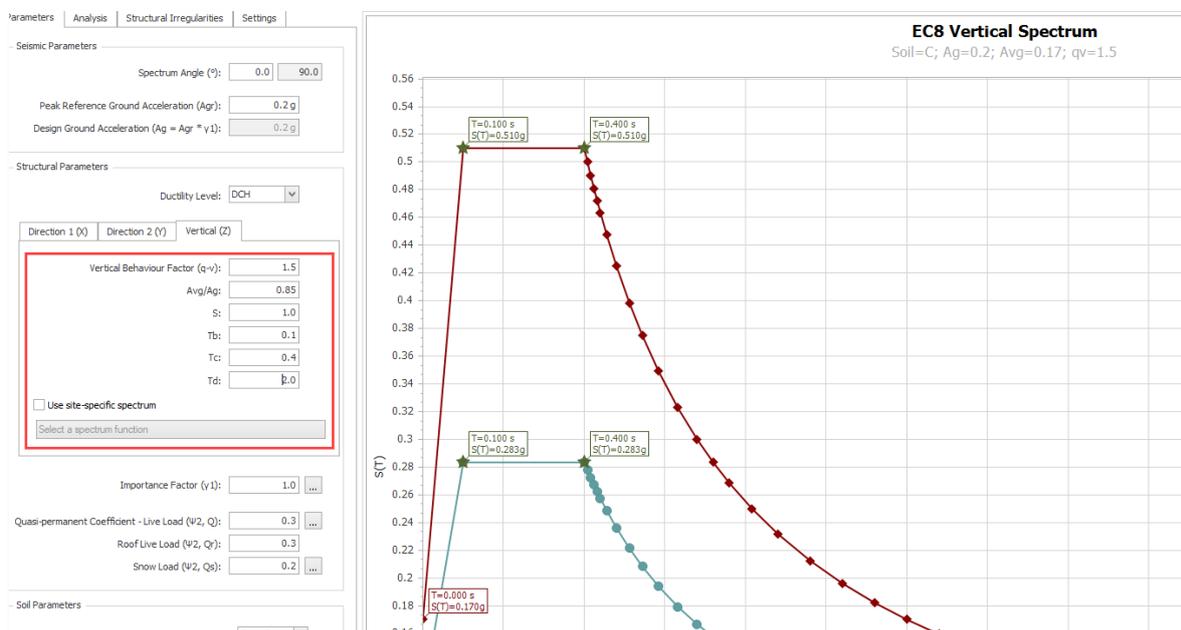

# Eurocode 8 Dual System Wall-Frame Interaction Checks

If your structural system is categorized as a Wall System, Frame System, Dual System, Frame-Equivalent Dual System, or Wall-Equivalent Dual System, as outlined in EN1998-1:2004 Clause 5.1.2, you can now assess the total shear contributions of frames and shear walls in your design. This allows you to make necessary adjustments and optimizations according to the specific structural system type. You can see the summary table in the **Post-Analysis Checks Report**.

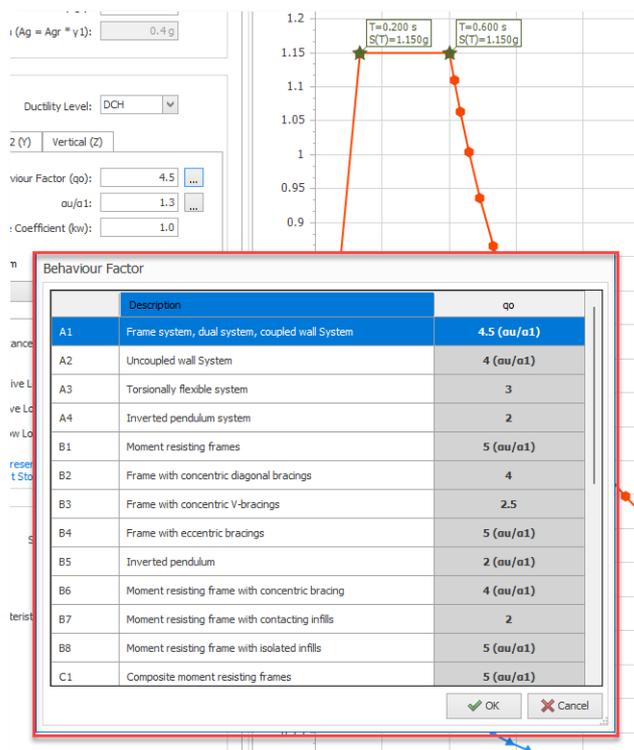

EARTHQUAKE DIRECTION: 2 (Angle From X 90.00 Deg)

Member	Angle	Ey+ (Equiv. Static Seismic Y (E+))			Ey- (Equiv. Static Seismic Y (E-))		
		V2 (kN)	V3 (kN)	Vproj (kN)	V2 (kN)	V3 (kN)	Vproj (kN)
1C1	0.00	6.25	-11.24	11.24	1.61	-11.54	11.54
1C2	0.00	6.25	-12.50	12.50	1.61	-11.85	11.85
1C3	0.00	4.86	-13.14	13.14	1.25	-11.70	11.70
1C5	0.00	-6.49	-12.50	12.50	-1.66	-11.86	11.86
1C6	0.00	-4.87	-13.14	13.14	-1.25	-11.69	11.69
1C7	0.00	-0.62	-34.78	34.78	-0.17	-39.14	39.14
1C8	0.00	0.59	-30.78	30.78	0.15	-34.64	34.64
1C9	0.00	0.63	-35.08	35.08	0.16	-36.03	36.03
1C10	0.00	0.84	-39.17	39.17	0.21	-37.17	37.17
1C11	0.00	-0.65	-36.53	36.53	-0.17	-37.52	37.52
1C12	0.00	-0.66	-39.18	39.18	-0.22	-37.18	37.18
1C13	0.00	4.87	-9.89	9.99	1.25	-11.24	11.24
1C14	0.00	-1.48	-29.05	29.05	-0.36	-32.69	32.69
1C15	0.00	-3.36	-12.78	12.78	-0.84	-13.12	13.12
1C16	0.00	-4.86	-11.33	11.33	-1.24	-11.64	11.64
Total:	(Columns)			<b>341.17</b>			<b>349.02</b>
1W3	0.00	49.84	-37.16	37.16	12.89	-33.23	(P) 33.23
1W4	0.00	-50.95	-37.15	37.15	-13.21	-33.23	(P) 33.23
Total:	(Shearwalls)			<b>74.31</b>			<b>66.46</b>
Total Base Shear:				<b>415.48</b>			<b>415.48</b>

Base Shear Ratio of Columns:  
 Ey+: 341.17 / 415.48 = 0.840  
 Ey-: 349.02 / 415.48 = 0.840

Base Shear Ratio of Walls:  
 Ey+: 74.31 / 415.48 = 0.180  
 Ey-: 66.46 / 415.48 = 0.160



# Eurocode 2 Long Term Deflection Checks Including Creep and Shrinkage

With ProtaStructure 2026, you can consider creep and shrinkage in deflection calculations by defining time-dependent material properties according to EN1992-1-1:2004 and CEB FIB 90. Serviceability requirements are automatically checked against obtained long-term deflections according to EC2.

**Note:**

Detailed deflection checks according to ACI318, IS456, NSR10-C, NSCP, NTE060 and SNI2847 were already introduced with the previous versions of ProtaStructure. ProtaStructure 2026 now supports the detailed RC deflection checks including long-term creep and shrinkage effects.

### Concrete Beam Deflection Check

Eurocode 2 (UK) (EN 1992) Design of Concrete Structures (1)

**2B24 - Storey: 2**

Flexural Member Type : Beam  
 Span Type : Exterior Span  
 Reference Reinforcement Ratio,  $\rho_r$  : 0.0050 (EC2 7.4.2(2))  
 Required Tension Reinforcement Ratio,  $\rho$  : 0.0050 (EC2 7.4.2(2))  
 Required Compression Reinforcement Ratio,  $\rho'$  : 0.0027 (EC2 7.4.2(2))  
 Structural System Factor, K : 1.30 (EC2 7.4.2(2), Table 7.4N)  
 Stress Level Factor : 1.16 (EC2 7.4.2(2))  
 Span Length Factor : 0.72 (EC2 7.4.2(2))  
 Flange Modification Factor : 0.80 (EC2 7.4.2(2))  
 Final Limit : 23.72  
 Clear Span / Height : 9750.0 / 700.0 mm = 13.9  $\leq$  23.72

Section Dimensions: 250.0 / 700.0 mm d = 647.0  
 Flange Dimensions: b = 1200.0 mm h = 120.0  
 Uncracked Section:  $I_{uc} = 0.013088 \text{ m}^4$  y(b) = 464  
 Concrete:  $f_{ck} = 25.00 \text{ N/mm}^2$   $\epsilon_{cu} = 33.0\%$   
 $E_{cm} = 31475.81 \text{ N/mm}^2$   $E_{cs,sp} = 50\%$   
 Steel:  $f_y = 500.00 \text{ N/mm}^2$   $E_s = 200000 \text{ N/mm}^2$   $t_b = 0 \text{ days}$   
 Time Dependent Parameters: Time Model = EN1992-1-1:2004  $2A_s/u = 500.00$  Cement Type = Class N  $\beta = 0.5$   
Relative Humidity = 40%  $\epsilon_{sh} = 4.194E-004$

Serviceability Limit	State Combination Results
G+Q	Service Moment, M : 83.2 kN.m
	Cracking Moment, $M_{cr}$ : 72.3 kN.m
	Cracked Inertia, $I_{cr}$ : 10807.3 kN.m <sup>4</sup>
	Distribution Coefficient, $\zeta = 1 - \beta(M_{cr}/M)^2$ (EC2 Eqn. (7.19)) : 0.52
	Uncracked Deflection, $\delta_{uc}$ : 0.021 m
	Cracked Deflection, $\delta_{cr}$ : 0.025 m
	Final Deflection, $\delta = \zeta \delta_{uc} + (1 - \zeta) \delta_{cr}$ (EC2 Eqn. (7.18)) : 0.024 m
	First Moment of Area of the Reinforcement for Uncracked Case, $S_{uc}$ : 5.025E-04 m <sup>3</sup>
	First Moment of Area of the Reinforcement for Cracked Case, $S_{cr}$ : 5.246E-04 m <sup>3</sup>
	Shrinkage Curvature for Uncracked Case, $(1/\epsilon_{sh})_{uc} = \epsilon_{sh} \alpha_s S_{uc} / I_{uc}$ (EC2 Eqn. (7.21)) : 6.42E-007 1/mm
	Shrinkage Curvature for Cracked Case, $(1/\epsilon_{sh})_{cr} = \epsilon_{sh} \alpha_s S_{cr} / I_{cr}$ (EC2 Eqn. (7.21)) : 8.12E-007 1/mm
	Shrinkage Deflection for Uncracked Case : 0.011 m
	Shrinkage Deflection for Cracked Case : 0.012 m
	Final Shrinkage Deflection (EC2 Eqn. (7.18)) : 0.012 m
	Total Deflection (Including Creep and Shrinkage) : 0.035 m
Deflection Check:	35.159 mm $\leq$ 39.000 mm (9750 / 250) ... <b>Adequate</b> ✓

Time Dependent Material Properties (C25/30,  $f_{cm28} = 25 \text{ MPa}$ ,  $f_{cm28} = 31000 \text{ MPa}$ )

Time Dependence Options:  
 Compressive Strength and Stiffness (E)  
 Creep  
 Shrinkage

Common Parameters:  
 Time Model: EN1992-1-1:2004  
 Cement Type: Class N  
 Cement Type Coefficient,  $\alpha$ : 0.20  
 Cement Type Coefficient,  $\alpha'$ : 0.00  
 Notional Size,  $h_0 = 2A_s/u$ : 500.0 mm  
 Relative Humidity, %: 40 %  
 Age of Concrete at Start of Applied Load,  $t_0$ : 0 days  
 Age of Concrete at Start of Shrinkage,  $t_0$ : 0 days

EN1992-1-1:2004  
 Cement Type Coefficient,  $\alpha = d_1$ : 0.00  
 Cement Type Coefficient,  $\alpha = d_2$ : 0.00

Concrete

Material Name : C25/30  
 Material Color : 224, 224, 224

**Mechanical Properties**  
 Modulus of Elasticity : 33000.0 N/mm<sup>2</sup>  
 Shear Modulus : 12916.5 N/mm<sup>2</sup>  
 Poisson's Ratio : 0.20  
 Thermal Expansion Coeff. : 0.00001000 (1/°C)  
 Unit Weight : 25.000 kN/m<sup>3</sup>  
 Concrete Type : Normalweight Concrete

**Design Parameters**  
 Characteristic Compressive Strength ( $f_{ck}$ ) : 25.00 N/mm<sup>2</sup>  
 Characteristic Tensile Strength ( $f_{ctk}$ ) : 1.75 N/mm<sup>2</sup>  
 Material Coeff : 1.50

**Time Dependent Properties**  
 Time Model : CEB FIB 90  
 Compressive Strength and Stiffness : 0.000  
 Creep : 0.000  
 Shrinkage : 0.000

Apply to all members of this material class in this storey Time Dependent Properties... OK Cancel

Although highly parametric new models are developed, predicting creep in reinforced concrete structures still maintains its uncertainty. This complexity is due to the material itself and the problem of assessing time-dependent deformations and loss of prestressing forces, which are usually not considered in structural analysis. One can tackle this uncertainty and complexity in creep prediction to a certain degree by adapting the code procedures that give general guidance.

To specify the time-dependent concrete parameters in ProtaStructure:

1. Open the concrete material properties dialog.
2. Click on the "Time-Dependent Properties..." button.



3. Check the “Time Dependence Options” you want to consider in the deflection checks. If you wish to partially consider these parameters’ effect, you can enter values between 0 and 1. Entering ‘0’ or unchecking the related option will deactivate the parameter.
4. Select the “Time Model” that you want to use. Available options are CEB FIB 90 and EN1992-1-2004.
5. Specify other parameters like Cement Type, Relative Humidity, Start of Shrinkage, and Aggregate Type.

**Important:**

Time Dependent concrete properties will only be accessible if Eurocode 2 design code is selected. These parameters are not used in deflection checks according to other design codes. ACI318, IS456, NSR10-C, NSCP and SNI2847 cater for long term deflections by alternative formulation.

The time models will be automatically considered in Eurocode deflection checks (not in building analysis) once you assign the concrete material that you have edited to structural members.

## Eurocode 3: Design of Castellated Beams

We have developed castellated beam design compliant to Eurocode 3, complemented with a step-by-step detailed design report. Castellated beam design was brought to you in the previous ProtaStructure 2025. Eurocode support is new in ProtaStructure 2026.

**Vierendeel Check**

Definition	Parameter	Clause
Critical Load Combination	Dc+Lc-Ez+Ey+ (Comb Id: 25)	
Shear (Major)	V <sub>Ed</sub> = 5.07 kN	
Axial Compression	N <sub>Ed</sub> = 31.60 kN	
Bending (Major)	M <sub>Ed</sub> = 12.5 kNm	
Depth of Hole	h <sub>0</sub> = 300 mm	
Equivalent Opening Length	b <sub>eq</sub> = b <sub>0</sub> + 0.25 h <sub>0</sub> = 375 mm	Table 8.3
Plastic Compression Resistance	N <sub>T,Rd</sub> = F <sub>y</sub> A <sub>net</sub> / γ <sub>M0</sub> = 1059.31 kN	Eqn. 8.13
Plastic Moment Capacity	M <sub>T,Rd</sub> = F <sub>y</sub> W <sub>pl,y,net</sub> / γ <sub>M0</sub> = 17.3 kNm	Eqn. 8.13
Design Value of Axial Force on a Tee	N <sub>Ed</sub> = N <sub>Ed</sub> + M <sub>Ed</sub> / d <sub>net</sub> = 67.87 kN	Eqn. 8.13
Bending Resistance of Tee Considered Axial and Shear Forces	M <sub>ov1,Rd</sub> = M <sub>T,Rd</sub> ( 1 - ( N <sub>Ed</sub> / N <sub>T,Rd</sub> ) <sup>2</sup> ) = 17.2 kNm	Eqn. 8.13
Shear Resistance To Vierendeel Bending	V <sub>ov,Rd</sub> = ( 2 M <sub>ov1,Rd</sub> + 2 M <sub>ov2,Rd</sub> ) / d <sub>net</sub> = 183.83 kN	Eqn. 8.12
Utilization Ratio	V <sub>Ed</sub> / V <sub>ov,Rd</sub> = 0.028 < 1.000 ✓	Eqn. 8.11

**Web Post Bending Check**

Definition	Parameter	Clause
Critical Load Combination	Dc-Ez-Ey- (Comb Id: 58)	
Shear (Major)	V <sub>Ed</sub> = 2.32 kN	
Shear Force In the Bottom Tee	V <sub>Eds</sub> = V <sub>Ed</sub> / 2 = 1.16 kN	
Shear Force In the Top Tee	V <sub>Edt</sub> = V <sub>Ed</sub> / 2 = 1.16 kN	
Maximum Moment Difference Along Cascellated Beam Holes	ΔM <sub>max</sub> = 3.0 kNm	
Design Shear Force In The Horizontal Cross Section	V <sub>ov,Ed</sub> =  ΔM <sub>max</sub> / d <sub>net</sub>   = 8.70 kN	
Vertical Eccentricity	e <sub>0</sub> = 0.000	
Center to Center Spacing	s = 2300 mm	
Web-Post Moment at mid-length of opening	M <sub>ov,Ed</sub> = 0.5 ( V <sub>Eds</sub> - V <sub>Edt</sub> ) s = 0.00 kNm	
Edge to Edge Spacing of Holes	s <sub>0</sub> = 200 mm	
Elastic Bending Resistance	M <sub>ov,Ed</sub> = s <sub>0</sub> <sup>2</sup> I <sub>y</sub> F <sub>y</sub> / ( 6 γ <sub>M0</sub> ) = 17452.50 kNm	
Utilization Ratio	M <sub>ov,Ed</sub> / M <sub>ov,Rd</sub> = 0.000 < 1.000 ✓	

**Web Post Buckling Check**

Definition	Parameter	Clause
Critical Load Combination	Dc-Ez-Ey- (Comb Id: 58)	
Maximum Moment Difference Along Cascellated Beam Holes	ΔM <sub>max</sub> = 3.0 kNm	
Design Compression Force between Adjacent openings	N <sub>ov,Ed</sub> =  ΔM <sub>max</sub> / d <sub>net</sub>   = 8.70 kN	Eqn. 8.30
Reference Slenderness	λ <sub>1</sub> = π √( E / F <sub>y</sub> ) = 86.022	
Edge to Edge Spacing of Holes	s <sub>0</sub> = 200 mm	
Depth of Hole	h <sub>0</sub> = 300 mm	
Relative Slenderness of the Web Next To Opening	λ <sub>wp</sub> = Min ( 1.75 √( 2 s <sub>0</sub> <sup>2</sup> + h <sub>0</sub> <sup>2</sup> ) , 2.7 h <sub>0</sub> ) / ( A <sub>1</sub> I <sub>y</sub> ) = 0.881	Eqn. 8.33
Imperfection Factor	φ = 0.5 ( 1 + α ( λ <sub>wp</sub> - 0.2 ) + λ <sub>wp</sub> <sup>2</sup> ) = 1.054	
	χ <sub>wp</sub> = Min ( 1 / ( φ + √( φ <sup>2</sup> - λ <sub>wp</sub> <sup>2</sup> ) ) , 1 ) = 0.612	Eqn. 8.3.1.3 - EN1993-1-1:2002
Design Compression Force between Adjacent openings	N <sub>ov,Rd</sub> = χ <sub>wp</sub> s <sub>0</sub> I <sub>y</sub> F <sub>y</sub> / γ <sub>M0</sub> = 320.50 kN	Eqn. 8.31
Utilization Ratio	N <sub>ov,Ed</sub> / N <sub>ov,Rd</sub> = 0.027 < 1.000 ✓	Eqn. 8.28

# Crack Width Checks

In addition to long term deflection, crack width checks can also be performed again to Eurocode 2, ACI318, IS456, NSR10-C, NSCP, NTE060 and SNI2847 guidelines.

### Concrete Beam Deflection Check

ACI-318 [2019]      Building code Requirements for Structural Concrete (2019)

**1B1 - Storey: 1**

Flexural Member Type: Beam  
 Span Type: Exterior Span  
 Clear Span / Height: 4400 / 500 mm = 9 ≤ 18.63 (ACI318-19 Table 9.3.1.1)

Section Dimensions: 250 / 500 mm      d = 442 mm      d' = 58 mm  
 Flange Dimensions: b = 617 mm      h = 120 mm  
 Uncracked Section: I<sub>u</sub> = 3.832E-03 m<sup>4</sup>      y(b) = 259 mm      y(t) = 201 mm  
 Concrete: f<sub>c</sub>' = 30.00 N/mm<sup>2</sup>      f<sub>t</sub> = 5.10 N/mm<sup>2</sup>      E<sub>c</sub> = 25743.0 N/mm<sup>2</sup>  
 Steel: f<sub>y</sub> = 415.00 N/mm<sup>2</sup>      E<sub>s</sub> = 200000.0 N/mm<sup>2</sup>      E<sub>s</sub>/E<sub>c</sub> = 8

	Left Support	Right Support	Span
A <sub>u</sub> (I <sub>u</sub> /A <sub>u</sub> )	402 / 402 mm <sup>2</sup>	402 / 402 mm <sup>2</sup>	402 / 402 mm <sup>2</sup>
M(g) / M(g+Q)	-19.6 / -20.9 kN.m	-24.0 / -25.6 kN.m	14.7 / 15.7 kN.m
M <sub>u</sub>	97.5 kN.m	97.5 kN.m	65.3 kN.m
Cracking Status (G)	NO	NO	NO
Cracking Status (G+Q)	NO	NO	NO
Cracked Inertia (G)	-	-	-
Cracked Inertia (G+Q)	-	-	-
Effective Inertia (G)	3.832E-03 m <sup>4</sup>	3.832E-03 m <sup>4</sup>	3.832E-03 m <sup>4</sup>
Effective Inertia (G+Q)	3.832E-03 m <sup>4</sup>	3.832E-03 m <sup>4</sup>	3.832E-03 m <sup>4</sup>
Effective Inertia (G)		3.794E-03 m <sup>4</sup>	
Effective Inertia (G+Q)		3.794E-03 m <sup>4</sup>	
Immediate Def. (G)		3.5704E-04 m	
Immediate Def. (G+Q)		3.8163E-04 m	
Immediate Def. (Q)		2.4589E-05 m	
Loading Time		FIVE YEARS or MORE	
Total Time Dep. Deflection		9.8578E-04 m	

Flexural Member and Position: Storey/Roof Member Supporting Partition (Sensitive Load)  
 Total Deflection = 0.986 mm ≤ 9.167 mm (4400/480) ... **Adequate** ✓

#### Serviceability Limit State Combination Results

	Left Support	Right Support	Span
D+L, M	-20.9 kN.m	-25.6 kN.m	15.7 kN.m
M <sub>u</sub>	97.5 kN.m	97.5 kN.m	65.3 kN.m
Cracking Status	NO	NO	NO
Cracked Inertia			
Effective Inertia			
Effective Inertia			
Immediate Def.			
Total Time Dep. Deflection			

#### Crack Width Check (Span):

G + Q	Exposure Class	Dry Air or Protective Membrane
(Critical Combination)	Service Moment, M	15.7 kN.m
	Neutral Axis Depth, x	62 mm
	Reinforcing Steel Stress, f <sub>s</sub> = M / ((d - x) / 3)	92929.7 kN/m <sup>2</sup>
	β = (h - x) / (d - x)	0.0000
	Crack Width, w (ACI 224.1R Eq. (1-2))	0.0949 mm

Crack Width (W<sub>cr</sub>) = 0.09 mm ≤ 0.41 mm ... **Adequate** ✓

# IS Code: Load Transfer Check from Column to Footing

This feature was not a part of the initial ProtaStructure 2025 release, and it was released with 8.0.257 maintenance package. It is included here for our users who may not be aware of this feature. Feel free to skip this title if you are already familiar with this feature.

A new check was added for IS456 cl.34.4 that checks the load transfer from loaded column area to footing.

### Transfer of Load at the Base of Column

**IS 456 - 34.4**


Compressive load transferred from column to footing, P<sub>u</sub> = 132.04 kN  
 A<sub>2</sub> (Column Area) = 0.1250 m<sup>2</sup>  
 A<sub>1</sub> (Calculated using 1:2 slope) = 3.8850 m<sup>2</sup>  
 Footing Base Area = 1.4300 m<sup>2</sup>  
 ->A<sub>1</sub> = 1.4300 m<sup>2</sup>  
 Modification Factor, (A<sub>1</sub> / A<sub>2</sub>)<sup>0.5</sup> ≤ 2 = 2  
 Concrete Bearing Capacity = 0.45F<sub>ck</sub>(Modification Factor)A<sub>2</sub> = 3375.00 kN  
 Check: Concrete Bearing Capacity ≥ P<sub>u</sub>      Status: ✓



# Foundation Tie Beam Design to ACI318

This feature was not a part of the initial ProtaStructure 2025 release, and it was released with 8.0.257 maintenance package. It is included here for our users who may not be aware of this feature. Feel free to skip this title if you are already familiar with this feature.

Foundation tie beams can be defined in ProtaStructure to provide a horizontal connection between two columns at the foundation levels preventing lateral movements and relative displacements, especially if there are pad footings. To insert foundation tie beams, you can use **Modeling > RC Beam > Foundation Tie Beam** command. Once inserted, their design will be carried out considering the axial forces on the columns or walls they are connected to. Currently, the design can be done to US and Turkish codes.

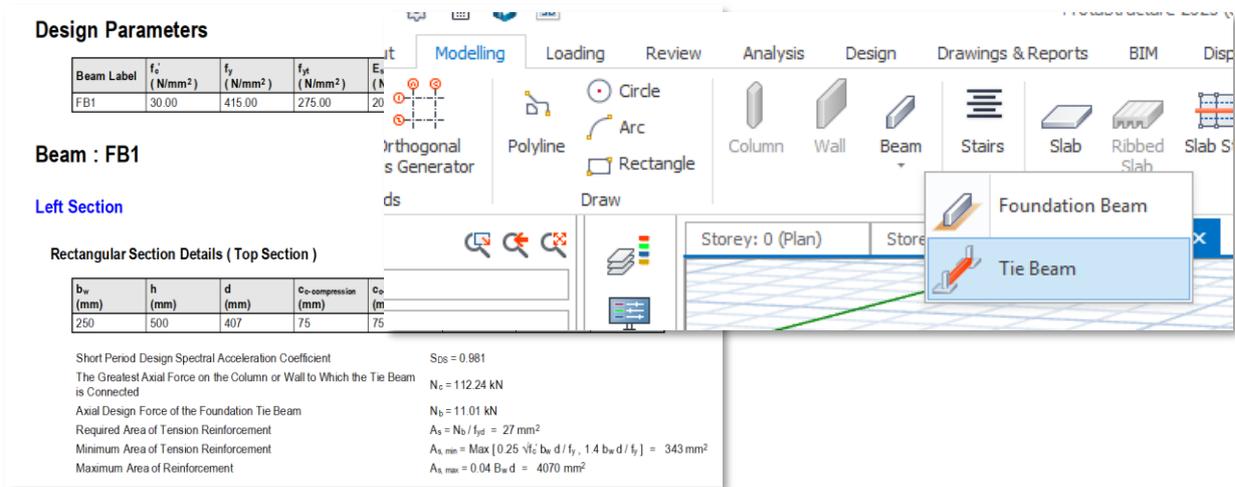

The screenshot displays the ProtaStructure software interface with the 'Design Parameters' panel on the left and a 3D model of a foundation tie beam in the center. The 'Design Parameters' panel includes a table for beam properties and a section for 'Rectangular Section Details (Top Section)'. A design results window is overlaid on the bottom left, showing various design coefficients and forces.

Beam Label	$f_c$ (N/mm <sup>2</sup> )	$f_y$ (N/mm <sup>2</sup> )	$f_{yt}$ (N/mm <sup>2</sup> )	$E_s$ (kN)
FB1	30.00	415.00	275.00	20

Beam : FB1

Left Section

Rectangular Section Details ( Top Section )

$b_w$ (mm)	$h$ (mm)	$d$ (mm)	$C_c$ -compression (mm)	$C_s$ (mm)
250	500	407	75	75

Short Period Design Spectral Acceleration Coefficient  $S_{De} = 0.981$

The Greatest Axial Force on the Column or Wall to Which the Tie Beam is Connected  $N_c = 112.24$  kN

Axial Design Force of the Foundation Tie Beam  $N_b = 11.01$  kN

Required Area of Tension Reinforcement  $A_s = N_b / f_{yd} = 27$  mm<sup>2</sup>



Minimum Area of Tension Reinforcement  $A_{s, min} = \text{Max} [0.25 \sqrt{f_c} b_w d / f_y, 1.4 b_w d / f_y] = 343$  mm<sup>2</sup>

Maximum Area of Reinforcement  $A_{s, max} = 0.04 B_w d = 4070$  mm<sup>2</sup>



# Enhanced Pad Footing Design



With the latest ProtaStructure, you can now enjoy improvements and new features in pad footing design such as design utilization ratio, BOB length control, global and batch settings for preventing rotation and ability to limit the maximum footing depth.

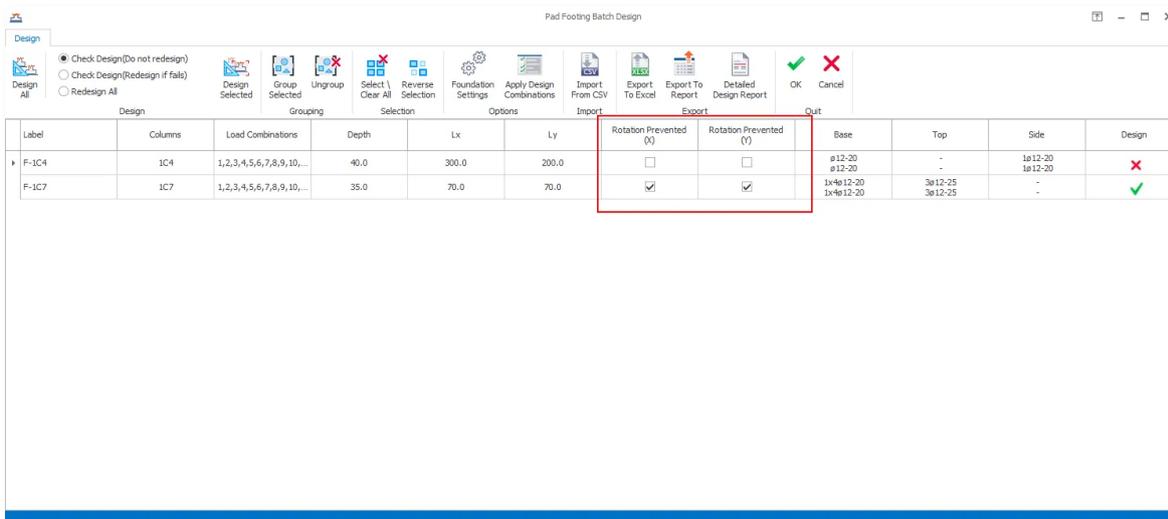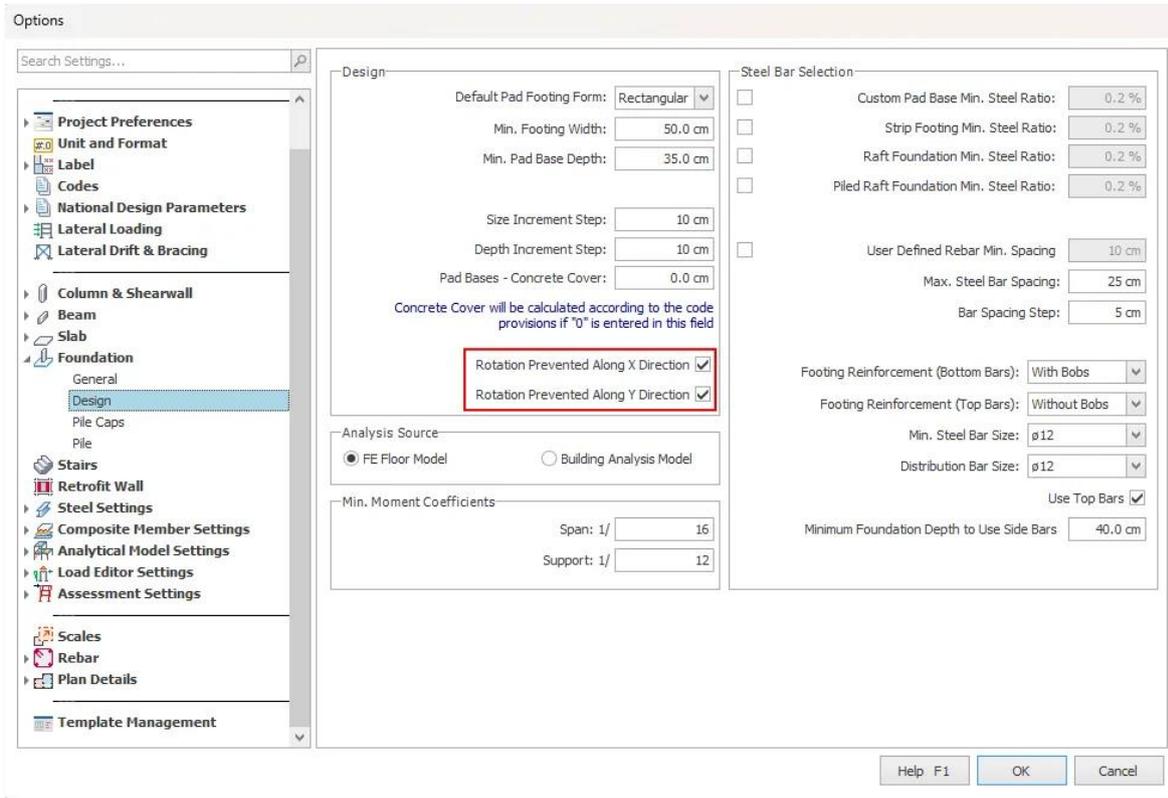

## Minimum Pad Footing Depth to Use Side Bars

This feature was not a part of the initial ProtaStructure 2025 release, and it was released with 8.0.257 maintenance package. It is included here for our users who may not be aware of this feature. Feel free to skip this title if you are already familiar with this feature.

A new option was added for side bar placement in pile caps and pad footings. This option works similarly to the “Use Top Bars” option; if the pad footing or pile cap has a greater depth than the specified value, side bars will be provided automatically, vice versa. The default value was designated as 400 mm. You can access this setting via **Settings > Foundation > Design**.

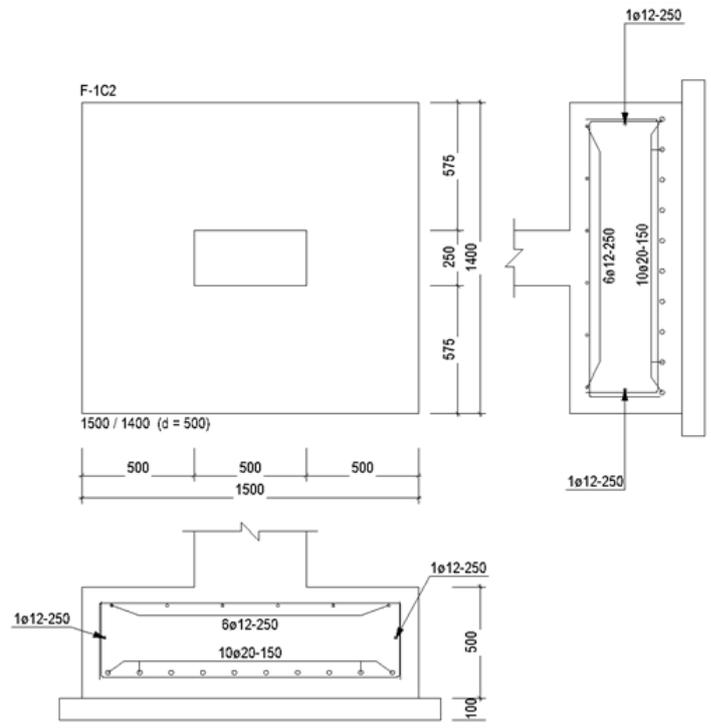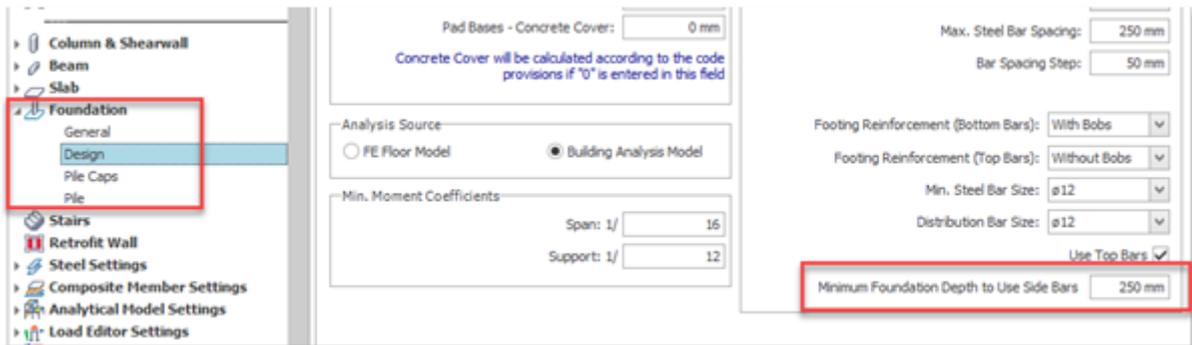


## Maximum Pad Footing Depth

ProtaStructure 2026 introduces a pivotal enhancement to pad footing design with the new "**Maximum Pad Base Depth**" parameter. This feature allows users to define a cap on the maximum permissible footing depth during design calculations, providing greater control over structural specifications. If the design requires a footing depth exceeding this predefined limit, the system will automatically flag the design as invalid. This ensures compliance with user-defined constraints and promotes more precise and efficient design processes.

Please note that incorrectly setting the maximum depth could lead to unnecessary design failures, causing frustration or requiring adjustments. Additionally, accommodating a wide range of design conditions can be demanding while ensuring the parameter remains relevant and effective. In some cases, enforcing a maximum depth could constrain design flexibility, potentially leading to less cost-efficient solutions. Footing depth parameter has a direct effect on one-way shear resistance, punching resistance, moment capacity and reinforcement in the footing.

You can access this setting via **Options > Foundation > Design**. Pad footing design must be updated after this parameter is changed.

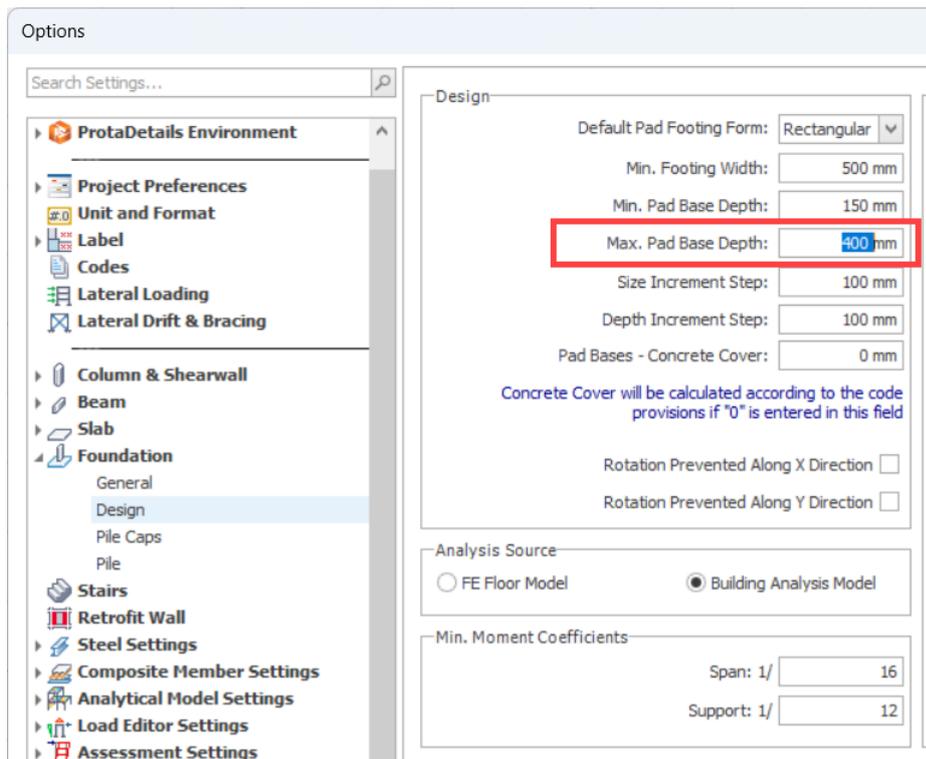

# Analysis Improvements




## Punching Checks with Finite Elements

This feature was not a part of the initial ProtaStructure 2025 release, and it was released with 8.0.217 maintenance package. It is recapped here for our users who may not be aware of this powerful feature. Feel free to skip this title if you are already familiar with this feature.

ProtaStructure 2026 introduces enhanced support for punching shear checks for flat slabs and raft foundations in compliance with both the **ACI318** American and **IS456** Indian Codes (and other similar codes including **NSR10**, **NTE030**, **Dominican Republic**, **Indonesia**, **Philippines** and **Thailand** – *Eurocodes still in progress*). This latest version can automatically calculate the out-of-plane shear forces, V13 and V23, around the punching perimeter and incorporate them into the punching shear analysis.

## Inclusion of Column Outlines

To increase the accuracy of punching shear checks with finite element results, the column outlines will always be cropped out of the finite element mesh for flat slabs and raft foundations, if there are no beams connected to a particular column, or the column is not connected to a wall.

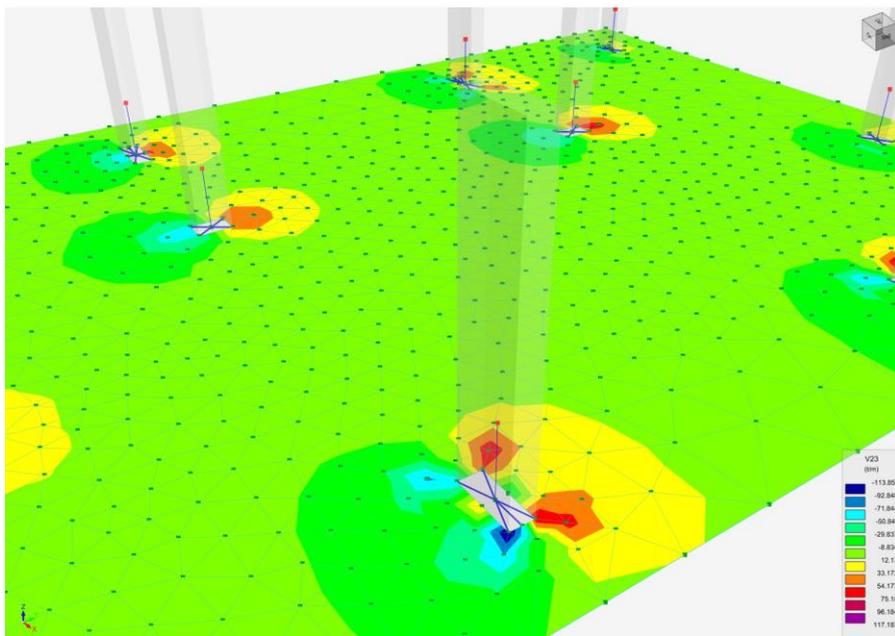

### Important


Column outlines will always be cropped from the FE mesh if there are no beams or walls connected to the column. This will increase the accuracy of punching shear checks for flat slabs and raft foundations. The existing setting “**Include Column Outlines**” is only valid for columns with connecting beams.

Column outlines are not included in FE mesh for columns with column drops or for columns inside or at the corners of shearwalls.




## Methodology

The maximum value of shear stress is obtained by collecting results from the punching perimeter which can be rectangular, circular or irregular depending on the column and slab geometry. Results are collected for each combination and the envelope value is used.

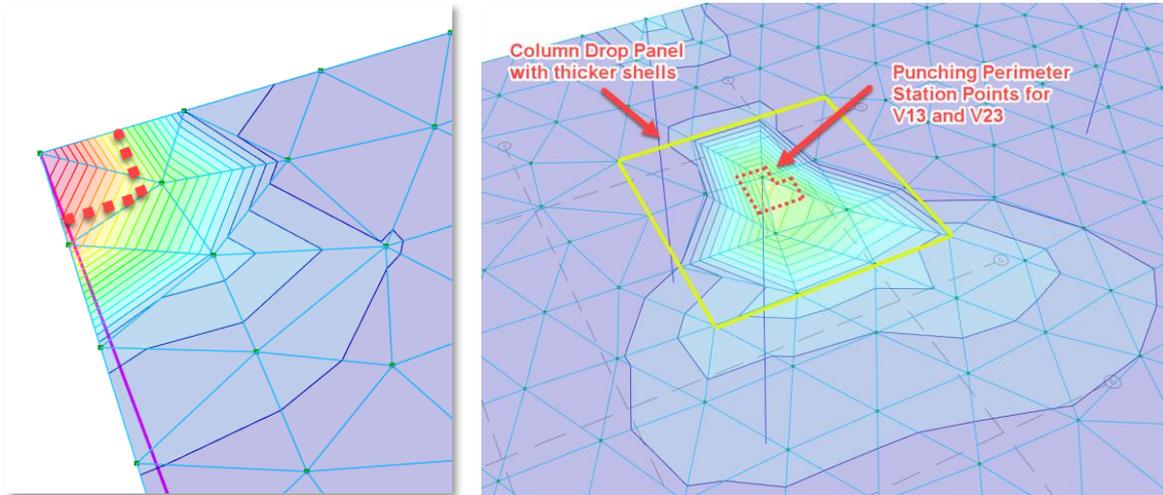

*V23 shear contours and punching station points for envelope combinations in analysis post-processor.*

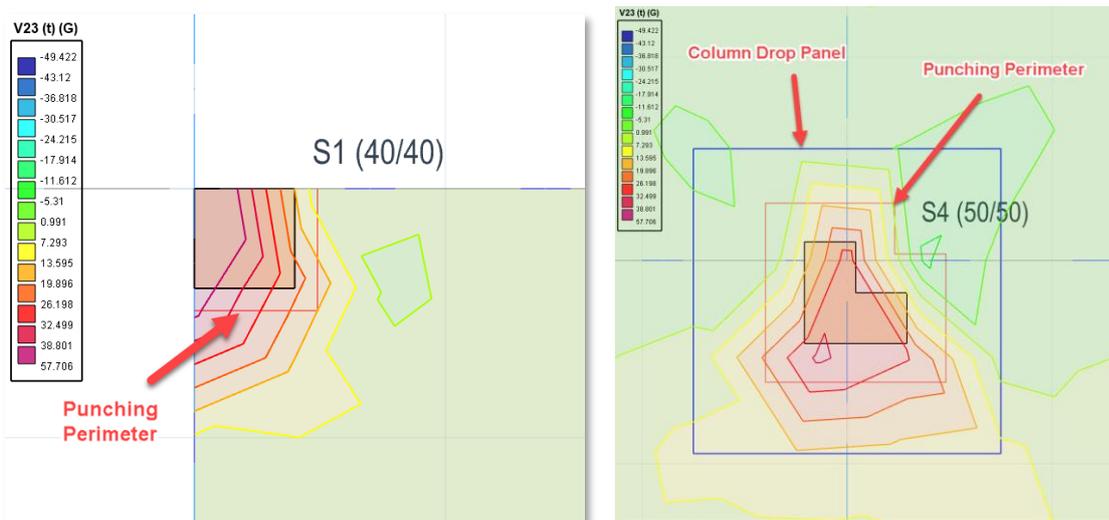

*Column drop panels, punching perimeters and shear contours shown simultaneously on physical floor plan*

The methodology and formulation are different for different design codes, but in principle, if the concrete tensile strength is solely enough to counteract the punching stresses around the punching perimeter, then no additional punching reinforcement is calculated. However, if punching stress is larger than concrete tensile strength then the punching reinforcement is calculated by ProtaStructure.


Existing slab reinforcement and additional patch reinforcement (if any) will be considered as punching reinforcement.






# Editable Accidental Eccentricity and Overturning Safety Factors

To strike a balance between automation and control, ProtaStructure 2026 now supports user-defined entries for accidental eccentricity and seismic overturning safety factors. This enhancement empowers users to tailor their designs with greater precision and flexibility. These settings can be found in **Seismic Parameters > Analysis** and **Seismic Parameters > Settings** locations.

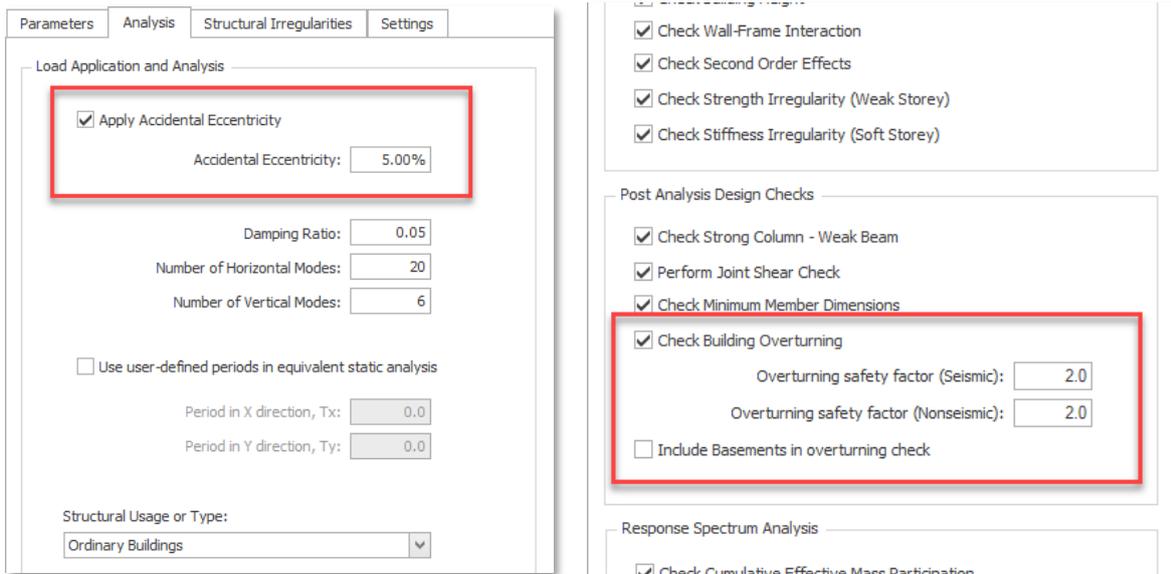

## Designate Storeys as 'Intermediate'

ProtaStructure 2026 allows you to designate any storey as an intermediate storey. Intermediate storeys can be partial installations between two storeys, structural members, or internal setbacks used for various purposes. If these members are defined on a different storey, ProtaStructure will enable you to designate it as an intermediate storey, excluding it from irregularity checks while still considering the full stiffness, mass, and load in the building analysis.

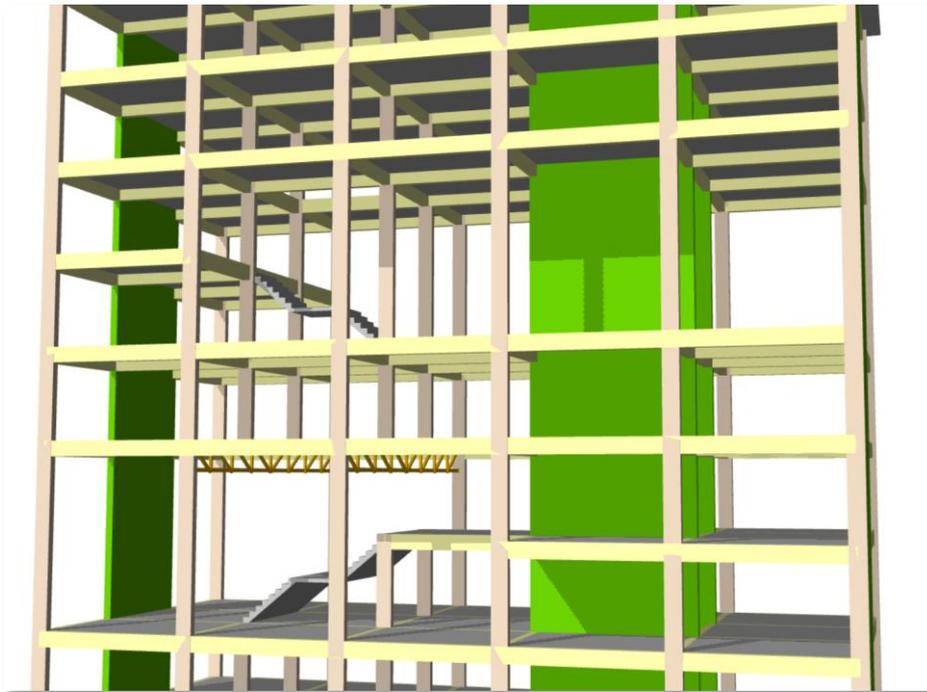

To set a storey as intermediate,

1. Open the Storey Editor using the **Edit Storey** command
2. Find the storey row on the table and set **Storey Type** to **Intermediate**.

**Edit Storey**

Info	Stor...	h (mm)	Level (mm)	Label	Description	Storey Type	D1 (mm)	D2 (mm)	Wall1 (m2)	Wall2 (m2)	Imp. Load Reduction	Live Load Participation	Structural System	Similar Storeys
<input checked="" type="checkbox"/>	1	3000	3000	1		Normal	25000	12000	0.00	0.00	0.00	0.5	RC	
<input checked="" type="checkbox"/>	2	3000	6000	2		Normal	25000	12000	0.00	0.00	0.00	0.5	RC	
<input checked="" type="checkbox"/>	3	3000	9000	3		Intermediate	15000	12000	0.00	0.00	0.00	0.5	RC	
<input checked="" type="checkbox"/>	4	3000	12000	4		Normal	25000	12000	0.00	0.00	0.00	0.5	RC	
<input checked="" type="checkbox"/>	5	3000	15000	5		Intermediate	25000	12000	0.00	0.00	0.00	0.5	RC	
<input checked="" type="checkbox"/>	6	3000	18000	6		Normal	25000	12000	0.00	0.00	0.00	0.5	RC	
<input checked="" type="checkbox"/>	7	3000	21000	7		Normal	25000	12000	0.00	0.00	0.00	0.5	RC	
<input checked="" type="checkbox"/>	8	3000	24000	8		Normal	25000	12000	0.00	0.00	0.00	0.5	RC	
<input checked="" type="checkbox"/>	9	3000	27000	9		Normal	25000	12000	0.00	0.00	0.00	0.5	RC	
<input checked="" type="checkbox"/>	10	2000	29000	10		Normal	5000	4000	0.00	0.00	0.00	0.5	RC	

**Imposed Load Reduction**

Apply

Reset

**Similar Storey**

Define Selected Storeys as Similar

Reset

Effective Top Storey No:

No. of Rigid Basements:

1st Storey Bottom Level:

Foundation Depth:

Footing Label:

Footing Description:





**Storey Type**

Help F1
 OK
 Cancel




## Meshing Same Storey Slabs Positioned on Top Of Each Other

In ProtaStructure 2026, you can now model and mesh multiple slabs positioned on top of each other in the same storey for finite element analysis. This improvement allows you to address more complex structural configurations by enabling the meshing of slabs at different elevations, whether within the same storey or at the foundation level. In earlier versions, only one slab in the same storey was included in the mesh, limiting the accuracy of the analysis.

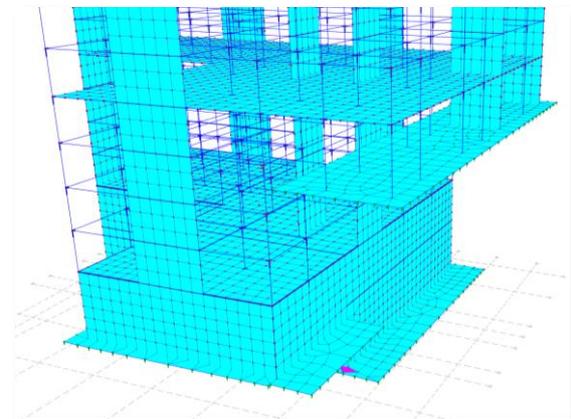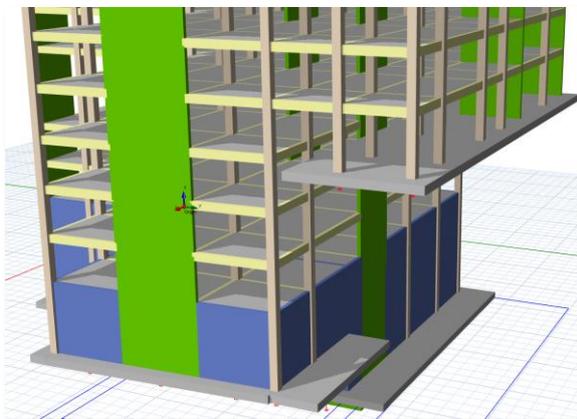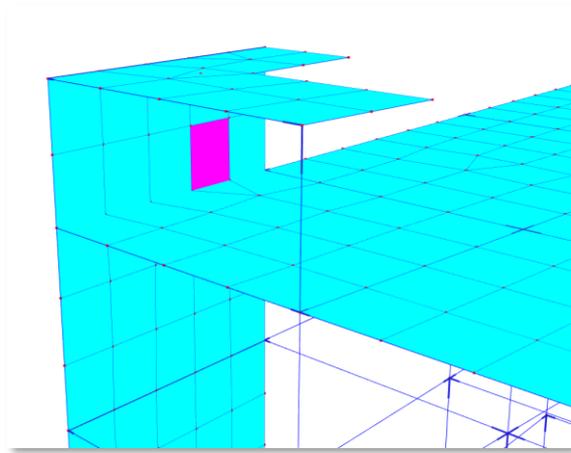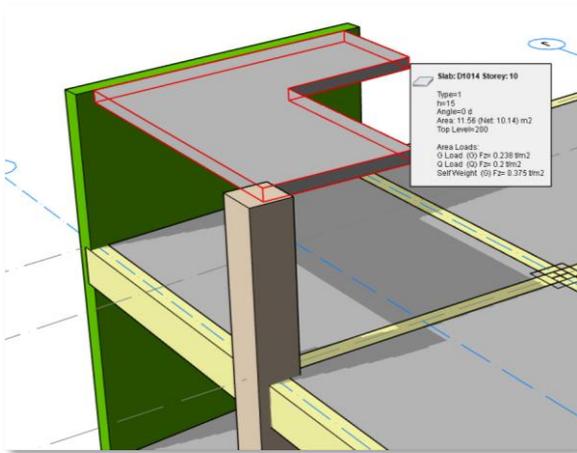

To use this feature:



1. Open the **Slab Properties** window.
2. Enter the slab's relative elevation difference from the storey level into the "Rel. Level" field.
3. Make sure to check "Apply Z to Analytical Model" option to consider this elevation difference in building analysis.

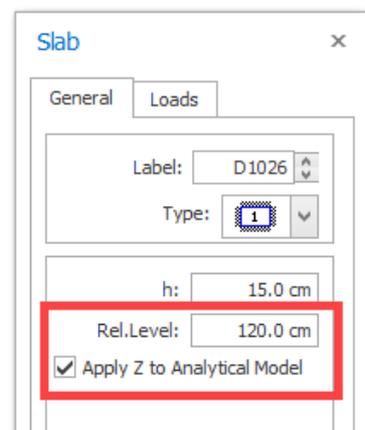

## Using Quad Mesh for Slabs in FE Analysis

We now introduce quadrilateral shell elements in slabs. The mesh density is automatically adjusted by ProtaStructure considering the minimum mesh size the user specifies.

The default shell element type in ProtaStructure will be the QUAD members from now on. However, our meshing algorithm will automatically resort to triangular elements whenever the geometry demands. In that case, a mix of triangular and quadrilateral elements will be used.

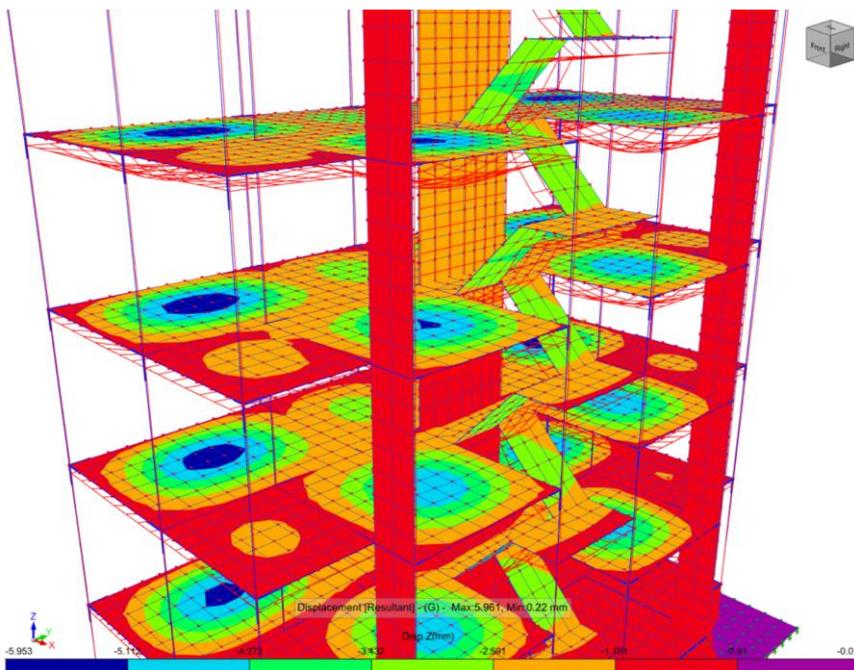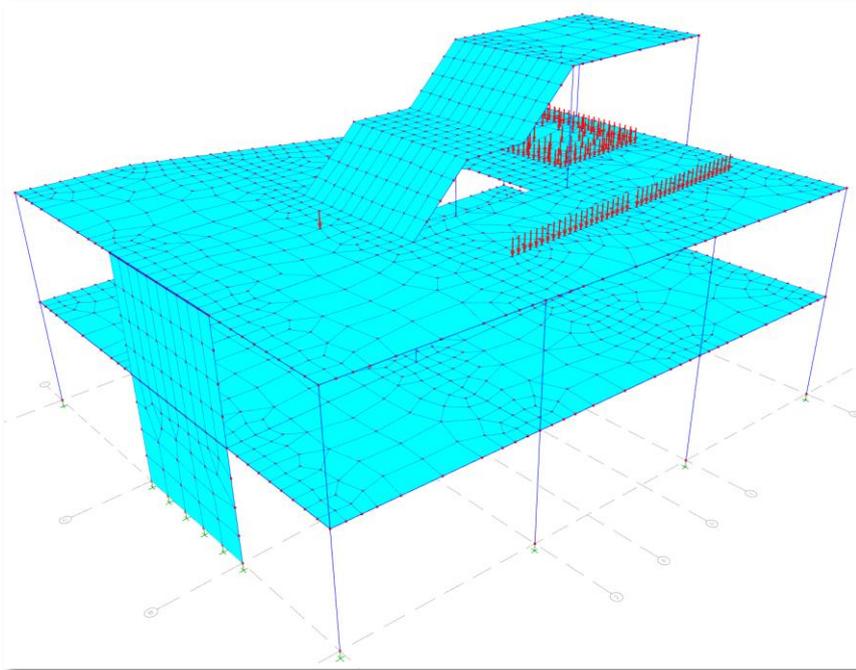

## Shearwall Stiffness Modifiers Only in Critical Storeys

We are improving our seismic analysis and design capabilities with each version providing you with more effective tools that create huge differences when it comes to rigorous checks. ProtaStructure now brings a new option for Shearwall Stiffness Modifiers applied only in Critical Storeys for better control on simulating the structural behavior.

To activate this functionality, Check the “Do not Reduce the Stiffnesses of Walls Above Critical Height” option on **Building Analysis > Model Options > Model > Material and Section Effective Stiffness Factors** window.

**Effective Material and Section Stiffness Factors**

	Elasticity Modulus	Axial Area		Bending Stiffness	Shear Area	Torsional Constant
<b>Shearwalls (Shell)</b>	1.00	1.00	In Plane	1.00	1.00	1.00
	1.00	1.00	Out of Plane	0.35	1.00	1.00
<b>Shearwalls (Frame)</b>	1.00	1.00	Major	0.35	1.00	1.00
	1.00	1.00	Minor	0.35	1.00	1.00
<b>Basement Walls</b>	1.00	1.00	In Plane	0.35	1.00	1.00
	1.00	1.00	Out of Plane	0.35	1.00	1.00
<b>Slabs</b>	1.00	1.00	In Plane	1.00	1.00	1.00
	1.00	1.00	Out of Plane	0.25	1.00	1.00
<b>Columns</b>	1.00	1.00		0.70	1.00	1.00
<b>Beams</b>	1.00	1.00		0.35	1.00	1.00
<b>Coupling Beams</b>	1.00	1.00		0.35	1.00	1.00
<b>Vertical-Only RC Column</b>				0.01		
<b>Vertical-Only RC Beam</b>				0.01		
<b>Vertical-Only Steel Column</b>				0.01		
<b>Vertical-Only Steel Beam</b>				0.01		
<b>Vertical-Only Primary Composite Beam</b>				0.01		
<b>Vertical-Only Secondary Composite Beam</b>				0.01		

You can modify the elasticity modulus, section areas, moment of inertias and torsional constants of the member groups to be used in the analysis model. For example, you can enter 0.05 to reduce the moment of inertia values by 95% to reduce the lateral stiffnesses of the columns.

Note: In order to apply these factors, building analysis must be repeated. These factors will be applicable only for load cases for which cracked section properties are used.

Do Not Reduce the Stiffnesses of Walls Above Critical Height

Default Values

OK

Cancel




# Automated Soil Dynamic Load Cases and Snow Drift Load Cases

In ProtaStructure 2026, we have taken a significant step forward in load calculation and combination capabilities. While ProtaStructure already supports the calculation of dynamic soil thrust and snow drift loads, users previously needed to manually create user-defined load cases to assign these loads.

With the latest version, ProtaStructure now introduces automated generation of **soil dynamic load cases** and **snow drift load cases**. These load cases are seamlessly integrated into the analysis process and are automatically combined with other load cases using the appropriate combination factors. This advancement not only simplifies the workflow but also ensures consistency and accuracy in structural analysis by minimizing manual input and potential errors. However, users are still required to manually assign the calculated loads to these automatically created load cases.

This enhancement empowers users to handle complex loading scenarios more efficiently, making ProtaStructure an even more robust and user-friendly tool for modern structural design.

You can define these additional load cases using the Loading Generator in ProtaStructure. Make sure you check “**Define Combinations for Snow Drift Loads (Sd1, Sd2)**” and “**Create Dynamic Soil Load Cases**” options.

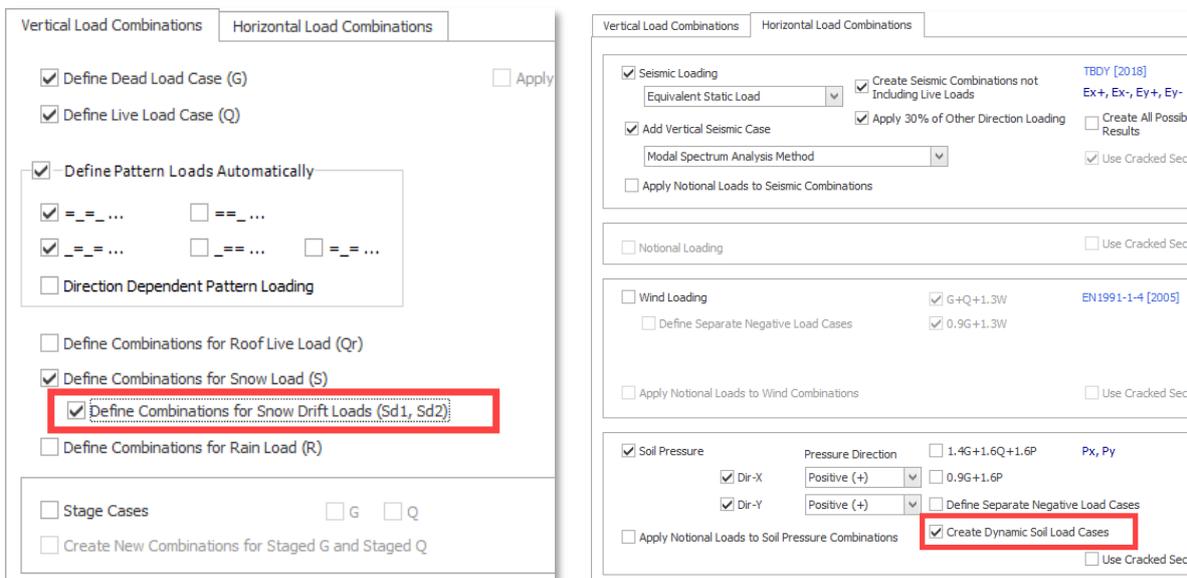

## Automated Body Constraints in Column Outlines

We are continuously enhancing the automated analytical model in ProtaStructure to ensure compatibility with industry standards and accurate structural behavior.

ProtaStructure automatically crops column outlines from the finite element (FE) slab mesh in flat slabs and raft foundations. This well-established feature allows for more realistic and economical designs by eliminating the unrealistic peak stress values that occur when a column connects to a slab at a single point.

In ProtaStructure 2026, we have introduced a new feature—**automated Body Constraints**. This enhancement automatically defines constraints between column joints and adjacent slab mesh points, accurately simulating the effect of the column section on the mesh. The Body Constraints ensure that the joints on the top plane move as a rigid body, offering a more precise mathematical simulation and addressing the relative rigidity limitations of the previous rigid link approach.


Previously, ProtaStructure employed rigid links to connect column joints to slab mesh points. Although widely used in practice, this method introduced additional stiffness and complexity to the system of equations, indirectly affecting simulated behavior and design outcomes.

### Note:

Rigid links will continue to be used where necessary, such as for connecting structural members with non-matching eccentricities, to maintain a consistent and well-formed analytical model. The automated Body Constraints feature is specifically applied to cropped column outlines in flat slabs and raft foundations.

### Important Remark:


Joints with body constraints will not conflict with diaphragm constraints (if exists) which are also (optionally) defined automatically at floor levels. The DOFs relevant to horizontal diaphragms will not follow body constraint whereas other DOFs will follow it. If there is no rigid diaphragm (flexible diaphragm), all the slave DOFs will follow body constraint master joint, which is the column top or bottom joint.

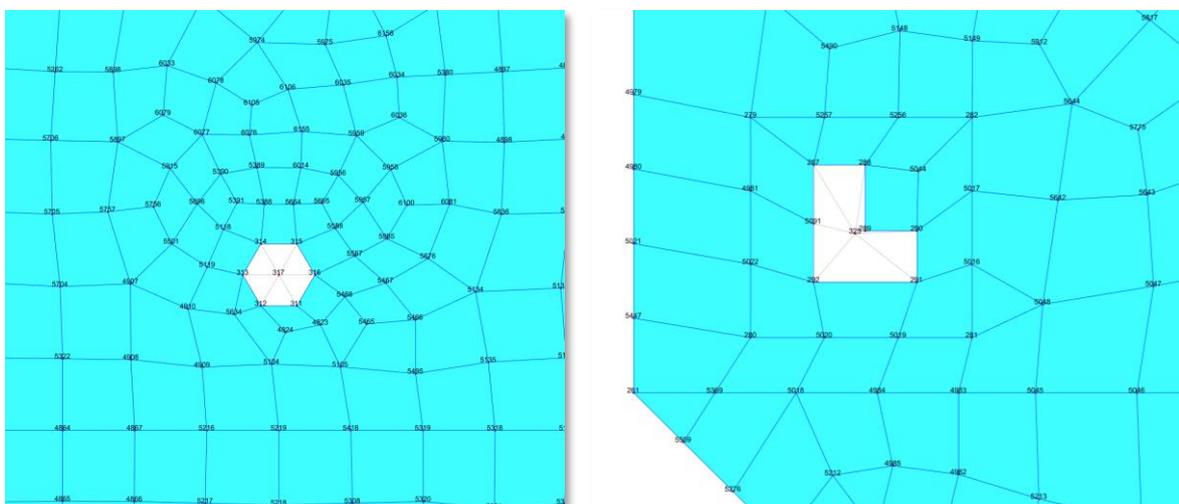

## Automated Unit Conversion for Ground Motions

This feature was not a part of the initial ProtaStructure 2025 release, and it was released with 8.0.217 maintenance package. It is included here for our users who may not be aware of this feature. Feel free to skip this title if you are already familiar with this feature.

ProtaStructure allows users to input any ground motion record (accelerogram) manually. Accelerograms should be entered in **gravitational acceleration (g)** units. However, the downloaded accelerogram may be in one of  $m/s^2$ , gal ( $cm/s^2$ ) or  $ft/s^2$  units, instead of 'g'. You can now select the input unit while introducing the accelerogram to ProtaStructure. The accelerogram will be automatically converted to 'g' units.

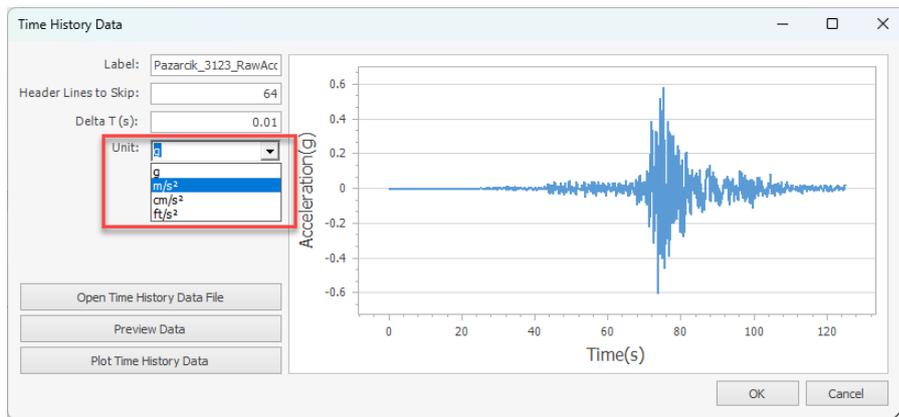


# Modeling and Visualization



## A Customizable Shortcut Editor

Engineers love shortcuts. But let’s admit some of the useful shortcuts were hidden and not customizable, even easy to forget. We have developed the new shortcut editor where you can review all program shortcuts and assign new key bindings. It was a frequently asked feature, indeed.

The shortcut editor is located at **Settings > ProtaStructure Environment > Shortcut Key Bindings** menu.

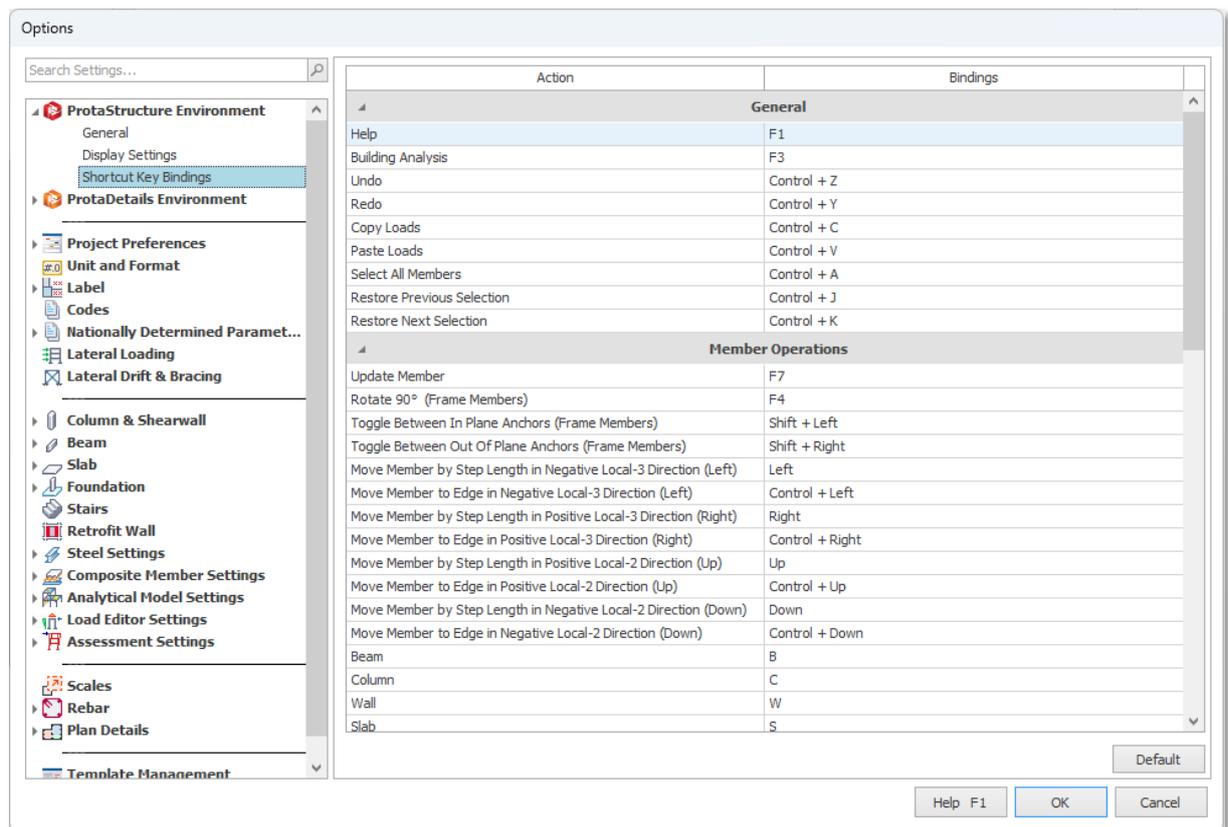

## Changing the Key Bindings

To change the key bindings,

1. Double click on the Bindings cell next to any action.
2. “Please enter shortcut...” prompt will be displayed on the screen and the UI will be in listening mode waiting for you to enter the key combinations using the keyboard.
3. Enter the new key combination for the action.

### Note:


If the new key combination is used by another action, you must first change the binding for that action and make sure that the new key binding is not used by any action. You can then assign it to the action you want.



## Additional Shortcuts

With the New Shortcut Editor, comes additional new key combinations for some of the most frequently used commands. Additionally, the capabilities of some of the commands have been improved.

- Insertion commands of different member types can now be bound to their individual key combinations.
- All members in the arena can be selected using a new key combination (CTRL+A by default)
- Right-Click Context Menu now suggests assigned shortcut keys.

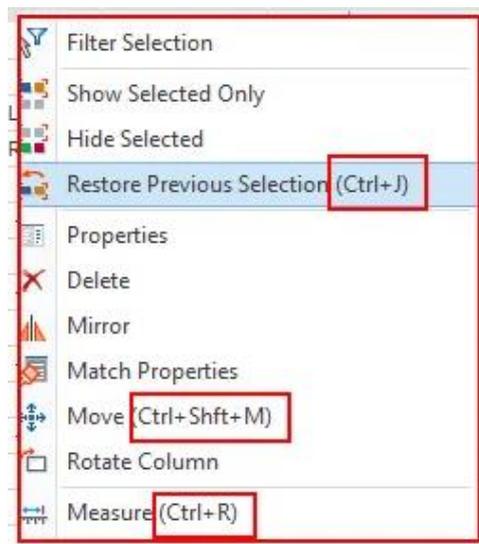


## Architectural DXF Drawing Overlay in Load Editor


ProtaStructure 2026 introduces a transformative feature that elevates the load definition process: the ability to overlay architectural DXF drawings on the interactive load editor. With this enhancement, users can seamlessly reference architectural plans while defining loads, ensuring alignment with the design intent. Additionally, the capability to snap directly to points within the DXF drawing enables precise load placement, enhancing accuracy and reducing potential errors. The DXF drawing is meticulously positioned at the exact coordinates specified in the main modeling screen, ensuring consistency and coherence between the structural model and the architectural layout. This feature streamlines workflows, offering greater precision and efficiency in load definition.


To display the architectural drawing in the load editor:

1. Load a DXF drawing on the main modeling screen using the Building Setout > External Reference Drawing command. Please note that different DXF drawings can be inserted for different stories. Details of how to load a DXF drawing are out of scope of this document.

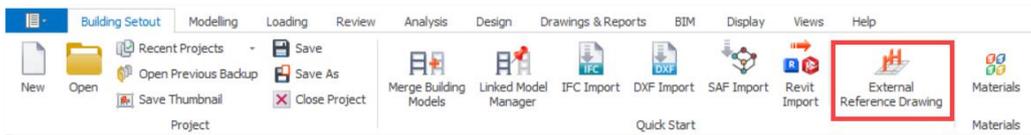


2. Open the load editor for the active storey or a selected member.
3. Click the **Show XRef Drawing** button on the vertical toolbar to show/hide the Xref drawing in the load editor.

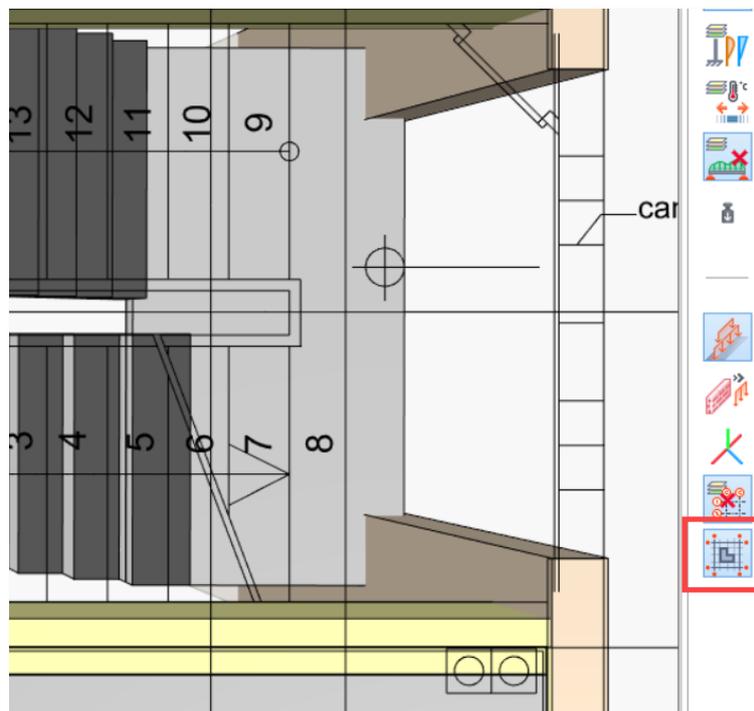

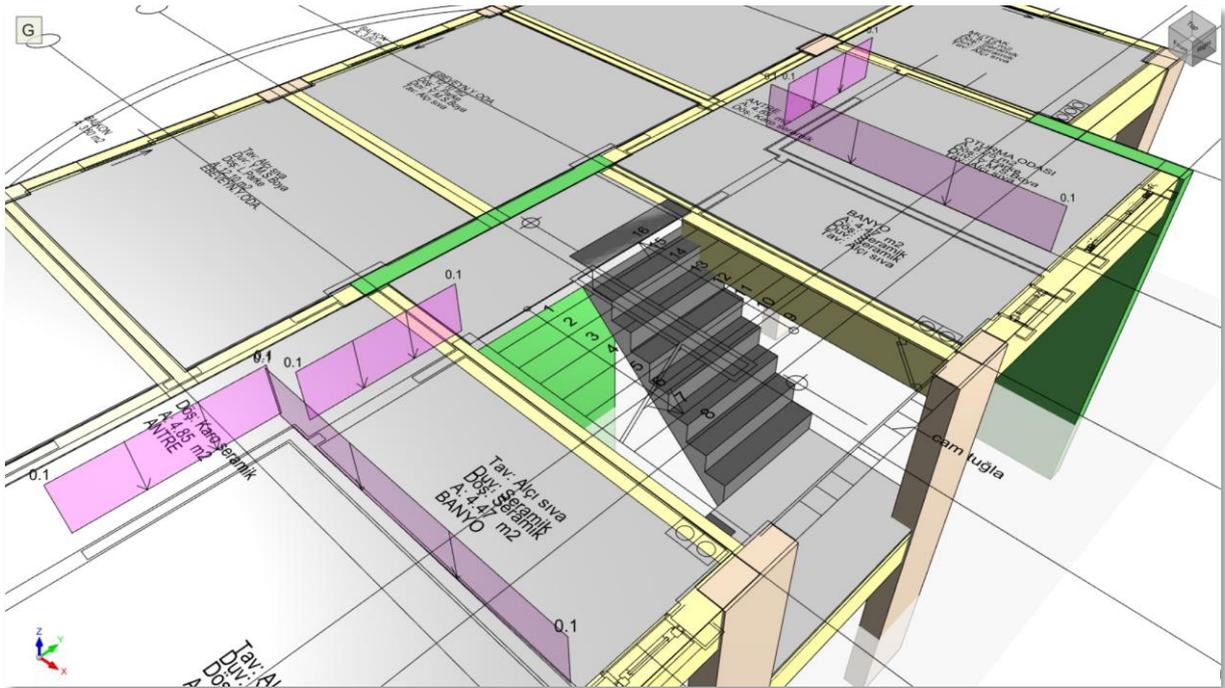

Load Editor opened for the active storey, displaying all members at that storey together with the DXF drawing on top of them.


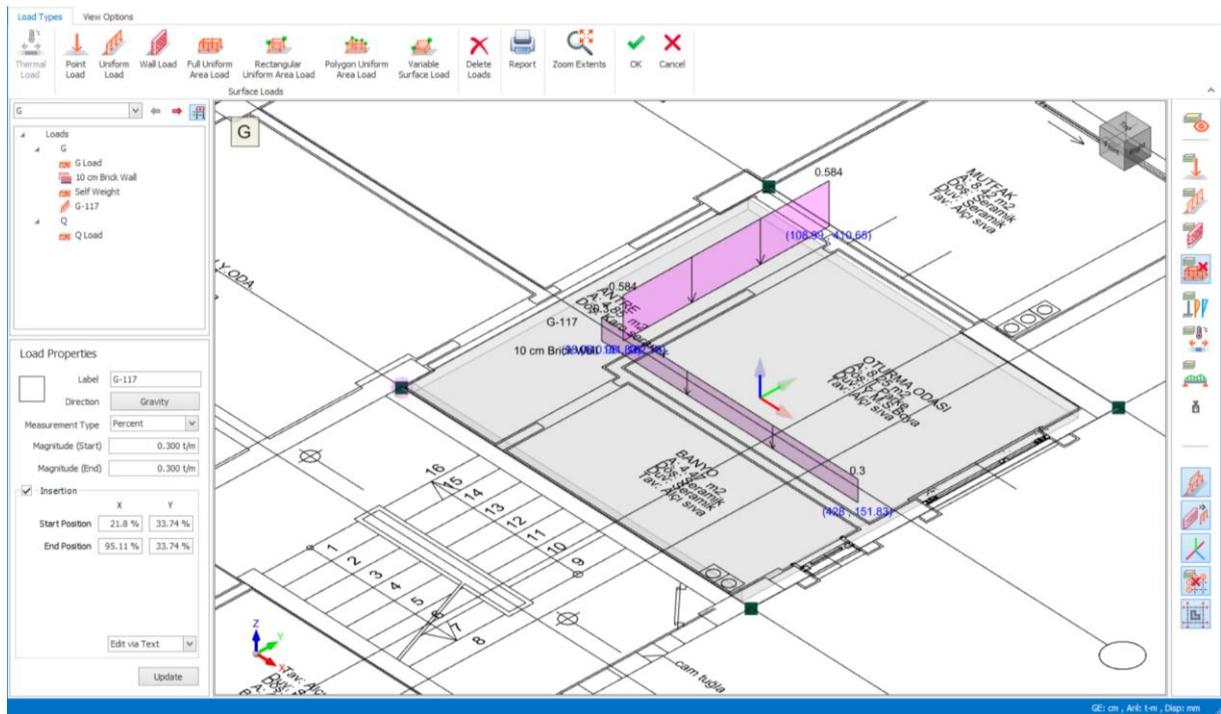


Load Editor opened for a selected slab. The XRef drawing can be shown even if a single member is selected.



## Snap to XRef Drawing Points to Insert Loads

Once the architectural drawing is displayed on the load editor, you can start inserting loads by snapping to points on the architectural drawing. You can snap **Line End Points**, **Mid Points** and **Intersections**. **Smart Points** on the line will also be highlighted at the ends and middle points.

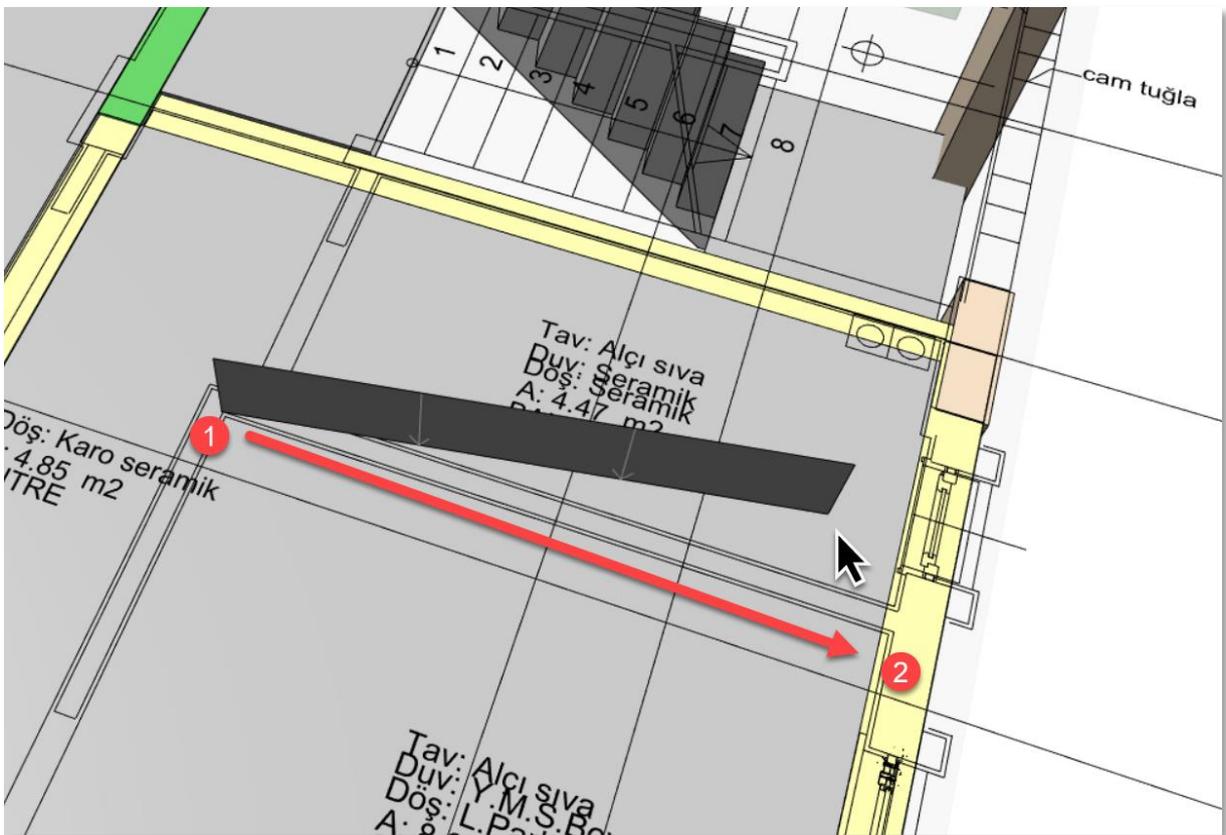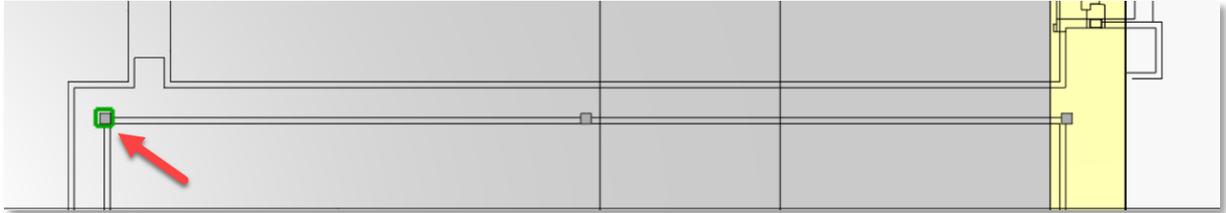


*Inserting a line load or a wall load on the load editor by snapping to DXF points.*



## Continuous Girts (and Purlins)


In previous versions of ProtaStructure, girts were automatically cut at every support, and a new girt frame was inserted after that.


With ProtaStructure 2026, you can now specify a **Maximum Member Length (Cut Length)** for girts. You can access this setting from **Steel Settings > Member Design**.

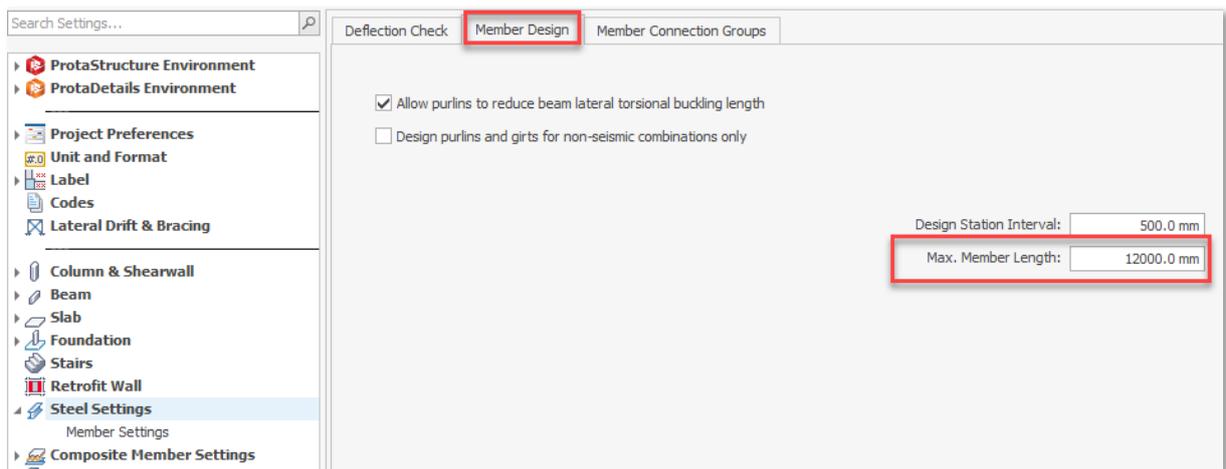


To model a continuous girt:

1. Specify the cut length using the **Steel Settings > Member Design > Max. Member Length** field. The default value is 12 m.
2. While inserting the girt, check the **Continuous Girt** option on the **Girt Properties Window**.

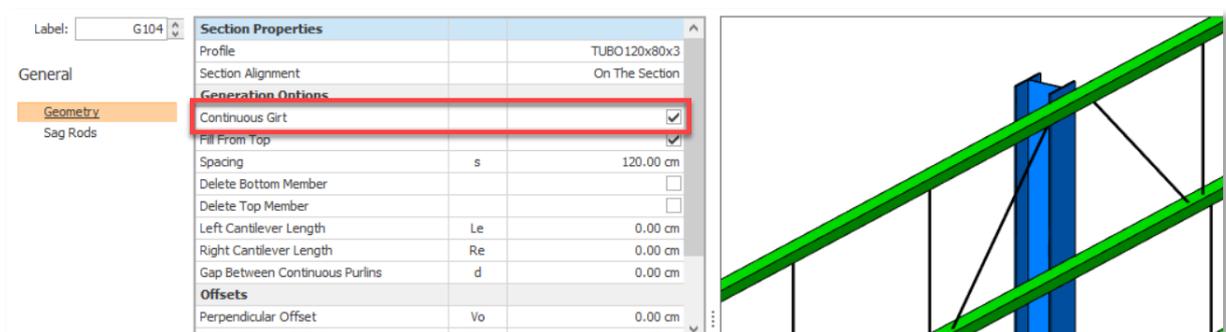

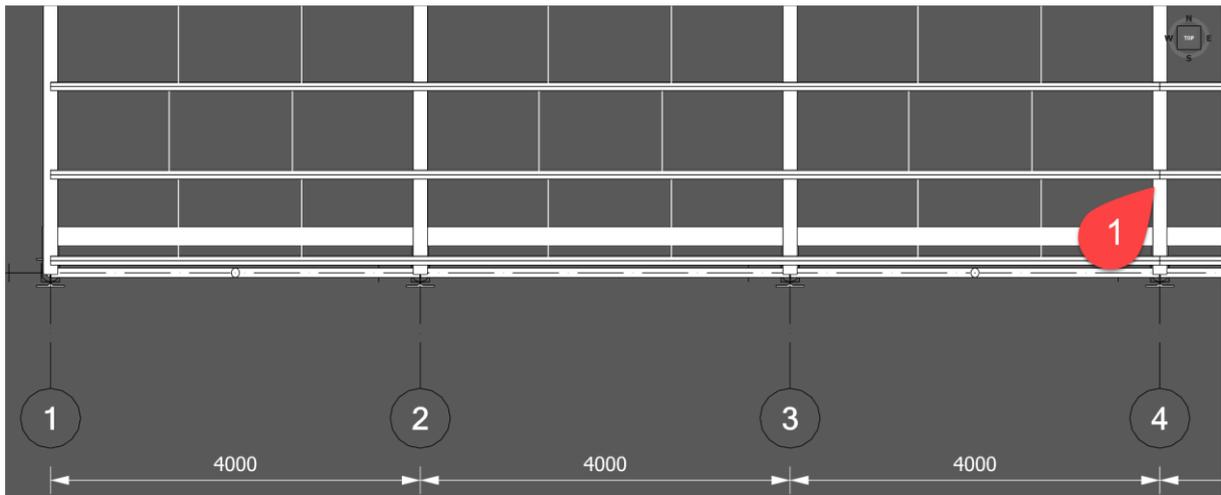

**Continuous Girt/Purlin Option Checked:** The purlin/girt is only cut at third support. Cut length is specified as 12 m in a 4 m bay frame

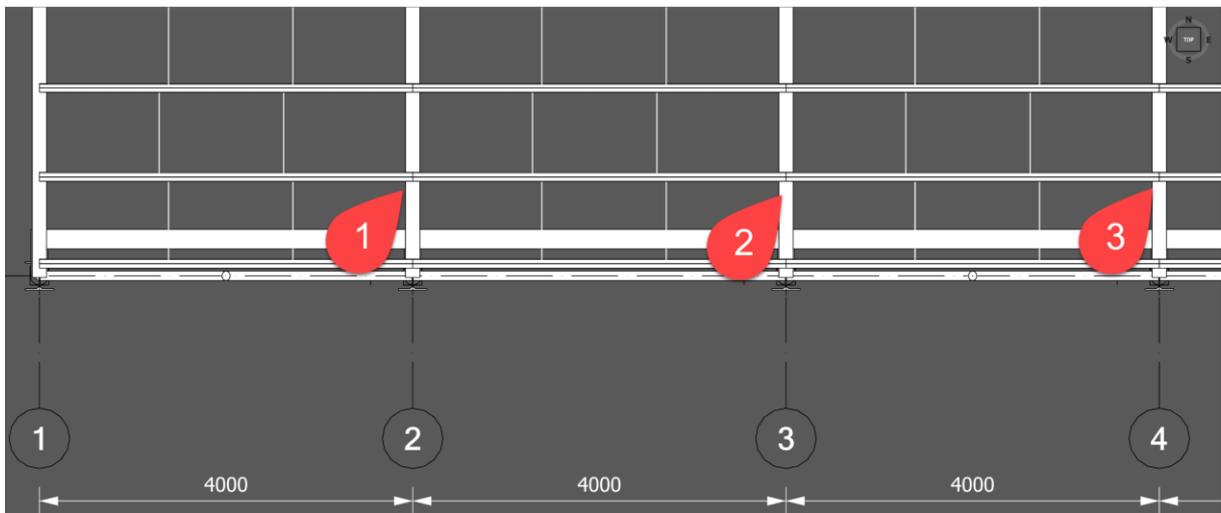

**Continuous Purlin/Girt Option Unchecked:** The purlin/girt is cut at each support

Continuous purlins were already introduced with the previous version. With ProtaStructure 2026, we are now introducing the same feature for girts.

The purlins and girts will be cut from the closest support to the given cut length, ensuring they don't exceed the manufactured steel length.

Between the cut points they will be treated continuous and end releases will be assigned accordingly. They are also communicated to **ProtaSteel** with the correct cut length and end releases so that you have a **fabrication-compatible** structural model.





## Display Support Reactions in Analysis Post-Processor

ProtaStructure now features the ability to display support reactions with vector graphics under the supported members. This highly requested feature is now available, enhancing visualization and analysis capabilities for users.


To display the support reactions:

1. Open the analysis post processor window.
2. Check **Support Reactions** button under **Members > Nodes** ribbon group.

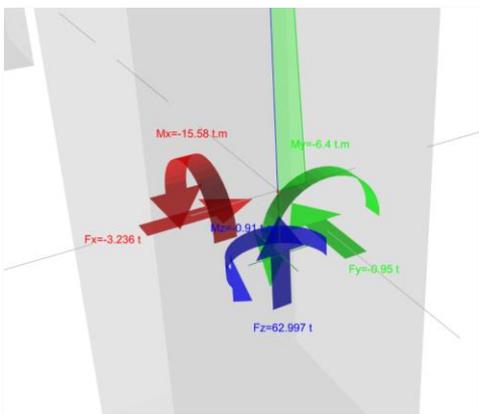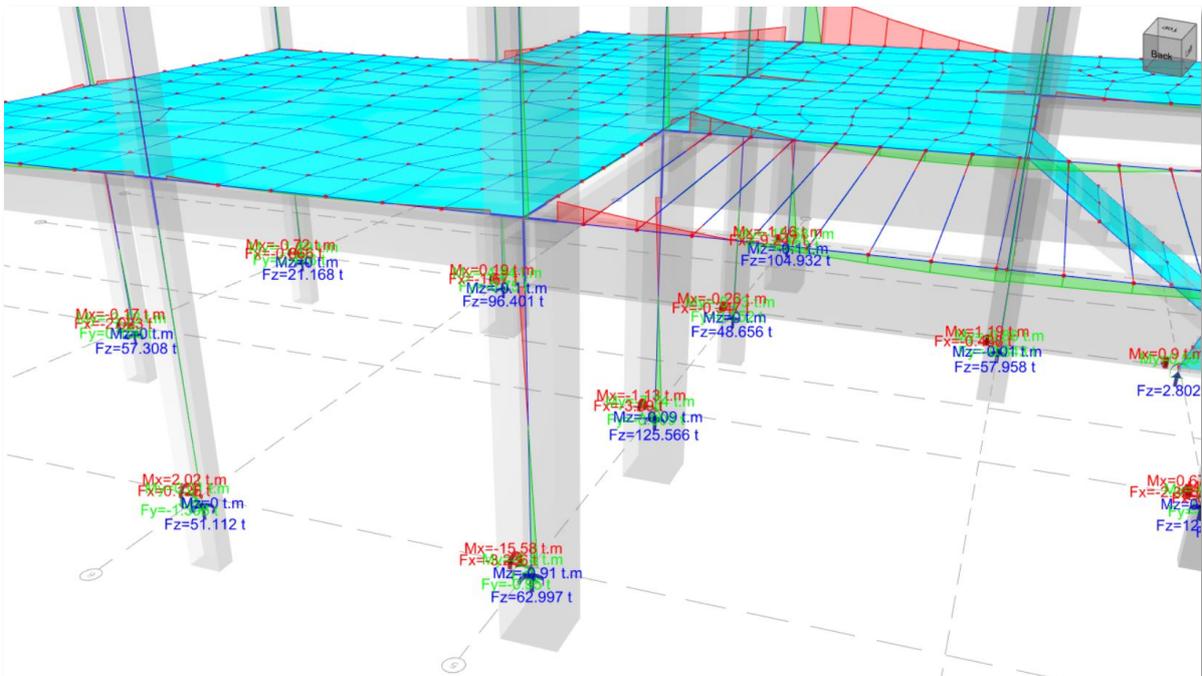


## Contour Labels in Analysis Post-Processor

To improve clarity in contour presentation of shell stresses, displacements and forces, we can now display the contour labels on the contour lines in analysis post-processor. You can turn on the contour label display using the **Contours > Display Values on Lines** option on ribbon bar.

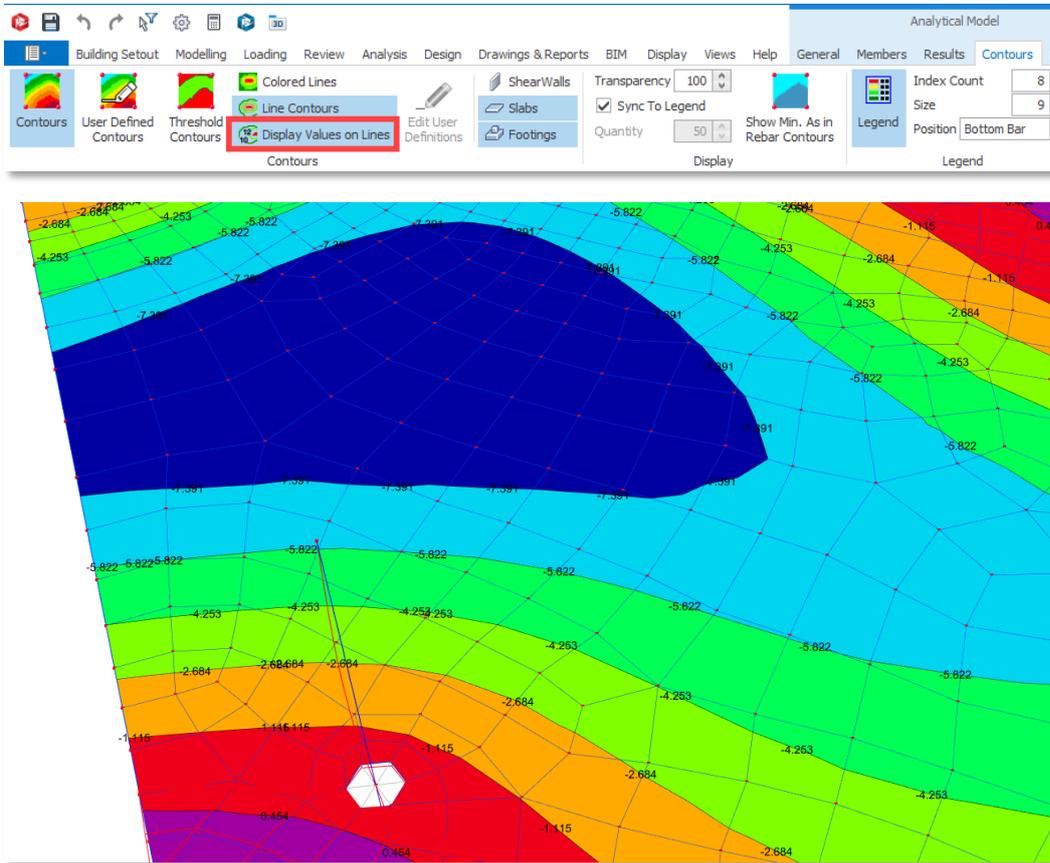


## Contour Legend at the Bottom in Analysis Post-Processor

A new placement option for FE contours is introduced in ProtaStructure 2026. The legend can be placed horizontally at the bottom of the screen to preserve more space and to provide better presentation. The new placement can be adjusted using the **Contours > Legend > Position** option on the ribbon bar.

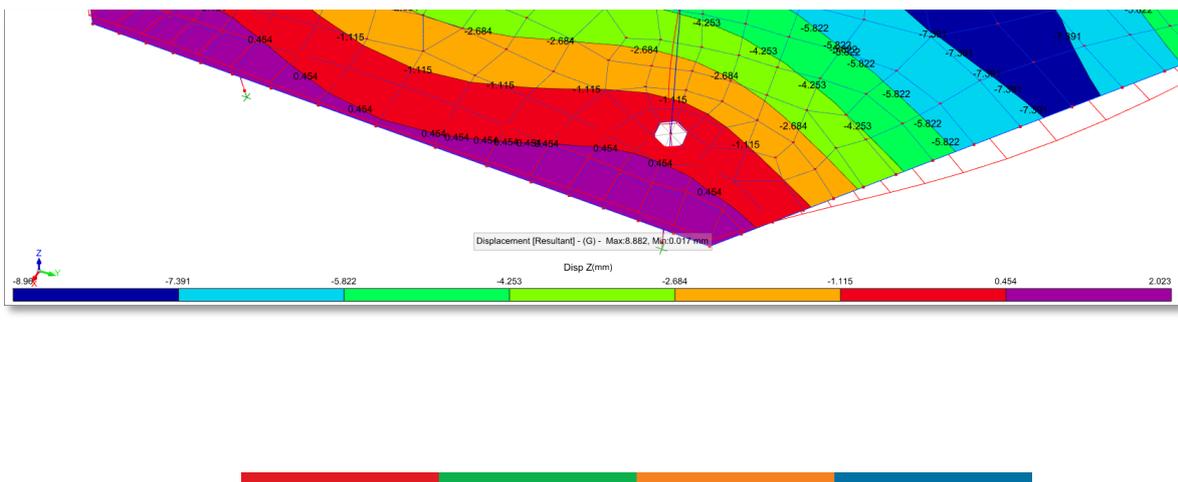

## Exclusive Default Materials for Steel Members

With every new version, we strive to develop more efficiency and intuition into ProtaStructure. The "Frame Members" entity is now removed from material library. Instead, the material system will make use of the frame member types to identify the default materials. In addition to this, default materials for welds, bolts and plates are added for base plate design.

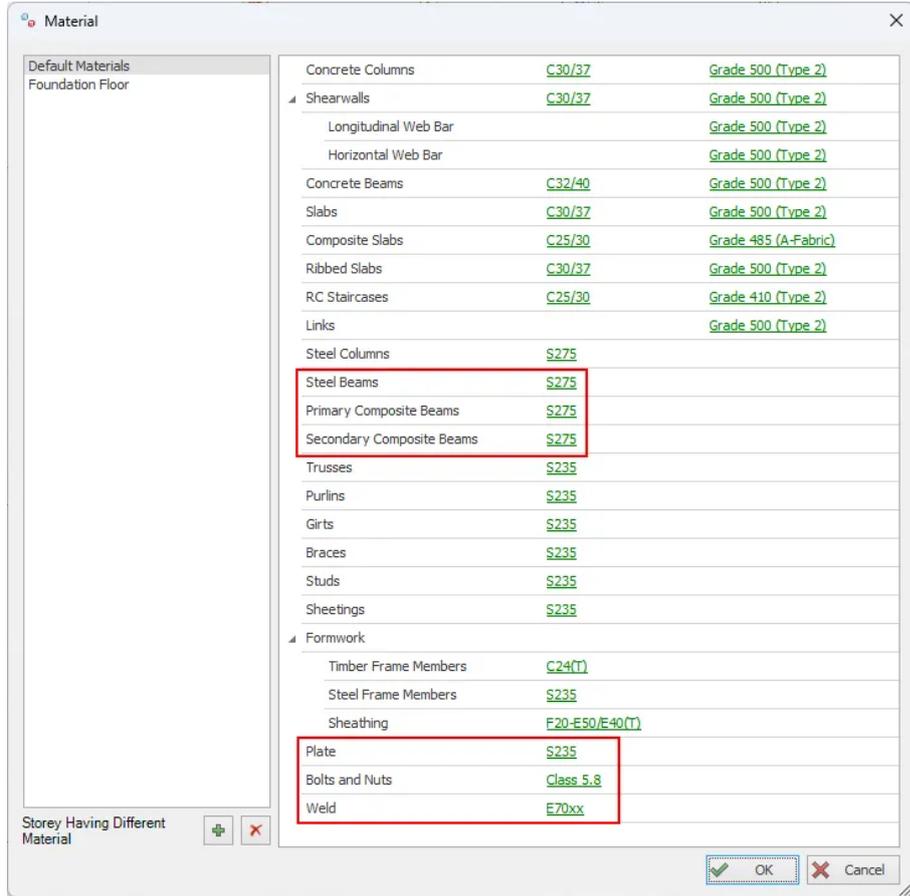

Class 5.8 Bolts and Nuts

Label	Diameter (cm)	Shear Area (m2)	Type	Coating	nn1	nn2	nw1	nw2	tn (cm)	e (cm)	s (cm)	dw (cm)	tw (cm)
M8	0.8	3.72208E-05	Hexagon Head Bolt	Galvanized	0	1	0	1	0.68	1.438	1.3	1.6	0.26
M10	1	5.87998E-05	Hexagon Head Bolt	Galvanized	0	1	0	1	0.84	1.777	1.6	2	0.32
M12	1.2	8.43E-05	Hexagon Head Bolt	Galvanized	0	1	0	1	1.08	2.003	1.8	2.4	0.36
M14	1.4	0.0001175362	Hexagon Head Bolt	Galvanized	0	1	0	1	1.28	2.336	2.1	2.8	0.42
M16	1.6	0.000157	Hexagon Head Bolt	Galvanized	0	1	0	1	1.48	2.675	2.4	3.2	0.48
M18	1.8	0.0001970438	Hexagon Head Bolt	Galvanized	0	1	0	1	1.58	2.956	2.7	3.6	0.54
M20	2	0.000245	Hexagon Head Bolt	Galvanized	0	1	0	1	1.8	3.295	3	4	0.6
M22	2.2	0.0002973226	Hexagon Head Bolt	Galvanized	0	1	0	1	1.94	3.729	3.4	4.4	0.68
M24	2.4	0.000353	Hexagon Head Bolt	Galvanized	0	1	0	1	2.15	3.955	3.6	4.8	0.72
M27	2.7	0.0004518806	Hexagon Head Bolt	Galvanized	0	1	0	1	2.38	4.52	4.1	5.4	0.82
M30	3	0.000561	Hexagon Head Bolt	Galvanized	0	1	0	1	2.56	5.085	4.6	6	0.92
M33	3.3	0.0006801908	Hexagon Head Bolt	Galvanized	0	1	0	1	2.87	5.537	5	6.6	1
M36	3.6	0.0008118716	Hexagon Head Bolt	Galvanized	0	1	0	1	3.1	6.079	5.5	7.2	1.1
M39	3.9	0.0009552362	Hexagon Head Bolt	Galvanized	0	1	0	1	3.34	6.644	6	7.8	1.2
M42	4.2	0.001110284	Hexagon Head Bolt	Galvanized	0	1	0	1	3.4	7.13	6.5	8.4	1.3
M45	4.5	0.001277017	Hexagon Head Bolt	Galvanized	0	1	0	1	3.6	7.695	7	9	1.4
M48	4.8	0.001455433	Hexagon Head Bolt	Galvanized	0	1	0	1	3.8	8.26	7.5	9.6	1.5
M52	5.2	0.001711496	Hexagon Head Bolt	Galvanized	0	1	0	1	4.2	8.825	8	10.4	1.6
M56	5.6	0.00198833	Hexagon Head Bolt	Galvanized	0	1	0	1	4.5	9.256	8.5	11.2	1.7
M60	6	0.002285935	Hexagon Head Bolt	Galvanized	0	1	0	1	4.8	9.921	9	12	1.8
M64	6.4	0.002604311	Hexagon Head Bolt	Galvanized	0	1	0	1	5.1	10.486	9.5	12.8	1.9

# New Metal Deck Types in Library

This feature was not a part of the initial ProtaStructure 2025 release, and it was released with 8.0.217 maintenance package. It is included here for our users who may not be aware of this feature. Feel free to skip this title if you are already familiar with this feature.

RUUKKI metal deck types are now available in Metal Deck library when Poland template is selected.

**Apkrovas laikančių lakštų pasiūlymas**

Produktai	Aprašymas
 <p>→ Kompozitinis lakštas CS48-36-750</p>	<ul style="list-style-type: none"> <li>&gt; Aukštis: 48 mm</li> <li>&gt; Plotis: 750 mm</li> </ul>
 <p>→ Apkrovas laikantys arkiniai lakštai T45-30L-905</p>	<ul style="list-style-type: none"> <li>&gt; Aukštis: 45 mm</li> <li>&gt; Plotis: 905 mm</li> </ul>
 <p>→ Apkrovas laikantys lakštai T153-40L-840</p>	<ul style="list-style-type: none"> <li>&gt; Aukštis: 153 mm</li> <li>&gt; Plotis: 840 mm</li> <li>&gt; Aukščiausiam akustikos lygiui galima rinktis paklotą su perforuotomis šoninėmis ir viršutine plokštumomis</li> </ul>
 <p>→ Apkrovas laikantys lakštai T130M-75L-930</p>	<ul style="list-style-type: none"> <li>&gt; Aukštis: 130 mm</li> <li>&gt; Plotis: 930 mm</li> </ul>

Sheeting Library


Sheeting Panels

- BH-36
- BHN-36R
- NH-32
- RUUKKI CS48-36-750 0.7
- RUUKKI CS48-36-750 0.9
- RUUKKI CS48-36-750 1.1
- RUUKKI T45-30L-905 0.7
- RUUKKI T45-30L-905 0.9
- RUUKKI T153-40L-840 0.7
- RUUKKI T153-40L-840 0.8
- RUUKKI T153-40L-840 0.9
- RUUKKI T153-40L-840 1.0
- RUUKKI T153-40L-840 1.2
- RUUKKI T153-40L-840 1.5

Panel Properties

Material: S355 Label: RUUKKI T45-30L-905 0.9

Total Height (h)	44.0 mm	Bottom Opening Width (Wbw)	90.8 mm
Panel Thickness	0.9 mm	Top Rib Quantity	6
Top Rib Width (Wt)	30.0 mm	Bottom Rib Width (Wb)	60.0 mm
Rib Height (hr)	44.0 mm	Rib Angle	60.005 °
Top Ridge Count (1...2)	1	Bottom Ridge Count (1...3)	1
Top Ridge Width (Wrt)	0.0 mm	Bottom Ridge Width (Wrb)	3.0 mm
Top Ridge Height (hrt)	0.0 mm	Bottom Ridge Height (hrb)	3.0 mm
Top Ridge Angle	0.0 °	Bottom Ridge Angle	60.0 °
Average Rib Width (Wr)	60.4 mm	Sr	0.0 mm
Side Crank Count (0...2)	1	Side Crank Angle	0.0 °
Side Crank Length	5.0 mm		

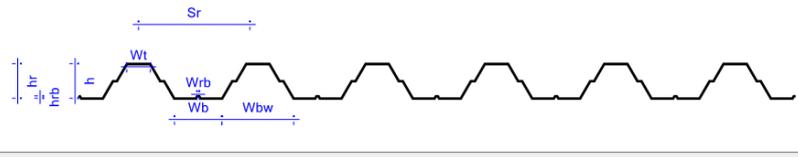



## Extended Cold-Formed Section Library

The cold-formed profile catalog in ProtaStructure was extended to support face-to-face and back-to-back C-shaped sections.

Frame Member Cold Formed (2xLOGC150x2-Gr1FF)

Database Project

Cold Formed

Database

Custom

- U-BRAZIL
- CWL
- CWL-THAI
- LOGC
- UE-BRAZIL
- CWL+
- SIGMA
- SIGMA+
- ZWL
- LOGZ
- C

General Properties

Section Name: 2xLOGC150x2-Gr1FF Section Color: 219, 229, 2...

Edit Section Label

H	15.00 cm
B1	6.50 cm
B2	6.50 cm
t	0.20 cm
L	1.60 cm
R1	0.00 cm
R2	0.00 cm
$\alpha 1$	0.00 cm
$\alpha 2$	0.00 cm
$\beta 1$	0.00 cm
$\beta 2$	0.00 cm

Hide Labels

Section Angle: 0

Mirror About: X-X  Y-Y

Materials

Profile: [Default]


Reset to Defaults

Connection Type: Welded

Distance Between Sections in X Direction: 1.00 cm



Cold-formed profiles can be used in the model and member results are obtained as a part of the FE analysis. Design of cold-formed sections are not available yet.

OK Cancel

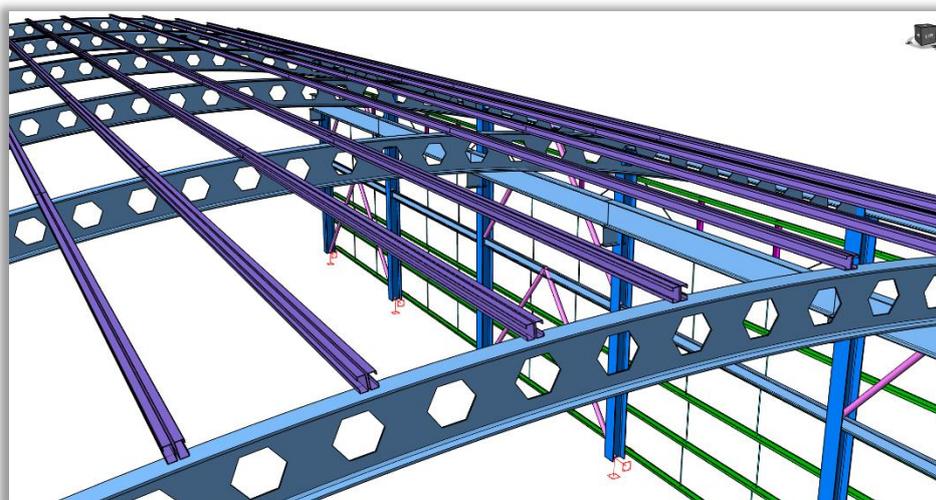

## Utilization Ratio Coloring for RC Members

ProtaStructure is famous for interactive and automated design of RC, steel and composite members (composite metal decks). As a result of the design, each member will have governing design utilization ratios. With the help of the powerful visual interrogation feature, you can color-code the utilization ratios based on their severity levels. Previously, only steel members were color-coded. With the latest version RC members are included.

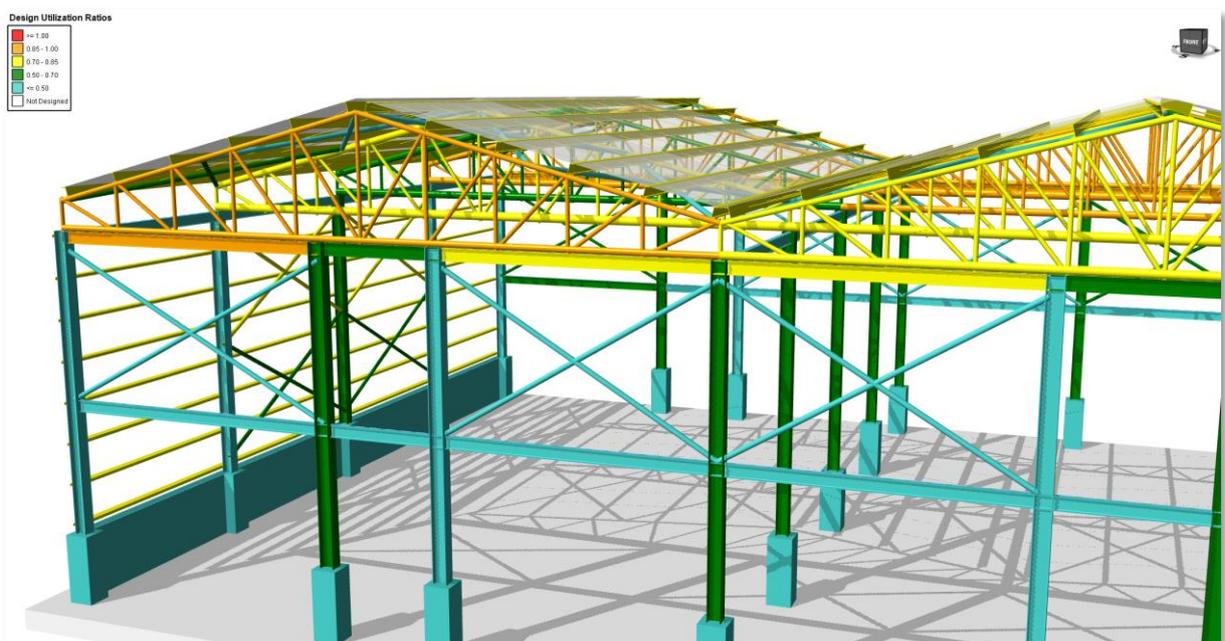
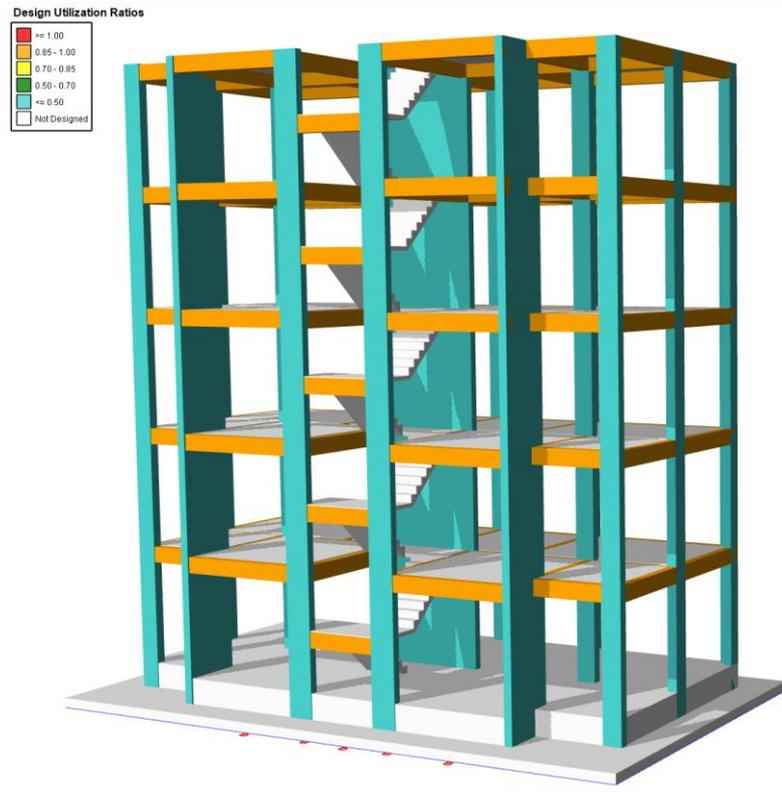


## Color Assignment to Loads

ProtaStructure 2026 introduces a highly versatile feature that empowers users to assign unique colors to various load categories, including **Self Weight**, **Additional Loads**, **FE Loads**, **Parapet Loads**, **Compensation/Correction Loads**, and **Composite Construction Stage Loads**. This functionality enhances visual clarity, allowing for easier distinction and management of different load types within structural models.

Furthermore, users can assign custom colors to individual loads, independent of their assigned category, offering additional flexibility and personalization during the design process. Importantly, if an individually colored load is deleted or recalculated, its color will automatically reset and revert to the default color of its category, ensuring consistency and eliminating potential discrepancies in load visualization. By improving the visual organization of load data, this feature not only reduces potential errors but also streamlines the analysis and review process, significantly improving overall design efficiency and accuracy.

This feature is active by default. You can customize the colors for the load categories from **Options > Load Editor Settings > Category Colors**.

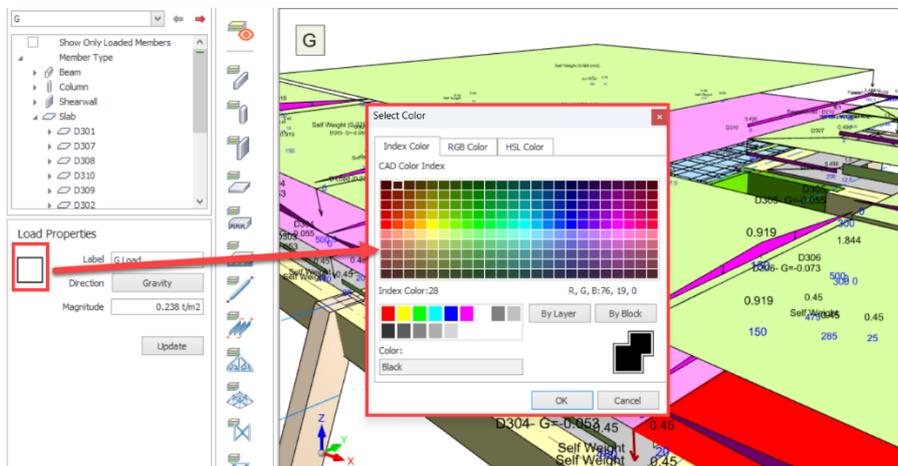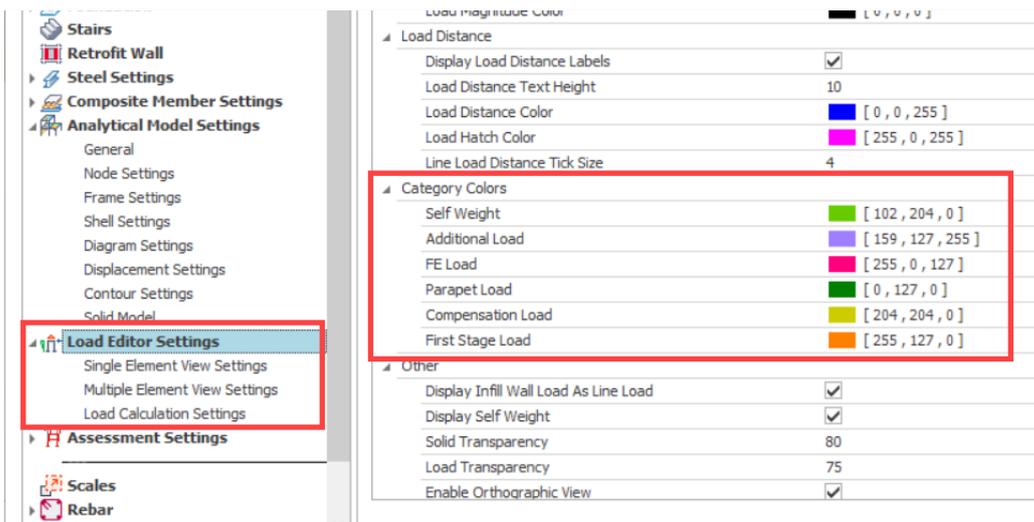


Changing the individual load colors.




## Enhancements in Member Relabeling

Member relabeling was extended to cover more member types including axes, steel frames, trusses, space trusses and so on. In addition to this, relabeling algorithm was enhanced for more robustness and flexibility.

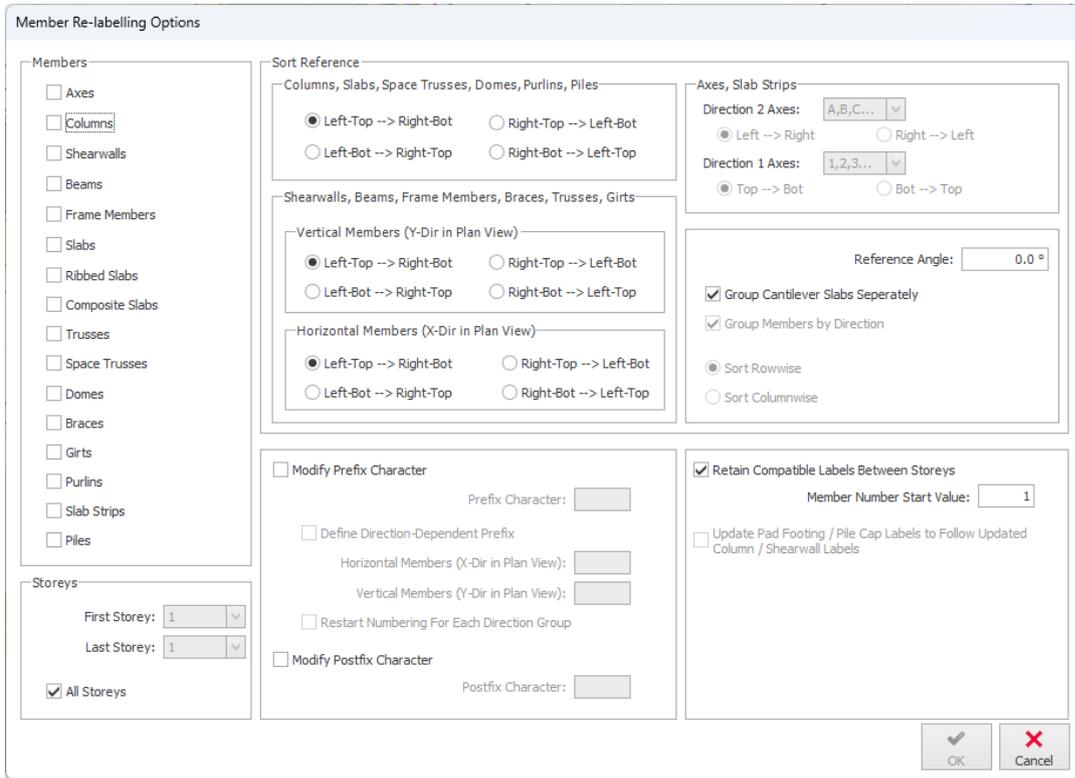

## View Modes in Right-Click Menu

3D view display modes are now accessible via **Right Click > View** menu. View type can also be changed by hitting CTRL+D keyboard shortcut consecutively. This shortcut can be customized using the **Shortcut Editor**, which was again introduced with ProtaStructure 2026.

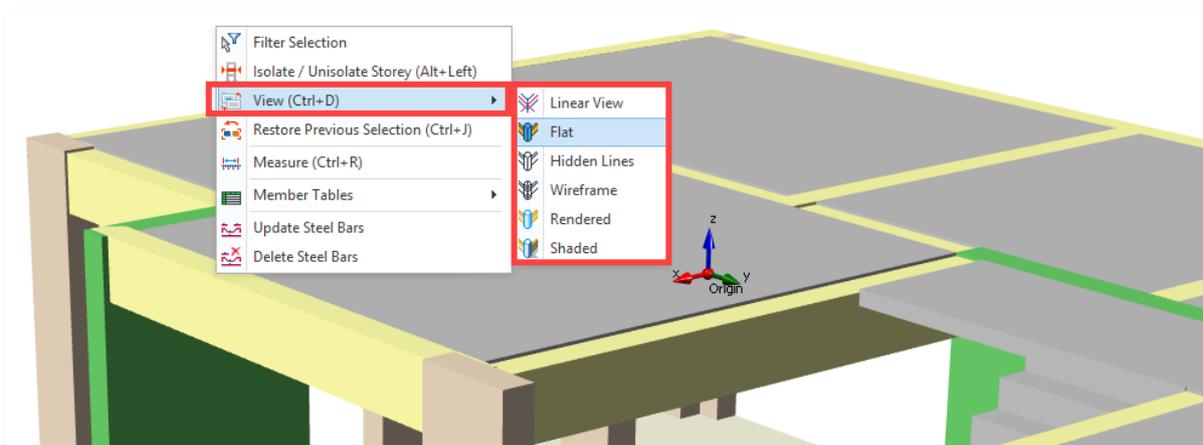




## Number of Studs and Camber in Frame Labels

This feature was not a part of the initial ProtaStructure 2025 release, and it was released with 8.0.217 maintenance package. It is included here for our users who may not be aware of this feature. Feel free to skip this title if you are already familiar with this feature.

ProtaStructure is now able to append the “Number of Studs” and “Camber” information to the composite frame labels when you design composite slabs in your model. This information is also visible in ProtaDetails floor plan drawings.

To enable the display of stud and camber information:

1. Navigate to Settings > Label
2. Check “Display Composite Beam Stud Quantity” and “Display Composite Beam Camber Value” options.

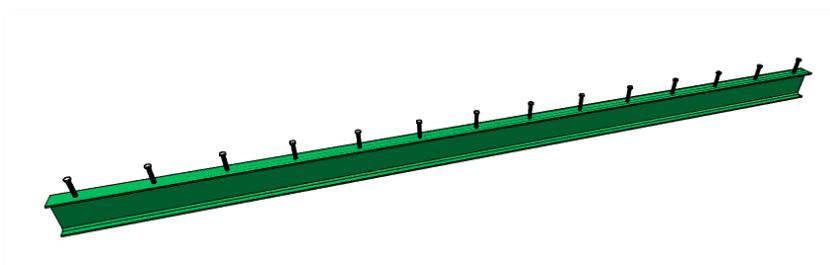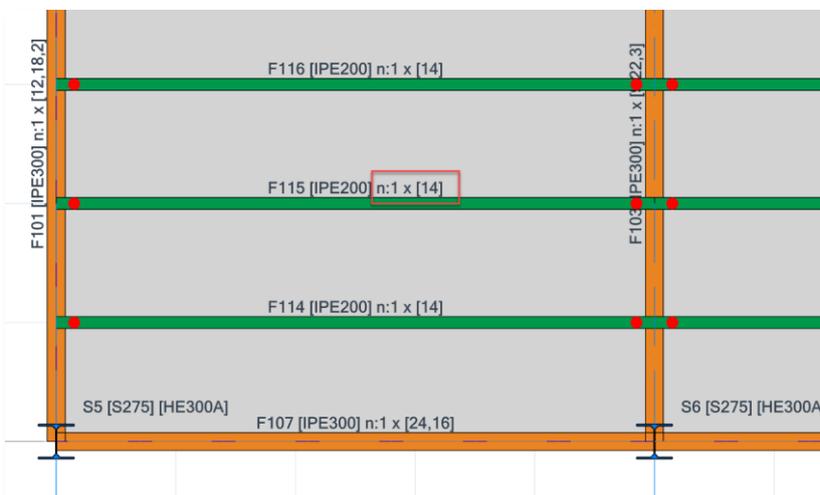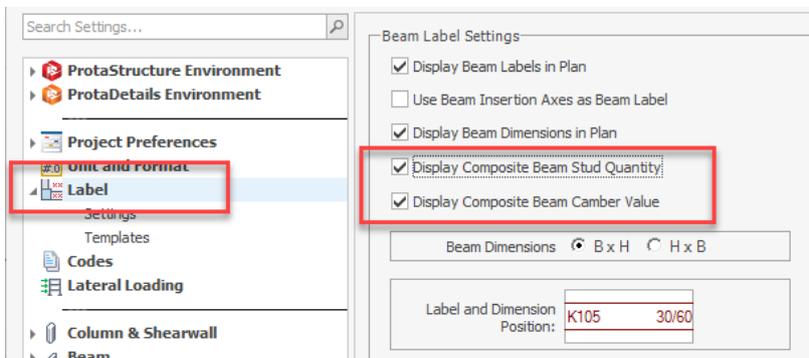

## Support Assignment and Cantilever Frame Members

This feature was not a part of the initial ProtaStructure 2025 release, and it was released with 8.0.217 maintenance package. It is included here for our users who may not be aware of this feature. Feel free to skip this title if you are already familiar with this feature.

**Support (Restraint)** assignment and **Free-End Specifications** are now moved to 'General' tab on the **Frame Properties** window for easier access.

In addition to this, frame free ends will not be automatically determined by ProtaStructure anymore. It has been evident from various user models and scenarios that automated determination causes modeling and design confusions since frame members have a wide range of flexible usage options and scenarios.

### Important


Frame member free ends (cantilever ends) will not be automatically set by ProtaStructure, anymore. Although analytically having no effect in analysis results, the free ends play an important role in **steel deflection checks**. It is important that you set them manually for cantilever frame members.

ProtaStructure will not allow you to designate member ends as free, if there are columns or walls connected at a particular end.

If one of the member ends is not connected to any column or wall and if you want to designate it as 'Cantilever' you have two options:


### Alternative 1:

1. Select the member
2. Pick the **Mark Free End of Cantilever Beam** command on the Right Click menu.
3. Select one of 'I End Free' or 'J End Free' options.

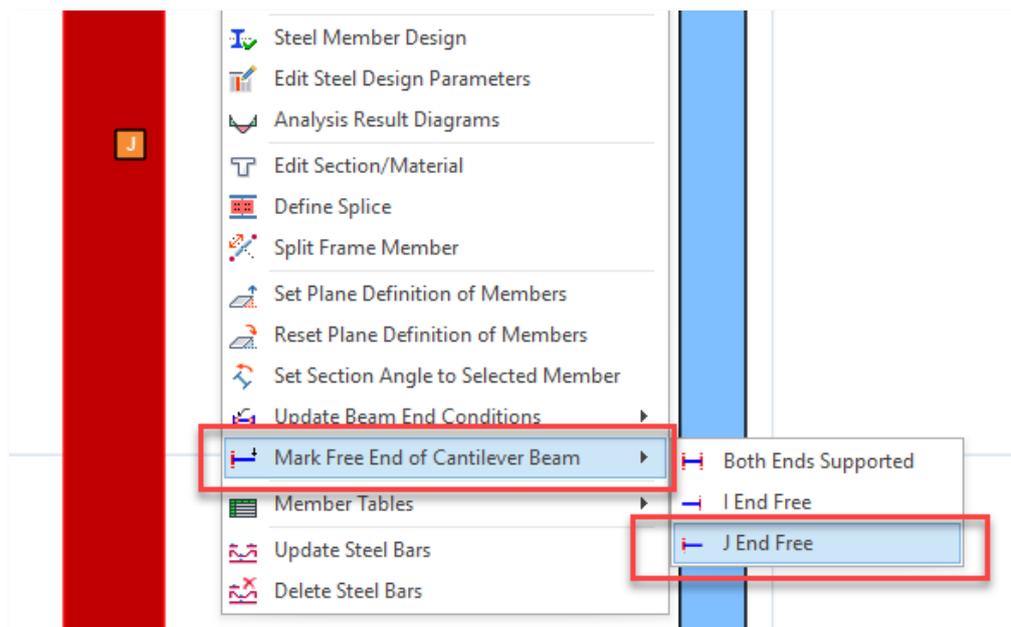


**Alternative 2:**

1. Select the member and open the Properties window.
2. Check one of 'I End Free' or 'J End Free' options under General tab.
3. These options will be disabled if columns or walls are connected to the member ends.

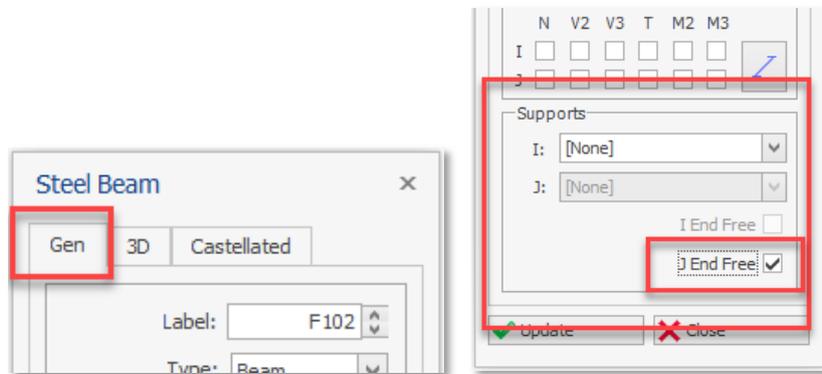

## Optimized Ribbon and Right Click Menu

The ribbon menu, contextual menus, and right-click menus have been optimized, and commands have been streamlined for smoother usage.

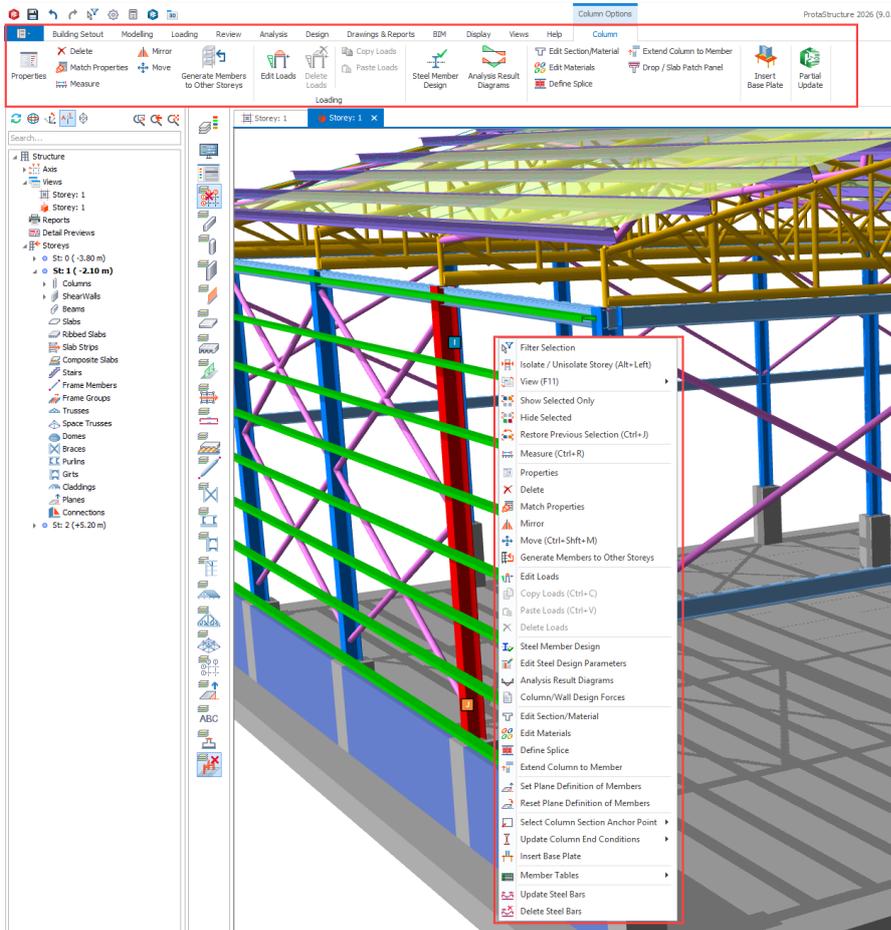

## Frame Member Storey Assignment


This feature was not a part of the initial ProtaStructure 2025 release, and it was released with 8.0.217 maintenance package. It is included here for our users who may not be aware of this feature. Feel free to skip this title if you are already familiar with this feature.

Structural members in ProtaStructure are assigned to storeys for easy manipulation, mass and load calculation. However, with the introduction of general-purpose frame members, the models created with ProtaStructure are getting more and more sophisticated, thanks to our creative users and our development team.

When you insert a frame member, ProtaStructure will automatically assign the closest storey to the member. To provide flexibility to our users, we have added a new setting for frame member storey assignment with the latest update.


1. Navigate to **Settings > ProtaStructure Environment > Storey Assignment Method**
2. Select **“Assign the first storey with greater Z-coordinate”** or **“Assign the storey with the closest Z-coordinate”** option.

The frame members’ I and J end z-coordinates are checked against the storey z coordinates. If you select the **“Assign the first storey with greater Z-coordinate”** option, the first storey whose z coordinate is greater than the member end coordinate is assigned to that end of the member. If you select the **“Assign the storey with the closest Z-coordinate”** option, always the closest storey is assigned.

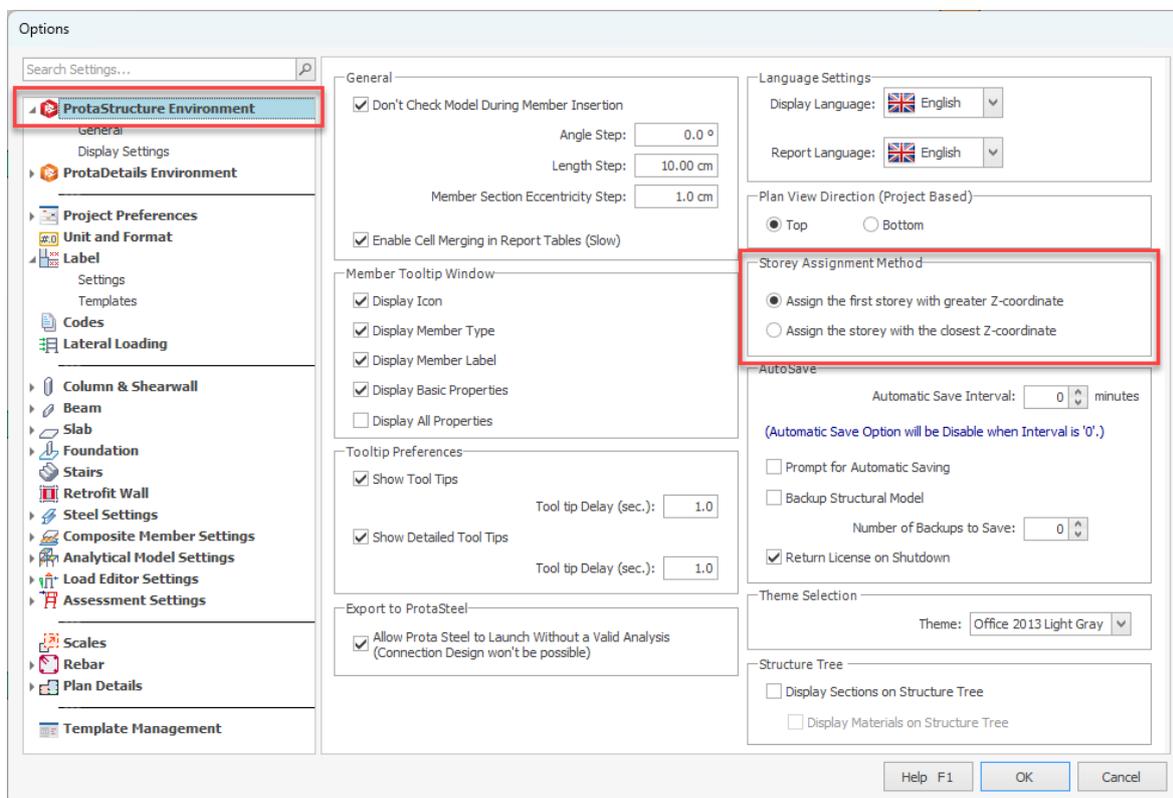


## Search by Labels in Analysis Post-Processor

You can now interrogate the analytical model by physical member labels to pinpoint the analytical representation of a physical member.

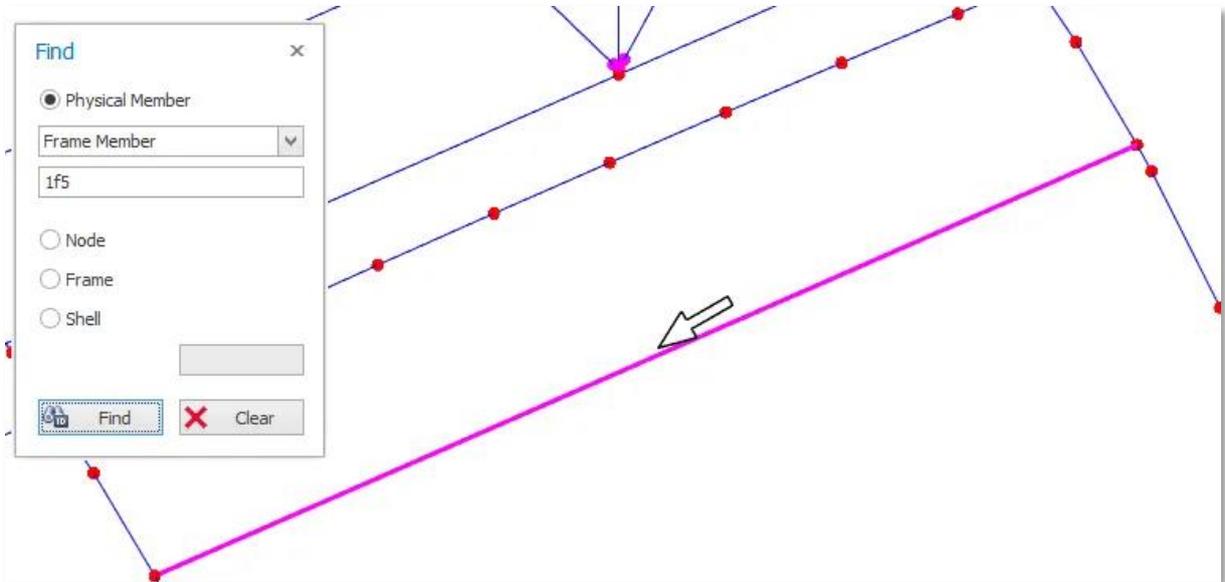

## Section and Material Labels in Analysis Post-Processor

The labels shown on analytical lines and shell elements are appended with physical material and section names for easier review. Previously, analytical material and section IDs were displayed which had less practical use.

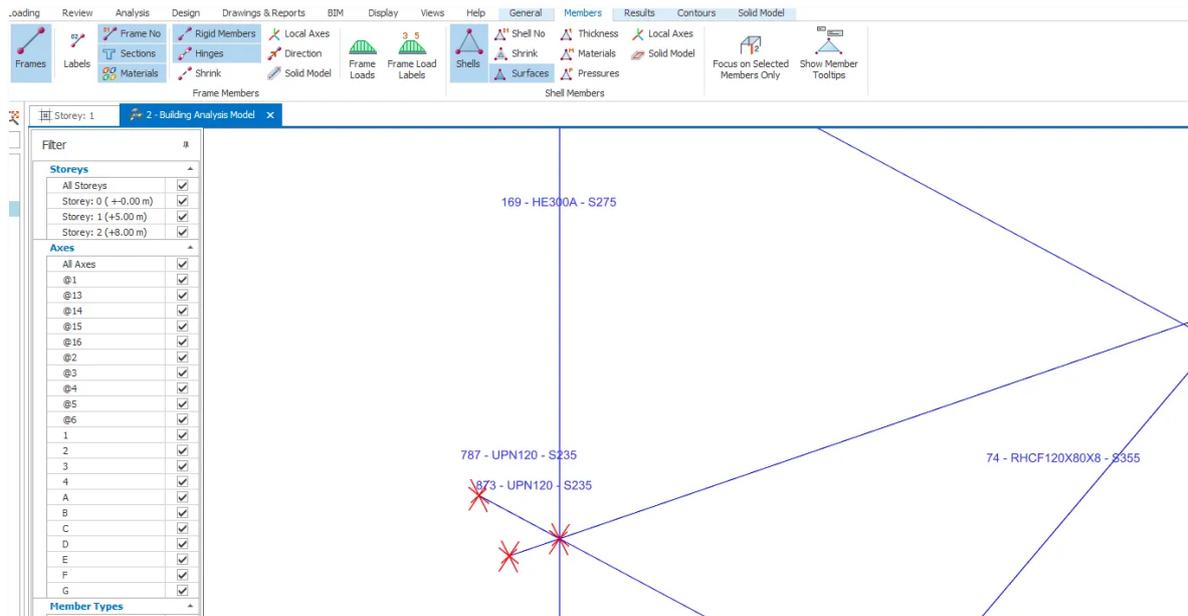

# Advanced BIM Integration




## Support for IFC4 Format

This feature was not a part of the initial ProtaStructure 2025 release, and it was released with 8.0.217 maintenance package. It is included here for our users who may not be aware of this feature. Feel free to skip this title if you are already familiar with this feature.

IFC4 (Industry Foundation Classes version 4) plays a crucial role in the construction industry by enhancing data interoperability and standardization. It addresses many limitations of its predecessor, IFC2x3, by supporting more complex geometries, such as b-spline surfaces and curves, which improves the performance of models with curved elements. IFC4 also facilitates better energy calculations and advanced simulations, making it easier to integrate sustainability considerations into building designs. Additionally, it enhances BIM (Building Information Modeling) to GIS (Geographic Information Systems) interoperability, which is vital for infrastructure projects. Overall, IFC4 promotes a more seamless exchange of information across different software platforms, improving collaboration and efficiency in construction projects.

At Prota Software, we are dedicated to integrating the latest BIM support, including IFC4, into our solutions. Our commitment ensures that our users benefit from seamless information exchange, improved collaboration, and increased efficiency in their construction projects.

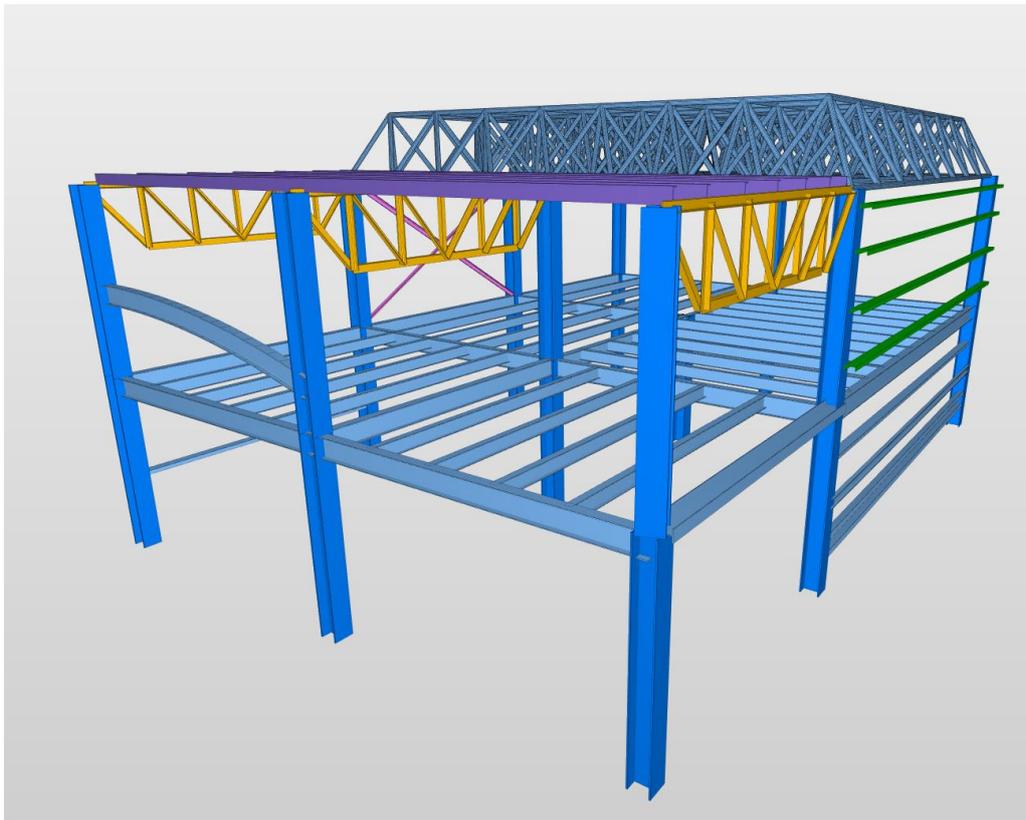

*A view of IFC4 file exported from ProtaStructure. IFC4 provides better support for curved members and provides styling of members with custom colors*



# IFC-Singapore Template

ProtaStructure 2026 now supports IFC-SG (Singapore) template, enhancing its capabilities in Building Information Modeling (BIM). The IFC-SG template support is particularly crucial for digital BIM project submissions as a part of the CoreNetX project by BCA, ensuring compliance with local standards and carbon footprint reduction. Additionally, IFC4 offers greater flexibility in coordination, allowing for more efficient and accurate data exchange between different software platforms. This dual support empowers engineers to streamline their workflows and achieve higher precision in their projects.

## Export Internal Forces to IdeaStatica

In our previous version, we introduced the IdeaStatica export feature, which received great feedback from our users. In this version, we have enhanced it further by allowing users to export the internal forces acting on the connections to IdeaStatica in a tabular format.

The screenshot displays the ProtaStructure 2026 software interface. A dialog box titled "Import of load effects" is open, showing a table of load effects for various members and positions. A red arrow points from this dialog box to an Excel spreadsheet that contains the detailed internal force data for each member and position.

Name	Member	Position	N [kN]	Vy [kN]	Vz [kN]	Mx [kNm]	My [kNm]	Mz [kNm]
LE1	M182	Begin	0.0	0.0	0.0	0.0	-0.7	-0.8
	M203	End	0.0	0.0	0.0	0.0	1.0	0.0
	M197	End	0.0	0.0	0.0	0.0	0.9	0.0
LE2	M182	Begin	0.0	0.0	0.0	0.0	-0.7	-0.8
	M203	End	0.0	0.0	0.0	0.0	0.0	0.0
	M197	End	0.0	0.0	0.0	0.0	0.0	0.0
LE3	M182	Begin	0.0	0.0	0.0	0.0	0.0	0.0
	M203	End	0.0	0.0	0.0	0.0	0.0	0.0
	M197	End	0.0	0.0	0.0	0.0	0.0	0.0
LE4	M182	Begin	0.0	0.0	0.0	0.0	0.0	0.0
	M203	End	0.0	0.0	0.0	0.0	0.0	0.0
	M197	End	0.0	0.0	0.0	0.0	0.0	0.0
LE5	M182	Begin	0.0	0.0	0.0	0.0	0.0	0.0
	M203	End	0.0	0.0	0.0	0.0	0.0	0.0
	M197	End	0.0	0.0	0.0	0.0	0.0	0.0


Load	Beam	Position	N[kN]	Vy[kN]	Vz[kN]	Mz[kNm]	My[kNm]	Mx[kNm]
1	1.2G+1.6Q	M182 Begin	-0.002956	0.000424	-0.000448	0	-0.735747	-0.831715
2	1.2G+1.6Q	M203 End	-0.000448	0.001267	0	0	0.965893	0
3	1.2G+1.6Q	M197 End	-0.000425	0.001267	0	0	0.863224	0
4	1.2G+1.6Q	M182 Begin	-0.002956	0.000424	-0.000448	0	-0.735747	-0.831715
5	1.2G+1.6Q	M203 End	-0.000448	0.001267	0	0	0.965893	0
6	1.2G+1.6Q	M197 End	-0.000425	0.001267	0	0	0.863224	0
7	1.2G+1.6Q	M182 Begin	-0.002956	0.000424	-0.000448	0	-0.735747	-0.831715
8	1.2G+1.6Q	M203 End	-0.000448	0.001267	0	0	0.965893	0
9	1.2G+1.6Q	M197 End	-0.000425	0.001267	0	0	0.863224	0
10	1.2G+1.6Q	M182 Begin	-0.002956	0.000424	-0.000448	0	-0.735747	-0.831715
11	1.2G+1.6Q	M203 End	-0.000448	0.001267	0	0	0.965893	0
12	1.2G+1.6Q	M197 End	-0.000425	0.001267	0	0	0.863224	0
13	1.2G+1.6Q	M182 Begin	-0.002956	0.000424	-0.000448	0	-0.735747	-0.831715
14	1.2G+1.6Q	M203 End	-0.000448	0.001267	0	0	0.965893	0
15	1.2G+1.6Q	M197 End	-0.000425	0.001267	0	0	0.863224	0
16	1.2G+1.6Q	M182 Begin	-0.002956	0.000424	-0.000448	0	-0.735747	-0.831715
17	1.2G+1.6Q	M203 End	-0.000448	0.001267	0	0	0.965893	0
18	1.2G+1.6Q	M197 End	-0.000425	0.001267	0	0	0.863224	0
19	1.2G+1.6Q	M182 Begin	-0.002956	0.000424	-0.000448	0	-0.735747	-0.831715
20	1.2G+1.6Q	M203 End	-0.000448	0.001267	0	0	0.965893	0
21	1.2G+1.6Q	M197 End	-0.000425	0.001267	0	0	0.863224	0
22	1.2G+1.6Q	M182 Begin	-0.002956	0.000424	-0.000448	0	-0.735747	-0.831715
23	1.2G+1.6Q	M203 End	-0.000448	0.001267	0	0	0.965893	0
24	1.2G+1.6Q	M197 End	-0.000425	0.001267	0	0	0.863224	0
25	1.2G+1.6Q	M182 Begin	-0.002956	0.000424	-0.000448	0	-0.735747	-0.831715
26	1.2G+1.6Q	M203 End	-0.000448	0.001267	0	0	0.965893	0
27	1.2G+1.6Q	M197 End	-0.000425	0.001267	0	0	0.863224	0
28	1.2G+1.6Q	M182 Begin	-0.002956	0.000424	-0.000448	0	-0.735747	-0.831715
29	1.2G+1.6Q	M203 End	-0.000448	0.001267	0	0	0.965893	0
30	1.2G+1.6Q	M197 End	-0.000425	0.001267	0	0	0.863224	0

# Steel Material Lists in ProtaStructure

ProtaSteel already provides a detailed material list and quantity take-off using the fully connected and non-clashing fabrication model. However, our users also requested steel material lists to be extracted from ProtaStructure models. This is now possible with ProtaStructure 2026.

To obtain the steel material lists in ProtaStructure:

1. Click **Drawings&Reports > Quantity Extraction Tables** ribbon button.
2. Previously, only Concrete and Formwork quantities were available. Now, you will see additional options for **Steel members, Metal Decks in Composite slabs** and **Shear studs**.
3. Pick the **Steel** option for getting the lengths and weights of steel profiles used in the project.

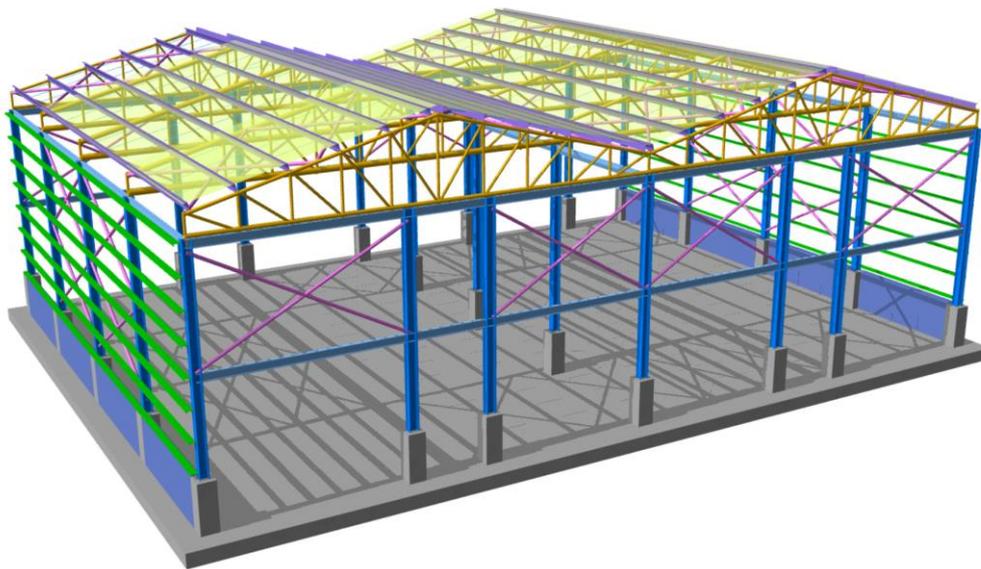

## Steel Quantity Take-off

### Summary Table

Storey	Total Weight (t)
2	71.72
<b>All Storeys Total</b>	<b>71.72</b>

### Storey Tables

Storey: 2

Section	Material	Total Length (m)	
CHS 114 3x6	S235	514.00568	
CHS 139 7x6	S235	31.4	
CHS 139 7x8	S235	48.67956	
CHS 168 3x6	S235	15.7	
CHS 177 8x10	S235	24.33978	
CHS 177 8x12	S235	8.11326	
CHS 177 8x8	S235	15.7	
CHS 193 7x12 5	S235	8.11326	
CHS 193 7x8	S235	15.7	
CHS 219 1x5	S235	8.11326	
CHS 219 1x8	S235	62.8	
CHS 244 5x5	S235	15.7	
CHS 88 9x6	S235	410.97537	
D12	S235	21.77658	
D14	S235	21.77658	
HE300A	S275	116.8	
HE340A	S275	58.4	6.119
IPE240	S275	0.05	0.002
IPE270	S275	195.80002	7.062
UPN200	S235	374.4	9.613
UPN220	S235	561.6	16.77
<b>Total</b>			<b>71.72</b>

Quantity Extraction Tables ✕

Concrete Quantity Extractions Table  
 Formwork Quantity Table  
 **Steel Quantity Extractions Table**  
 Sheeting Quantity Extractions Table  
 Shear Stud Quantity Extractions Table

? Help F1
Calculate



**Remark:**


In ProtaStructure, steel models do not include connections (except for base plates). Members are connected at the structural nodes, which means the member lengths might not be as accurate as in ProtaSteel, where all connections are precisely inserted, and member adjustments are made to avoid clashes. As a result, the steel material lists in ProtaStructure provide only a rough estimate for cost calculations.

## Filtering and Post-processing Analysis Results

ProtaStructure 2026 introduces an improved analysis result filtering and postprocessing feature, enabling engineers to efficiently extract maximum forces among combinations and obtain amplified results due to seismic analysis and results with live load reduction. This enhancement streamlines the workflow, allowing for more precise and targeted evaluations, ultimately leading to optimized structural designs and improved project outcomes.

### Results for All Member Types

All member types are now available for result extraction in the **Structural Members** category.

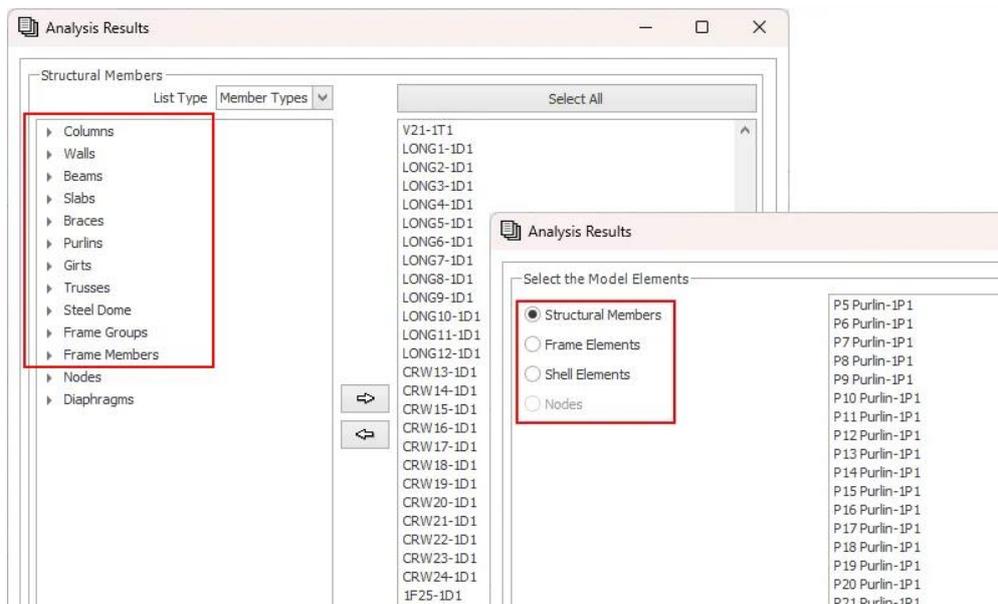


### Automatically Extract Maximum Effects

Now, you can extract the combinations with maximum effects. To achieve this:

1. Check “**Display Combination Results with Maximum Effects Only**” option and create the report.
2. ProtaStructure will automatically do the post-processing and report the positive and negative maximum effects with their corresponding load combinations.



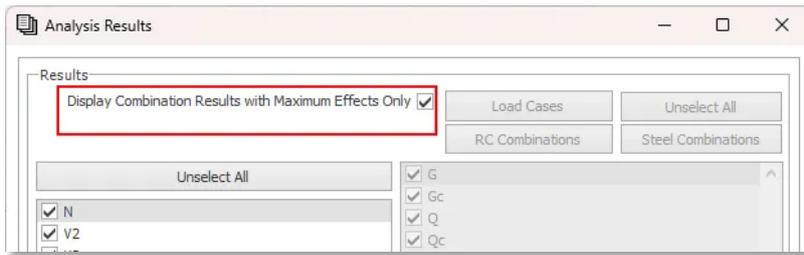


Note that this feature filters distinct results. If the maximum axial and shear results come from the same combination, then this combination is displayed only once saving you time and space.

74	Member	Load	Type	N - i	V2 - i	V3 - i	M22 - i	M33 - i	T - i	N - j	V2 - j	V3 - j	M22 - j	M33 - j	T - j
75	1C39 Storey - 1	[32] G+Q+Hx	Column	-226.967	-9.49	4.0518	11.608	-27.4756	0.0048	-245.951	-9.49	4.0518	-6.625	15.2293	0.0048
76	1C39 Storey - 1	[8] G+Q+Ey++Hy	Column	-127.051	-0.6225	3.1318	8.8121	-1.5997	0.0227	-141.114	-0.6225	3.1318	-5.2808	1.2014	0.0227
77	Member	Load	Type	N - i	V2 - i	V3 - i	M22 - i	M33 - i	T - i	N - j	V2 - j	V3 - j	M22 - j	M33 - j	T - j
78	1C38 Storey - 1	[32] G+Q+Hx	Column	-146.578	-9.374	2.1687	6.2054	-27.2092	0.0048	-165.562	-9.374	2.1687	-3.5539	14.9737	0.0048
79	1C38 Storey - 1	[2] G+Qs1	Column	-93.7918	-2.2749	2.2164	6.3478	-6.5273	0.003	-112.776	-2.2749	2.2164	-3.6261	3.7096	0.003
80	1C38 Storey - 1	[8] G+Q+Ey++Hy	Column	-69.033	-1.5117	1.9173	5.3276	-4.4859	0.0227	-83.0955	-1.5117	1.9173	-3.3001	2.3167	0.0227
81	Member	Load	Type	N - i	V2 - i	V3 - i	M22 - i	M33 - i	T - i	N - j	V2 - j	V3 - j	M22 - j	M33 - j	T - j
82	1C37 Storey - 1	[32] G+Q+Hx	Column	-111.254	-6.5143	-1.1074	-3.1942	-18.9235	0.0048	-130.239	-6.5143	-1.1074	1.7892	10.3907	0.0048
83	1C37 Storey - 1	[2] G+Qs1	Column	-100.396	-4.3525	-1.1373	-3.2745	-12.5012	0.003	-119.38	-4.3525	-1.1373	1.8436	7.0852	0.003
84	1C37 Storey - 1	[8] G+Q+Ey++Hy	Column	-74.7647	-3.2515	-0.6131	-1.9324	-9.3459	0.0227	-88.8272	-3.2515	-0.6131	0.8268	5.286	0.0227
85	1C37 Storey - 1	[9] G+Q-Ey-Hy	Column	-73.9806	-3.2187	-1.0675	-2.9092	-9.1925	-0.0174	-88.0431	-3.2187	-1.0675	1.8945	5.2916	-0.0174
86	Member	Load	Type	N - i	V2 - i	V3 - i	M22 - i	M33 - i	T - i	N - j	V2 - j	V3 - j	M22 - j	M33 - j	T - j
87	1C36 Storey - 1	[2] G+Qs1	Column	-112.04	15.4302	-1.995	-5.7456	44.581	0.003	-131.024	15.4302	-1.995	3.2318	-24.8549	0.003
88	1C36 Storey - 1	[32] G+Q+Hx	Column	-110.596	15.5159	-1.8961	-5.4741	44.6436	0.0048	-129.58	15.5159	-1.8961	3.0584	-25.178	0.0048
89	1C36 Storey - 1	[8] G+Q+Ey++Hy	Column	-86.4344	13.5486	-1.126	-3.4838	39.1302	0.0227	-100.497	13.5486	-1.126	1.5831	-21.8387	0.0227
90	1C36 Storey - 1	[11] G+Q-Ey-Hy	Column	-78.7114	9.0859	-1.8858	-5.1837	26.3107	-0.017	-92.7739	9.0859	-1.8858	3.3026	-14.5758	-0.017
91	Member	Load	Type	N - i	V2 - i	V3 - i	M22 - i	M33 - i	T - i	N - j	V2 - j	V3 - j	M22 - j	M33 - j	T - j
92	1C35 Storey - 1	[2] G+Qs1	Column	-154.268	1.3744	6.9092	19.8066	4.0446	0.003	-173.252	1.3744	6.9092	-11.2848	-2.1401	0.003
93	1C35 Storey - 1	[32] G+Q+Hx	Column	-143.124	3.0884	6.8377	19.5925	8.8189	0.0048	-162.108	3.0884	6.8377	-11.1771	-5.0791	0.0048
94	1C35 Storey - 1	[26] G+Q+WY+Ny	Column	-154.213	1.1875	6.9197	19.8203	3.6344	0.0056	-173.197	1.1875	6.9197	-11.3183	-1.7093	0.0056
95	1C35 Storey - 1	[8] G+Q+Ey++Hy	Column	-114.414	1.0911	5.2628	14.8861	3.3449	0.0227	-128.477	1.0911	5.2628	-8.7963	-1.5653	0.0227
96	Member	Load	Type	N - i	V2 - i	V3 - i	M22 - i	M33 - i	T - i	N - j	V2 - j	V3 - j	M22 - j	M33 - j	T - j
97	1C33 Storey - 1	[29] G+Q-Wy-Ny	Column	-88.6733	0.7816	0.8706	2.4793	2.4007	0.0042	-107.658	0.7816	0.8706	-1.4382	-1.1163	0.0042
98	1C33 Storey - 1	[32] G+Q+Hx	Column	-80.0962	2.4546	0.825	2.3415	6.9215	0.0048	-99.0805	2.4546	0.825	-1.3709	-1.4241	0.0048
99	1C33 Storey - 1	[2] G+Qs1	Column	-77.8964	0.9166	1.2907	3.6864	2.6817	0.003	-96.8808	0.9166	1.2907	-2.1215	-1.4432	0.003
100	1C33 Storey - 1	[8] G+Q+Ey++Hy	Column	-57.0559	0.9116	1.2715	3.4347	2.5063	0.0227	-71.1184	0.9116	1.2715	-2.2869	-1.5957	0.0227
101	1C33 Storey - 1	[10] G+Q-Ey-Hy	Column	-57.1503	0.9485	1.2802	3.4473	2.5168	0.0223	-71.2128	0.9485	1.2802	-2.3137	-1.6513	0.0223

**Note:**  
This option is particularly useful when you want to export only maximum effects to other software, such as IdeaStatica. You don't need to export the results to an excel sheet and run formulas or macros to find the maximum effects.

## Seismic Magnifications and Live Load Reduction

Seismically magnified analysis results and live load reduced combination results can also be automatically extracted as a report. This allows you to get analysis results combined with Diagrams, Analysis Post Processor and the values on the Design UI.


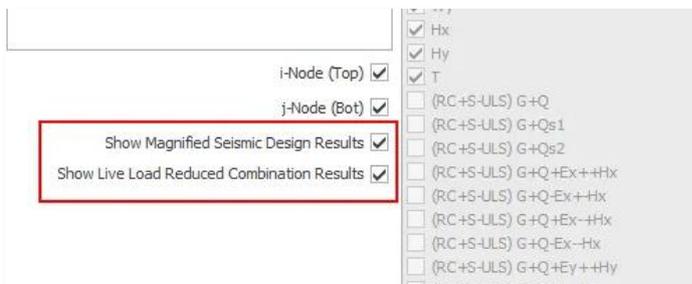


Combination Results with Maximum Effects only is particularly useful when you want to copy the reactions to another software such as IdeaStatica.

## Image Export with Transparent Background

This feature was not a part of the initial ProtaStructure 2025 release, and it was released with 8.0.257 maintenance package. It is included here for our users who may not be aware of this feature. Feel free to skip this title if you are already familiar with this feature.

If you need high-resolution images from your ProtaStructure model, a handy feature is the ability to export poster quality images, thanks to the vectoral graphics engine of ProtaStructure. With the latest version, you can now automatically remove the background while exporting. In this way, your graphics designer will thank you and continue enjoying the high-resolution model images with transparent background.



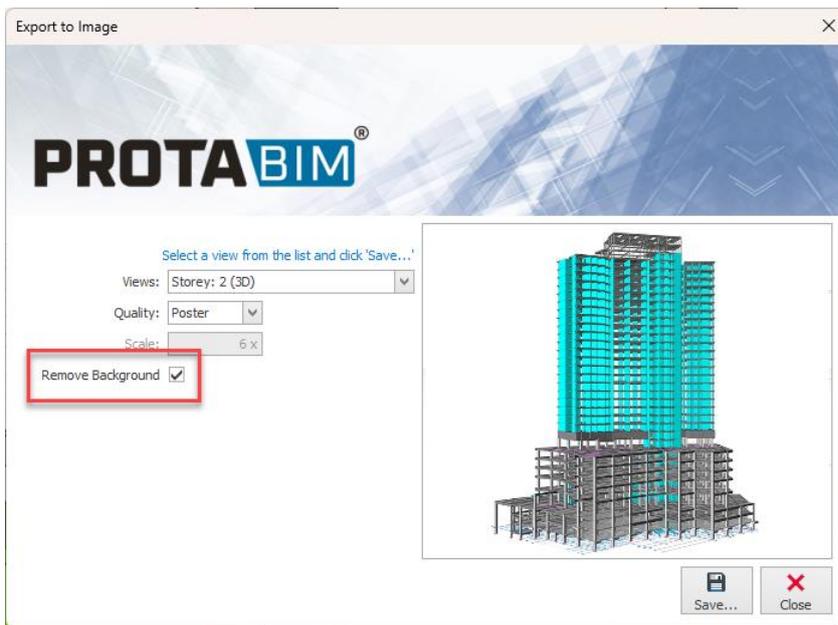
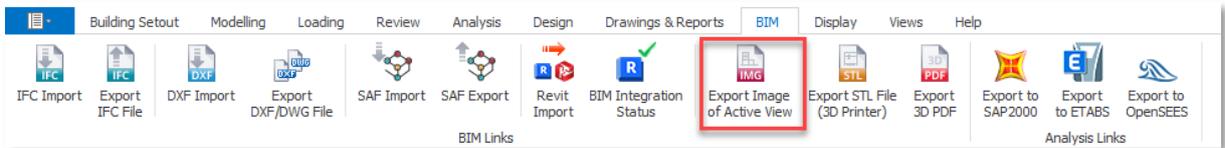


# RC Detailing




# Building Elevation Section

With ProtaStructure 2026, sections can be generated from the entire building.

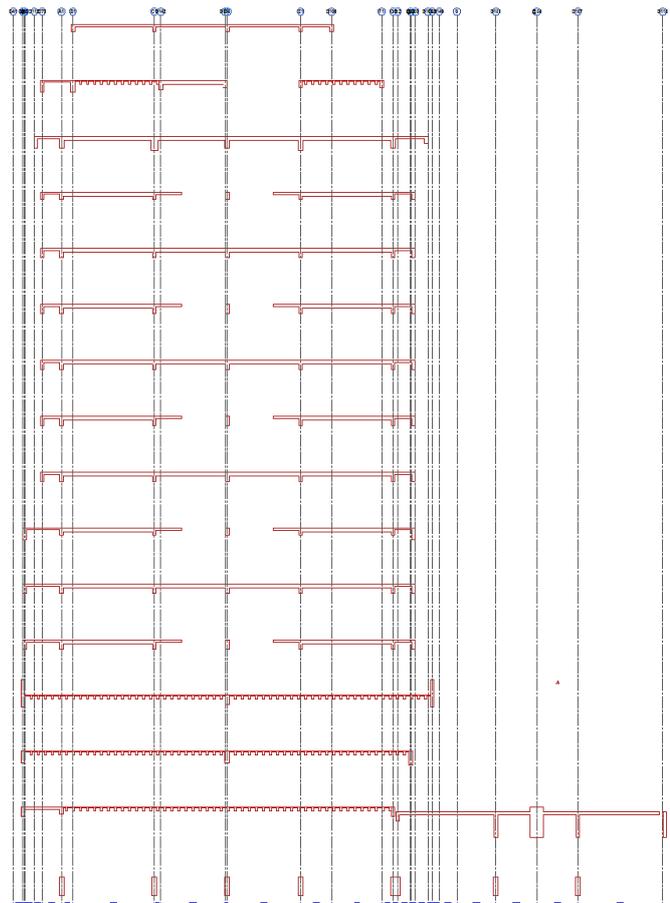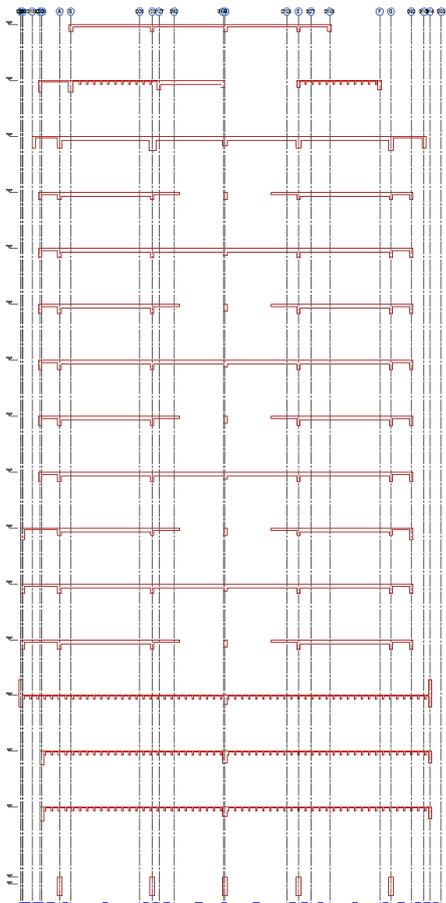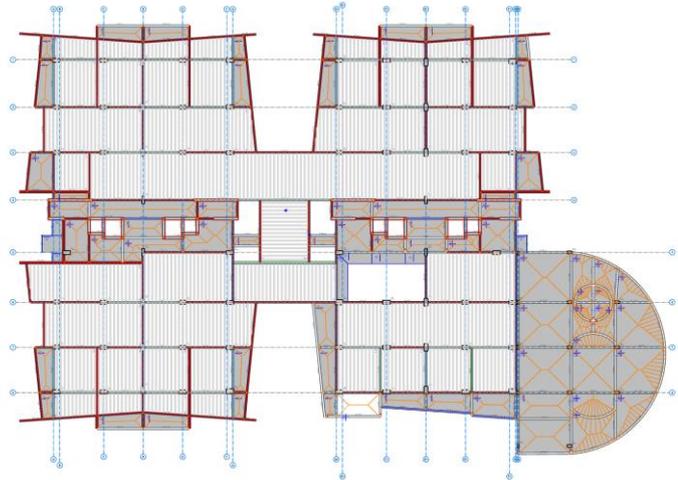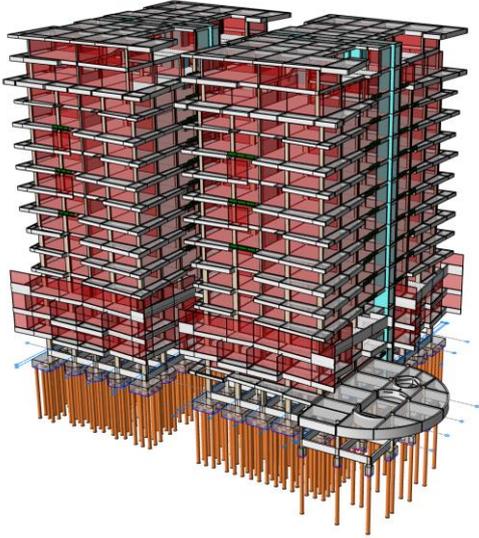


To generate a building section:

1. Create a form plan drawing on the screen.
2. Enter **Building Section** command on the command line or **Details Library** pulldown menu.

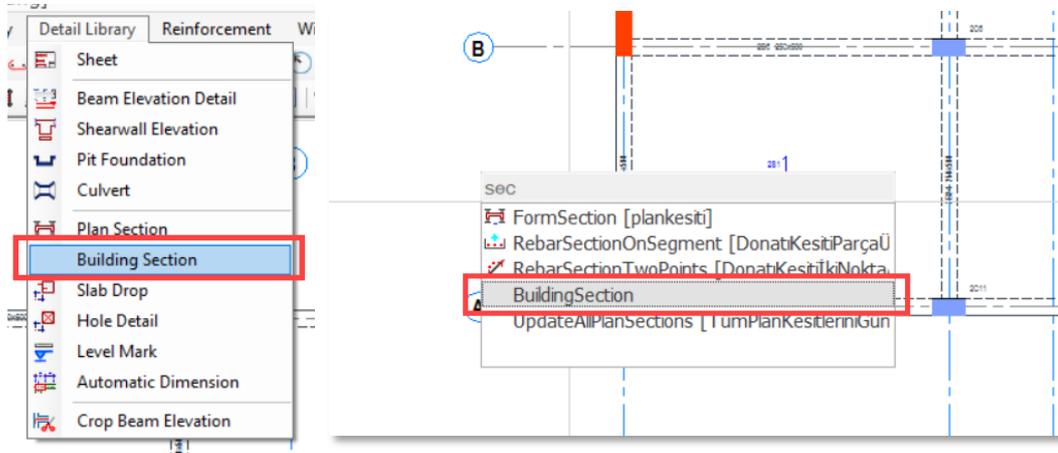



3. The Building Section properties window will be opened. Edit the parameters as required:
  - a. **Label:** Assign a label to the section.
  - b. **Show Intermediate Elements:** Infill walls will be shown on the section if this option is checked.
  - c. **Show Level Marks:** You can use this to display the level marks on the section.
  - d. **Show Dimensions:** Additional dimensions will be shown if this option is checked.
  - e. **Show Member Labels:** Structural member labels will be shown next to the members.
  - f. **Show Axes:** Axis elements will be shown.
  - g. **Show Axis Dimensions:** Axis dimensions will be drawn.
  - h. **Foundation Sections:** You can use this group of parameters to adjust the excavation line display.
4. Draw a line across the floor plan where you want to create a section.

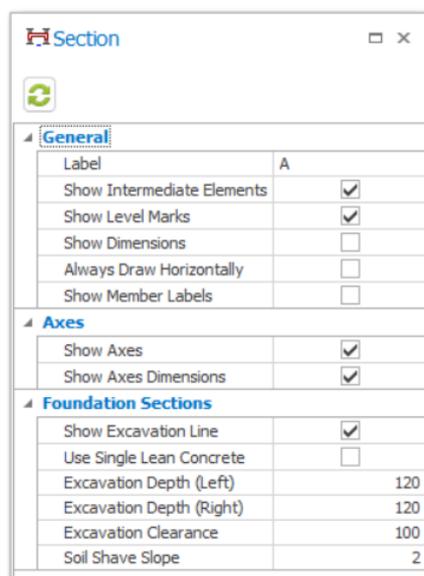

## New Bent-Up and Straight Bar Patterns for Slabs

ProtaStructure already supports a symmetrical bent-up rebar pattern for slab detailing. In the new version, asymmetrical bent-up bars can be used in slabs. Additionally, new straight bar pattern enables users to use top reinforcement in span region.

You can access the slab rebar patterns using **Options > Slab > Rebar**.

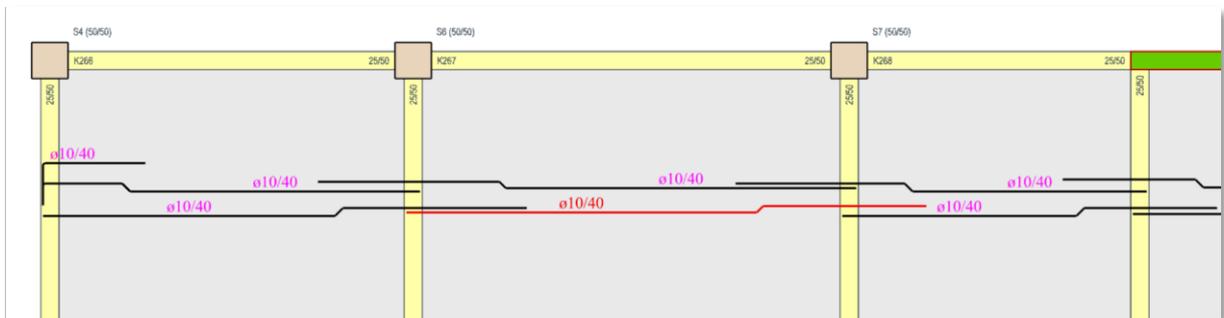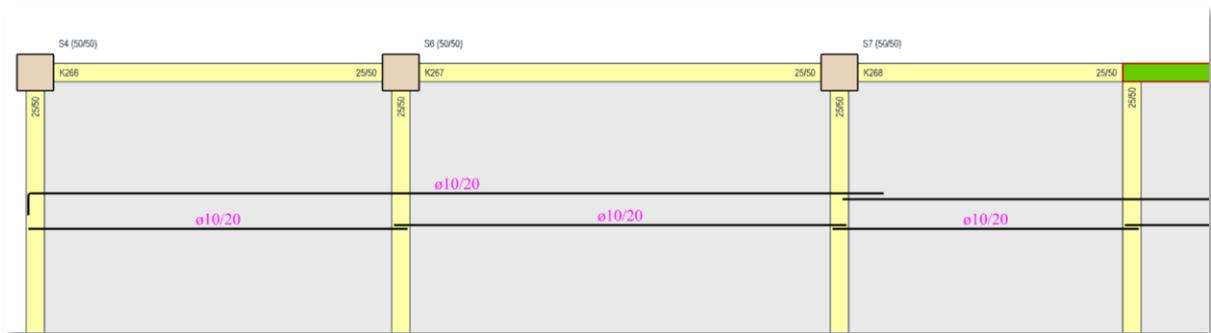


# Foundation Beams, Rib Beams and Slabs Rebar Schedule

Foundation beams, rib beams and slab rebars are now neatly presented in a tabular format, like storey beams. This makes it easy to review the designed reinforcement information briefly.

To generate the foundation beam or slab rebar schedule:

1. Pick Concrete **Beam Rebar Schedule**, **Rib Beam Rebar Schedule** or **Slab Rebar Schedule** command on the **ProtaStructure** pulldown menu.

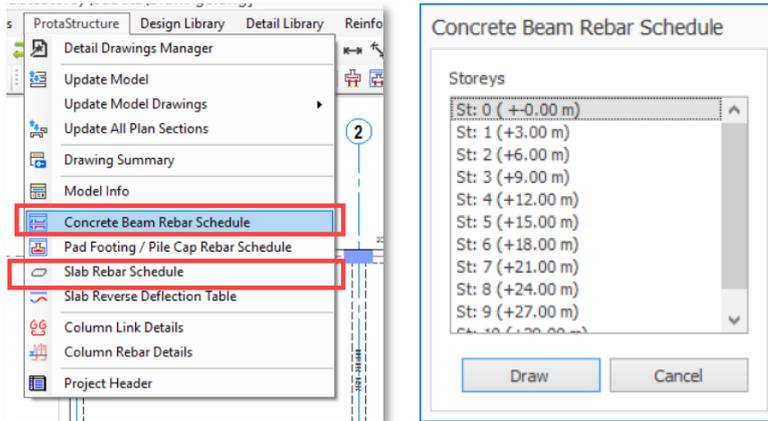


2. If you picked **Concrete Beams Schedule**, select the **Foundation Storey (Storey 0)** on the list.
3. If you picked the **Slab Rebar Schedule**, select the storeys for which you want to generate the schedule.
4. Pick a point on the screen to complete the drawing.


Beam		Top Reinforcements						Bottom Reinforcements						Links		Remarks		Strip Footing	
Mark	Width (cm)	Depth (cm)	Span (cm)	Type	Hanger	Left	Center	Right	Left	Center	Right	Left	Center	Right	Side Bars	Similar	Main Bar	Distribution Bar	
KF01A	80.00	90.00	100.00	CA	Se16			Se16				2a815	2a811	2a811	2a16		4a1420	8a820	
KF02	80.00	90.00	900.00	INT	Se16	Se16	17a16	Se16				2a815	2a820	2a815	1a12		4a1420	8a820	
KF03A	80.00	90.00	100.00	CA	Se16	Se16		Se16				2a811	2a811	2a811	2a16		4a1420	8a820	
KF03A	80.00	70.00	100.00	CA	Se16			Se16				2a815	2a820	2a815	2a14		4a1420	8a820	
KF04	60.00	70.00	700.00	INT	7a16	Se16	16a16	Se16			19a16	2a815	2a820	2a815			3a1420	8a820	
KF05	60.00	70.00	500.00	INT	7a16	Se16	14a16	Se16			19a16	2a815	2a820	2a815			2a1420	8a820	
KF05A	60.00	70.00	100.00	CA	7a16	Se16		Se16				2a811	2a811	2a811	2a16		4a1420	8a820	
KF06A	60.00	70.00	100.00	CA	7a16	Se16		Se16				2a14	2a811	2a811	2a16		4a1420	8a820	
KF06	60.00	70.00	600.00	INT	Se16	Se16	16a16	Se16			2a16	2a811	2a820	2a811	2a16		29a1420	8a820	
KF07	60.00	70.00	300.00	INT	Se16		16a16					2a811	2a820	2a811	2a14		1a1420	8a820	
KF08	60.00	70.00	400.00	E2	Se16		20a16					2a815	2a820	2a815			19a1420	8a820	
KF09A	80.00	90.00	100.00	CA	Se16	Se16		Se16				2a14	2a811	2a811	2a16		4a1420	8a820	
KF09	80.00	90.00	600.00	INT	Se16	Se16	3a16	Se16			2a14	2a815	2a820	2a815	1a12		4a1420	8a820	
KF10	80.00	90.00	700.00	INT	Se16	Se16	1a16	Se16			25a16	2a815	2a820	2a815	1a12		3a1420	8a820	
KF10A	80.00	90.00	100.00	CA	Se16	Se16		Se16				2a811	2a811	2a811	2a16		4a1420	8a820	
KF11A	60.00	70.00	100.00	CA	Se16			Se16				2a811	2a811	2a811	1a16		4a1420	8a820	
KF11	60.00	70.00	600.00	INT	Se16	Se16	15a16	Se16				2a810	2a820	2a810			29a1420	8a820	
KF12	60.00	70.00	400.00	INT	Se16		Se16					2a14	2a811	2a811			19a1420	8a820	
KF13	60.00	70.00	500.00	INT	Se16		Se16					2a14	2a811	2a820	2a811		2a1420	8a820	
KF13A	60.00	70.00	100.00	CA	Se16	Se16		Se16				2a811	2a811	2a811	1a16		6a1420	8a820	
KF14A	60.00	70.00	100.00	CA	Se16	Se16		Se16				3a14	2a811	2a811	1a16		4a1420	8a820	
KF14	60.00	70.00	600.00	INT	Se16	Se16	16a16	Se16			3a14	17a16	2a810	2a820	2a810		49a1420	8a820	
KF15	60.00	70.00	1700.00	INT	Se16	Se16	12a16	Se16			17a16	2a815	2a820	2a815			3a1420	8a820	
KF15A	60.00	70.00	100.00	CA	Se16	Se16		Se16				2a811	2a811	2a811	2a14		4a1420	8a820	
KF16A	60.00	70.00	100.00	CA	Se16	Se16		Se16				2a811	2a811	2a811	1a16		4a1420	8a820	
KF16	60.00	70.00	300.00	INT	Se16	Se16	Se16	Se16				2a811	2a820	2a811	1a16		1a1420	8a820	
KF17	60.00	70.00	400.00	INT	Se16	Se16	12a16	Se16				2a14	2a815	2a820	2a815		19a1420	8a820	
KF17A	60.00	70.00	100.00	CA	Se16	Se16		Se16				2a811	2a811	2a811	2a14		4a1420	8a820	
KF18A	60.00	70.00	100.00	CA	Se16	Se16		Se16				2a811	2a811	2a811	1a16		4a1420	8a820	
KF18	60.00	70.00	400.00	INT	Se16	Se16	10a16	Se16				2a811	2a820	2a811			19a1420	8a820	
KF18B	60.00	70.00	100.00	CA	Se16	Se16		Se16				2a811	2a811	2a811	1a16		4a1420	8a820	

## Subbasement Wall Details

Subbasement wall reinforcement design IS NOT performed by ProtaStructure. We expect the user to enter longitudinal and horizontal reinforcement information. Detail drawings are created accordingly. Rebar information for the subbasement walls can be introduced using the **Rebar** tab on the **Wall Property** window.


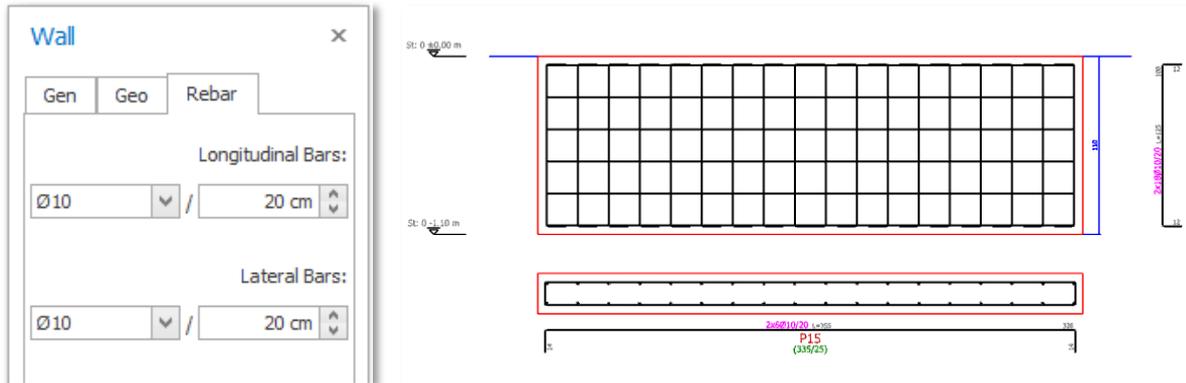


You can generate subbasement wall details using **Shearwall Elevations** and **Shearwall Schedules** or **Column Application** commands in ProtaDetails. Foundation Storey was added to these categories to draw the subbasement wall details.

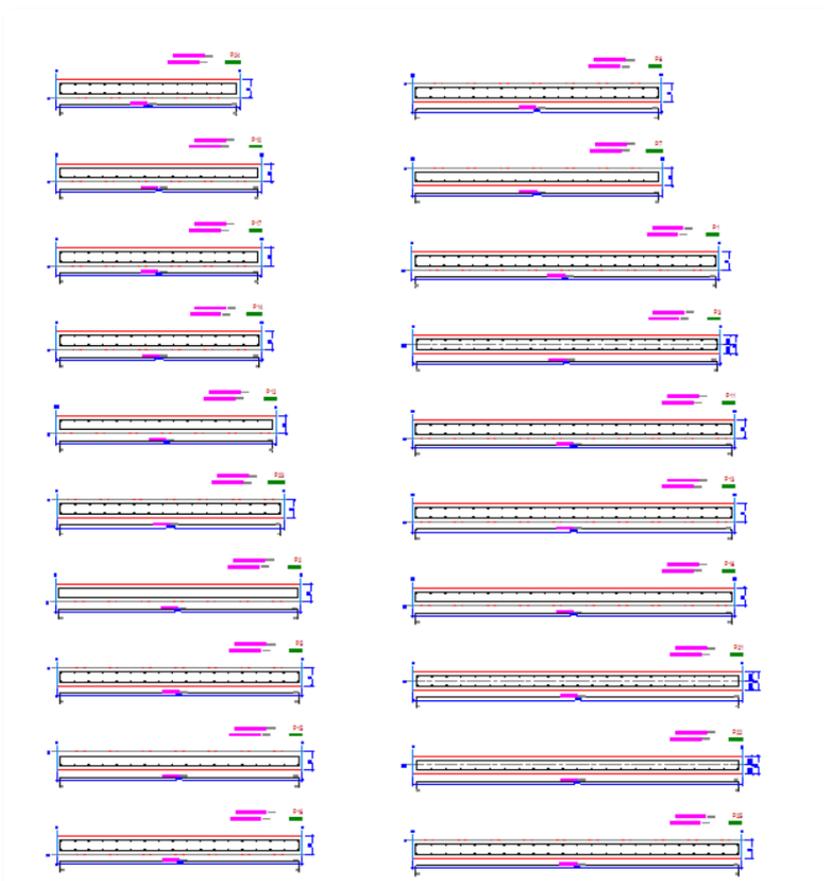


# Pedestal Details

After you have designed pedestals in ProtaStructure, you can push them down to ProtaDetails for RC detailing just like other reinforced concrete members. You can use the Column Elevations and Column Application Details for generating the pedestal details. The **Foundation Storey** is added to these categories for this purpose.

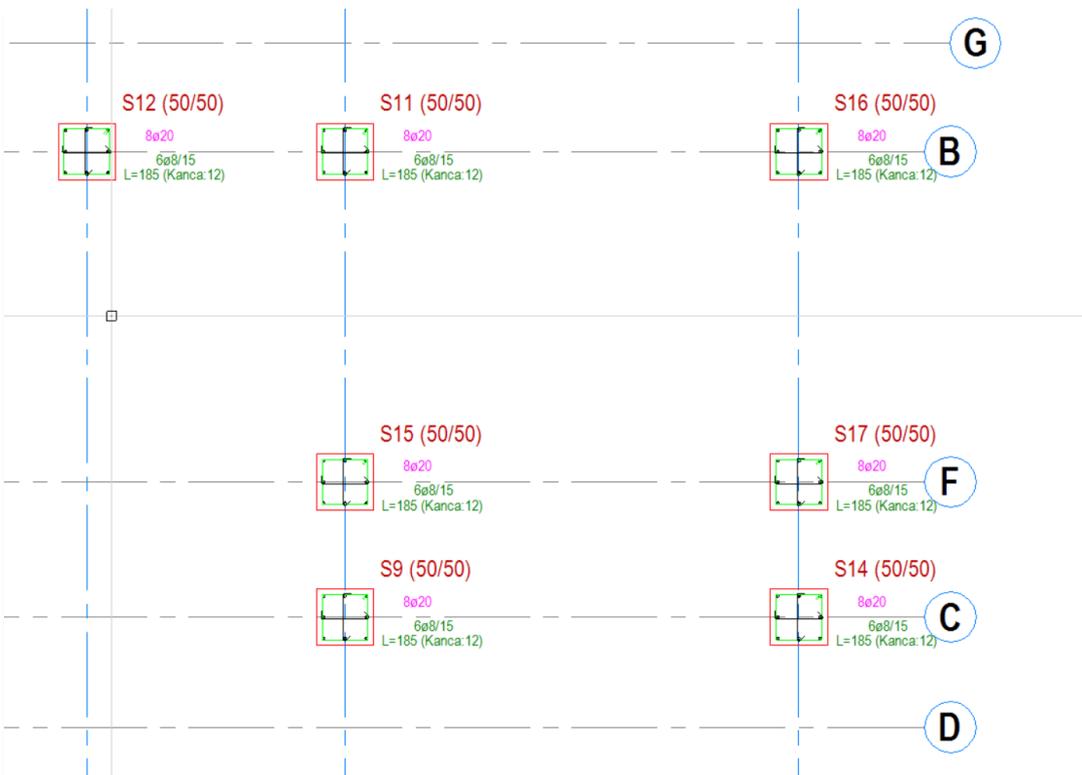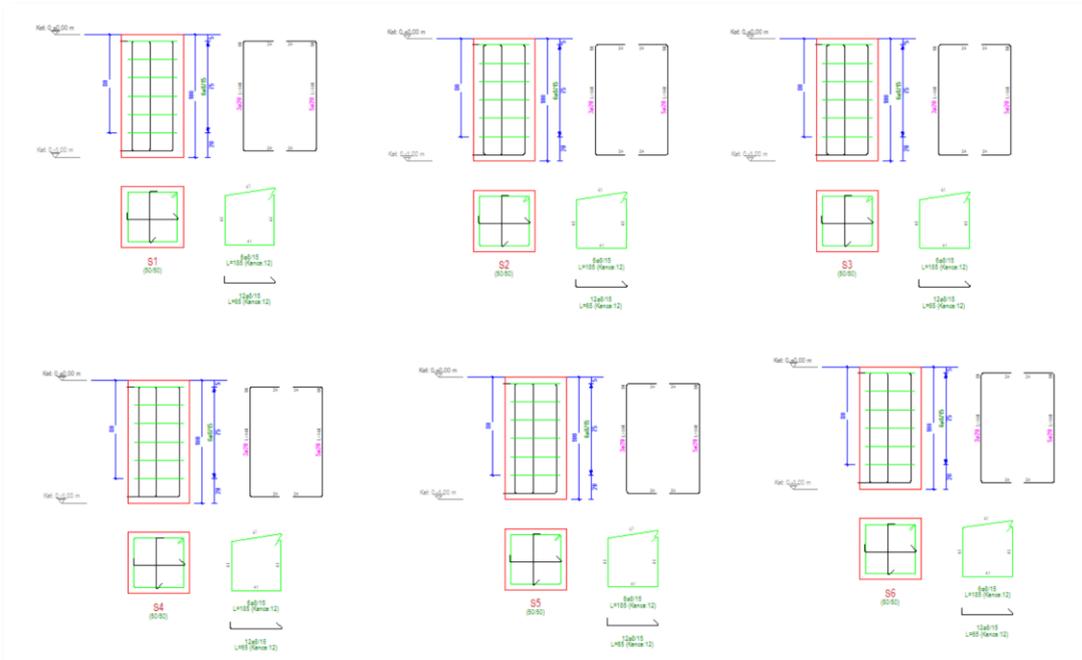

You can use ProtaSteel to obtain the anchor detail drawings of pedestals with steel base plates defined on top of them.

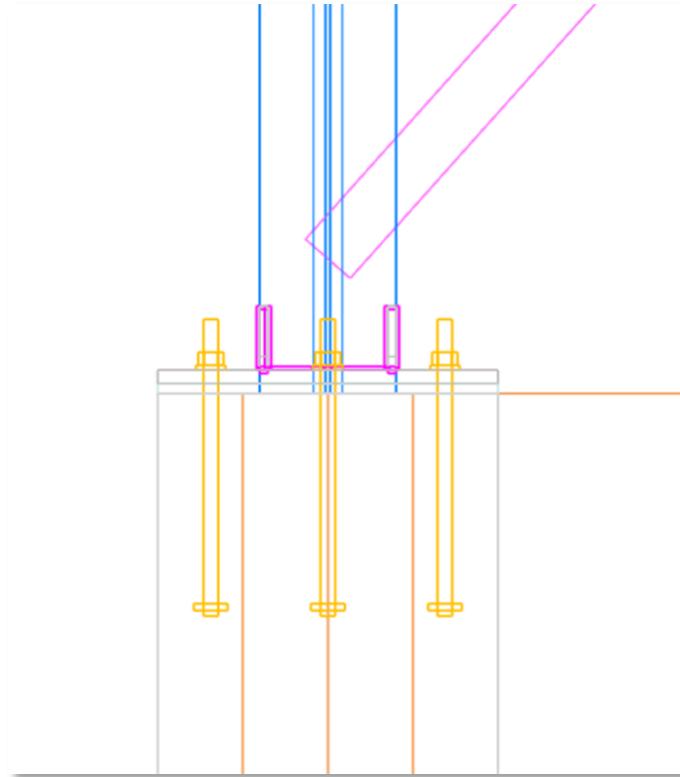

# ProtaSteel: Innovating with Strength



## Export Internal Forces to IdeaStatica

In our previous version, we introduced the IdeaStatica export feature, which received great feedback from our users. In this version, we have enhanced it further by allowing users to export the internal forces acting on the connections to IdeaStatica in a tabular format.

The screenshot displays the ProtaSteel software interface. A dialog box titled "Import of load effects" is open, showing a table of internal forces for various load effects (LE1 to LE5) across different members (M182, M203, M197) at their beginning and end positions. The table includes columns for axial force (N [kN]), shear forces (Vy [kN], Vz [kN]), and bending moments (Mx [kNm], My [kNm], Mz [kNm]).


Below the dialog box, an Excel spreadsheet is shown, displaying the internal force data for a specific load effect (1.2G+1.6Q). The spreadsheet has columns for Load, Beam, Position, N[kN], Vy[kN], Vz[kN], Mz[kNm], My[kNm], and Mx[kNm]. A red arrow points from the dialog box to the spreadsheet, indicating the export of data.

Name	Member	Position	N [kN]	Vy [kN]	Vz [kN]	Mx [kNm]	My [kNm]	Mz [kNm]
LE1	M182	Begin	0.0	0.0	0.0	0.0	-0.7	-0.8
	M203	End	0.0	0.0	0.0	0.0	1.0	0.0
	M197	End	0.0	0.0	0.0	0.0	0.9	0.0
LE2	M182	Begin	0.0	0.0	0.0	0.0	-0.7	-0.8
	M203	End	0.0	0.0	0.0	0.0	0.0	0.0
	M197	End	0.0	0.0	0.0	0.0	0.0	0.0
LE3	M182	Begin	0.0	0.0	0.0	0.0	0.0	0.0
	M203	End	0.0	0.0	0.0	0.0	0.0	0.0
	M197	End	0.0	0.0	0.0	0.0	0.0	0.0
LE4	M182	Begin	0.0	0.0	0.0	0.0	0.0	0.0
	M203	End	0.0	0.0	0.0	0.0	0.0	0.0
	M197	End	0.0	0.0	0.0	0.0	0.0	0.0
LE5	M182	Begin	0.0	0.0	0.0	0.0	0.0	0.0
	M203	End	0.0	0.0	0.0	0.0	0.0	0.0
	M197	End	0.0	0.0	0.0	0.0	0.0	0.0




## Purlin Connections on Curved Beams

The connection of purlins on curved beams can now be easily made with the purlin connection macro. Purlin connection macro supports different connection types. **IntelliConnect** tools can also be used to create connections more quickly.

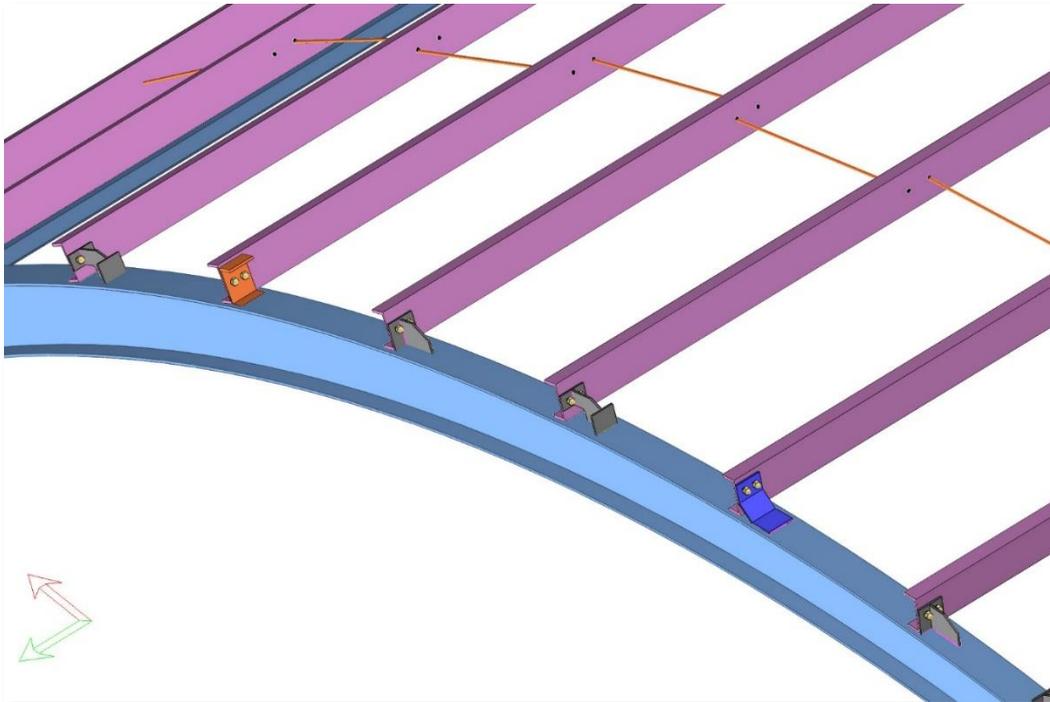


## Splice Connections in Pipe and Box Sections

With ProtaSteel 2026, the splice connection details for pipe and rectangular section profiles can be easily created using the “**End Plate Splice Macro**”. In the macro properties window, the number of bolts and their arrangement can be adjusted after selecting the “**circular section settings**”.

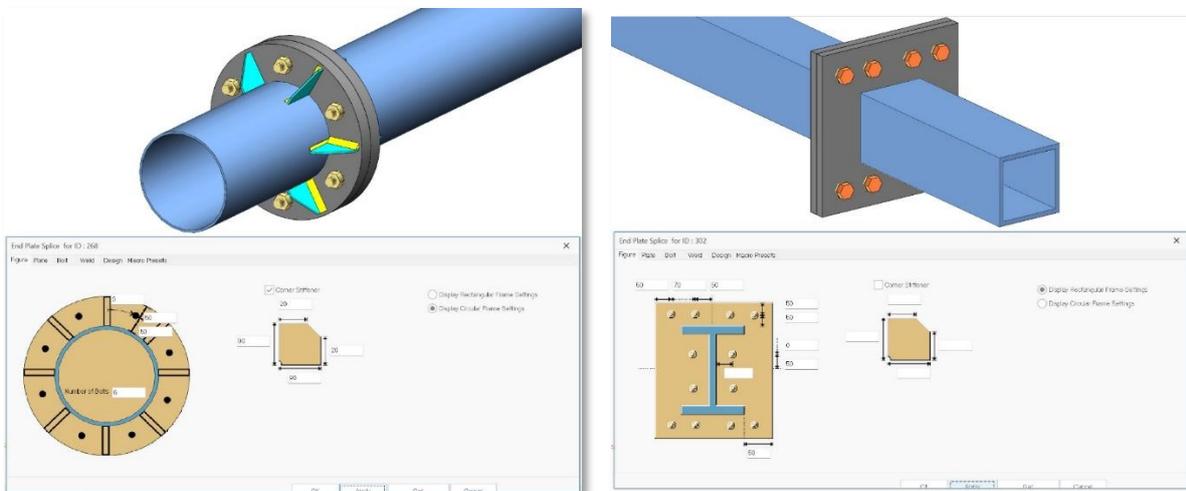


## Fin Plate Connections to SHS and RHS Primary Members

The “Fin Plate Macro” that is used to create beam-to-column and beam-to-beam hinged connections now supports main profiles made of hollow sections, including SHS (Square Hollow Sections) and RHS (Rectangular Hollow Sections).

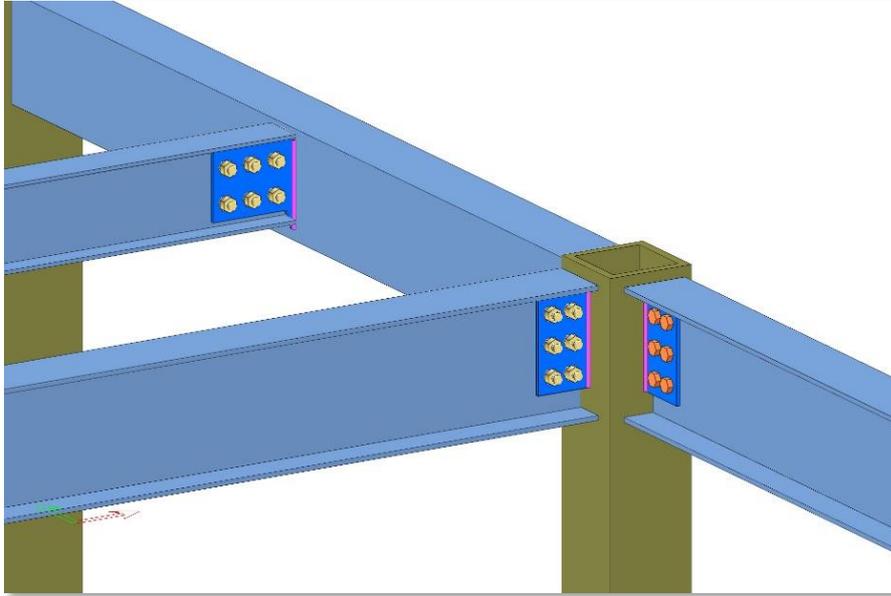


## Connection Macros for Truss Top and Bottom Chords

In ProtaSteel 2026, truss-to-truss and truss-to-column connections are supported by beam-to-beam and beam-to-column connections such as Beam to Column End Plate, Stiffener End Plate, Fin Plate, Beam to Beam Angle Cleat, Beam to Beam End Plate. These connections can be applied on the strong and weak directions of the main members.

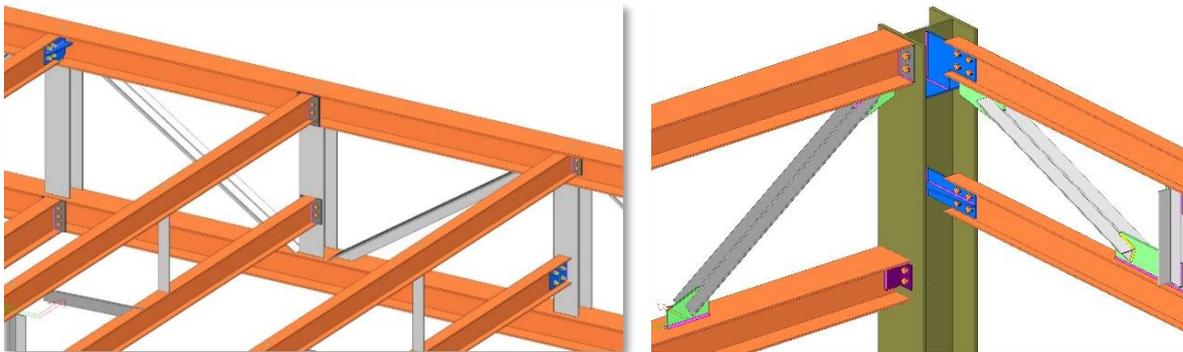


## IFC 4 Support

ProtaSteel V2026 comes with IFC4 support. All detailing objects and the entire model created in ProtaSteel can be exported in IFC file. Thus, you can be involved in project development processes with globally accepted IFC files.

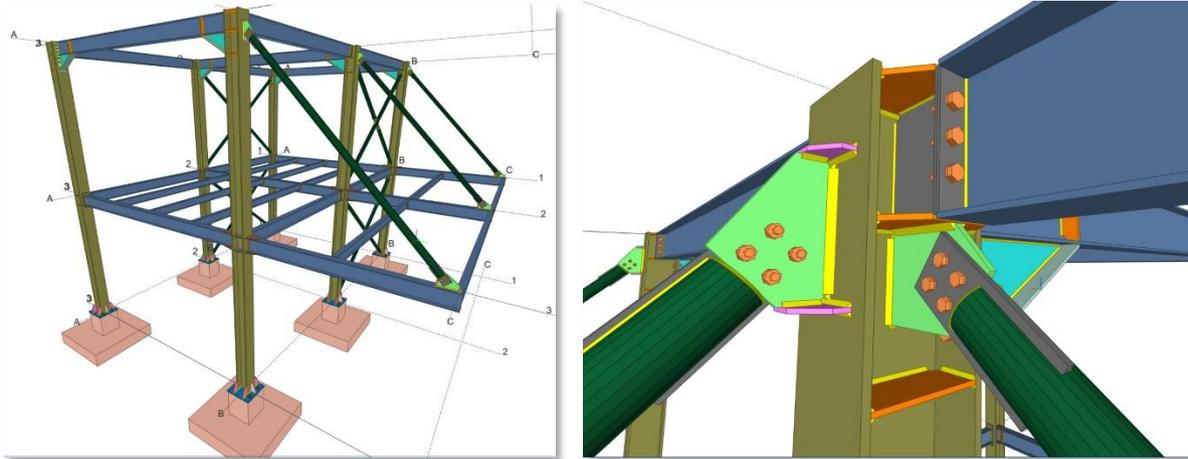

## Improved Curved Beam Connections

You can now handle more cases with curved beams including a wider range of approach angles and purlin connections with the curved members.

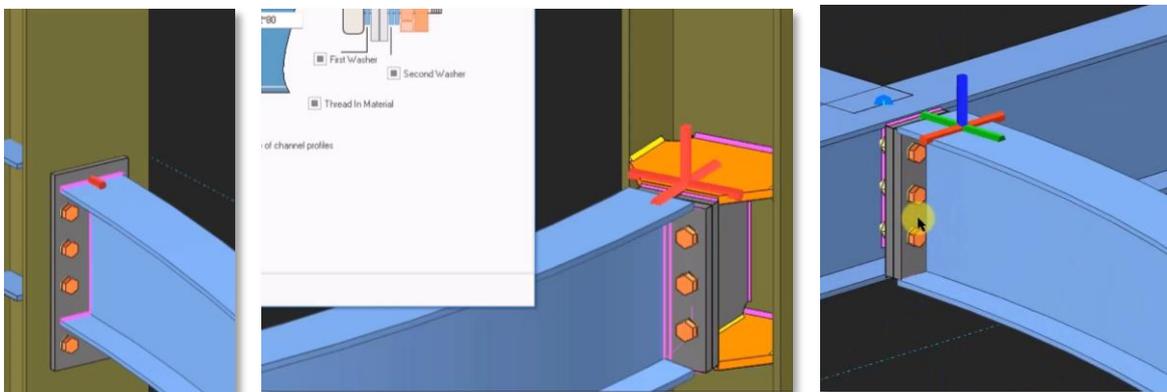

# General Stability and Performance Improvements

Based on our quality control procedures and user feedback, significant stability and performance improvements have been made to all products in the **2025 family**. Most of these improvements and new features have been delivered to you throughout the year with the ProtaStructure 2025 maintenance updates. The details of these updates can be found in the "**Release Notes**" section on our help center with references to relevant customer ticket numbers.

## New Design Guides and Videos

We have been working hard to provide extensive documentation, videos, and webinars on numerous topics to improve your experience and knowledge of ProtaStructure.

New design guides have been published with ProtaStructure 2026 release. Visit Prota Help Center's Knowledge Base and our website's 'Whitepaper' section to learn about the latest design guides.

Prota Help Center Knowledge Base:

<https://support.protasoftware.com/>

Protasoftware.com Whitepapers:

<https://www.protasoftware.com/whitepaper>

In addition to design guides, we have been conducting new webinars and publishing recordings. Also, our technical team is always busy creating video content on ProtaStructure features, usage, and theory. Please subscribe to our YouTube channel to get notified of new content.

<https://www.youtube.com/c/ProtaStructure>

## What's Next?

While we strive to include as many improvements as possible in each major version, some items may be delayed beyond the initial release. Rest assured; we're committed to delivering them in subsequent updates to our user with active maintenance.



# Thank You

Thank you for choosing the ProtaStructure Suite product family.

At Prota, our continual aim is to provide you with user-friendly, industry-leading technology for building design and documentation.

Should you have any technical support requests or questions, please do not hesitate to contact us at all times through [globalsupport@protasoftware.com](mailto:globalsupport@protasoftware.com) or [asiastsupport@protasoftware.com](mailto:asiastsupport@protasoftware.com) (Asia Pacific)

Our dedicated online support center is available to help you get the most out of Prota's technology solutions with our responsive technical support team.

The Prota Team

